Next Vision Display
Brighten The Future

NEXT VISION DISPLAY

SPECIFICATION

CUSTOMER : _____

MODULE NO.: NL013FN001ML

Version	A
Engineer	
Date	October 15, 2008

Next Vision Display
Brighten The Future

Customer:
Approved by

NEXT VISION DISPLAY CO., LTD.

地址: 中國上海小木橋路600號
ADD: 600 XIAO MU QIAO ROAD, SHANGHAI, CHINA

WEB: www.nextvisiondisplay.com

TECHNICAL: technical@nextvisiondisplay.com
MARKETING: marketing@nextvisiondisplay.com
SALES: sales@nextvisiondisplay.com

Contents

Revision History ..... ***i***
Notice ..... ***ii***
Contents ..... ***iii***
1. Basic Specifications ..... ***1~6***
1.1 Display Specifications 1
1.2 Mechanical Specifications 1
1.3 Active Area & Pixel Construction 1
1.4 Mechanical Drawing 2
1.5 Pin Definition 3
1.6 Block Diagram 6
2. Absolute Maximum Ratings ***7***
3. Optics & Electrical Characteristics ..... ***8~12***
3.1 Optics Characteristics 8
3.2 DC Characteristics 8
3.3 AC Characteristics 9
3.3.1 68XX-Series MPU Parallel Interface Timing Characteristics 9
3.3.2 80XX-Series MPU Parallel Interface Timing Characteristics 10
3.3.3 Serial Interface Timing Characteristics (4-wire SPI) 11
3.3.4 Serial Interface Timing Characteristics (3-wire SPI) 12
4. Functional Specification ..... ***13~14***
4.1 Comm ands 13
4.2 Power down and Power up Sequence 13
4.2.1 Power up Sequence 13
4.2.2 Power down Sequence 13
4.3 Reset Circuit 13
4.4 Actual Application Example 14
5. Reliability ***15***
5.1 Contents of Reliability Tests 15
5.2 Lifetim e 15
5.3 Failure Check Standard 15
6. Outgoing Quality Control Specifications ..... ***16~20***
6.1 Environm ent Required 16
6.2 Sa mpling Plan 16
6.3 Criteria & Acceptable Quality Level 16
6.3.1 Cosmetic Check (Display Off) in Non-Active Area 16
6.3.2 Cosmetic Check (Display Off) in Active Area 19
6.3.3 Pattern Check (Display On) in Active Area 20
7. Package Specifications ***21***

CONFIDENTIAL
Next Vision Display
Brighten The Future

8. Precautions When Using These OEL Display Modules..... 22~24
8.1 Handling Precautions 22
8.2 S torage Precautions.....23
8.3 Designing Precautions 23
8.4 Precautions when disposing of the OEL display modules.....24
8.5 Other Precautions.....24

CONFIDENTIAL
Next Vision Display
Brighten The Future

1. Basic Specifications

1.1 Display Specifications


1) Display Mode: Passive Matrix
2) Display Color: 262,144 Colors (Maximum)
3) Drive Duty: 1/96 Duty

1.2 Mechanical Specifications


1) Outline Drawing: According to the annexed outline drawing
2) Number of Pixels: 128 (RGB) × 96
3) Panel Size: 33.70 × 26.90 × 1.60 (mm)
4) Active Area: 25.708 × 19.28 (mm)
5) Pixel Pitch: 0.067 × 0.201 (mm)
6) Pixel Size: 0.047 × 0.185 (mm)
7) W eight: 2.92 (g)


1.3 Active Area & Pixel Construction

CONFIDENTIAL
Next Vision Display
Brighten The Future

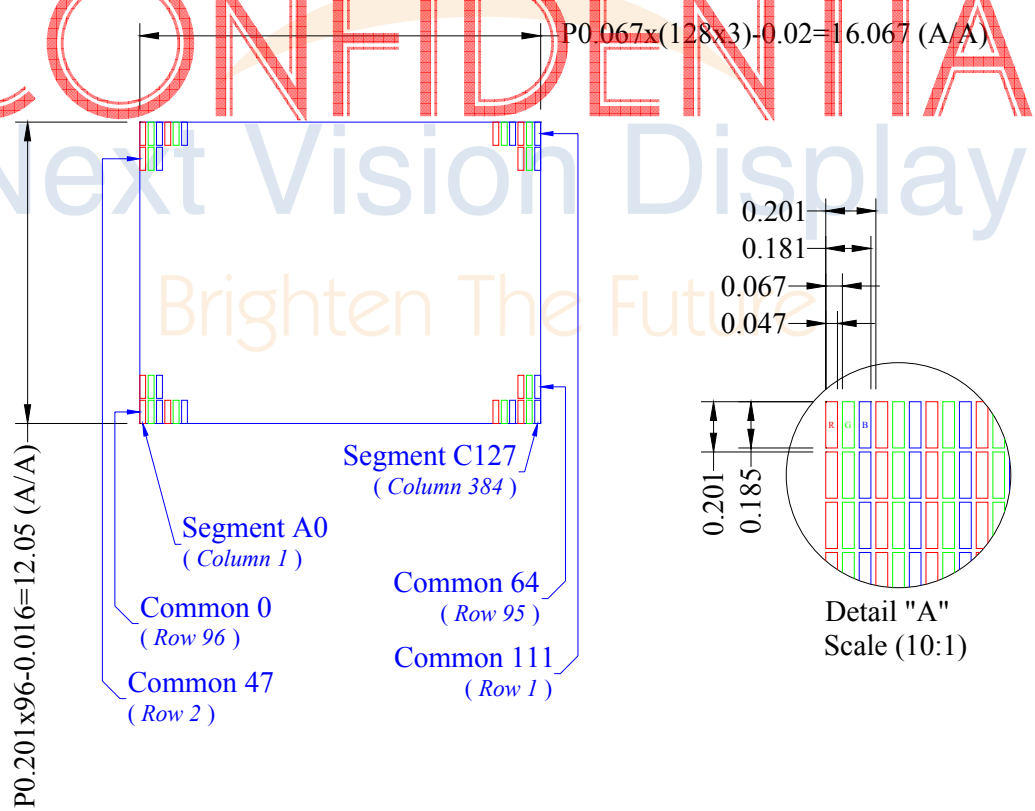



Item	Date	Remark
A	20080815	Original Drawing

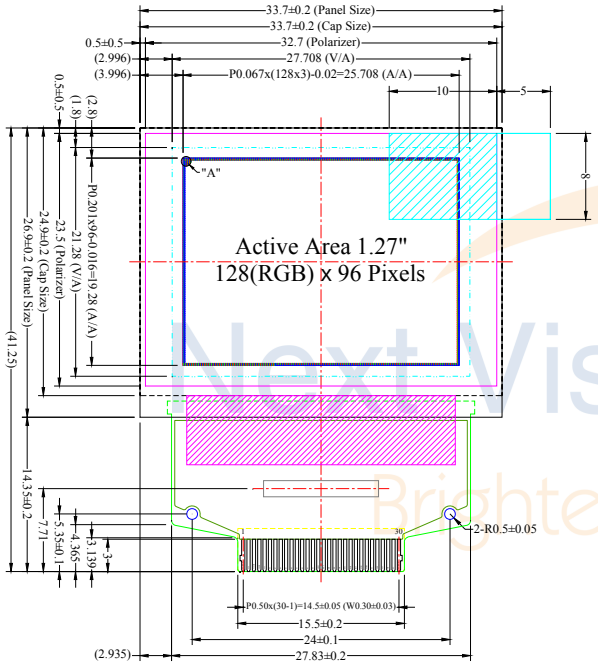

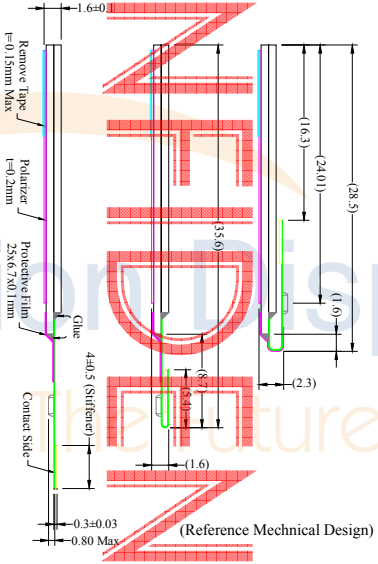

(Reference Mechnical Design)





Detail "A"
Scale (10:1)

Pin	Symbol
1	N.C. (GND)
2	VCC
3	VCOMH
4	VDDIO
5	VSL
6	N.C.
7	D7
8	D6
9	D5
10	D4
11	D3
12	D2
13	D1
14	D0
15	E/RD#
16	R/W#
17	BS0
18	BS1
19	CS#
20	D/C#
21	RES#
22	IREF
23	GPIO1
24	GPIO0
25	N.C.
26	VDD
27	VCI
28	VSS
29	N.C.
30	N.C. (GND)

Notes:

1. Driver IC: SSD1351
2. Die Size: 10700um x 1500um
3. COF Number: SSD1351U3
4. Interface:
   8-bits 68XX/80XX Parallel, 3-/4-wire SPI
5. General Tolerance: ±0.30
6. The total thickness (1.70 Max) is without polarizer protective film & remove tape.
   The actual assembled total thickness with above materials should be 1.95 Max.

NL013FN001ML

Customer Approval Signature	OLED Display module					Drawing Number	Rev.
						DFE2896CNCF13	A
	Unless Specified Unit mm General Roughness	Title	Folding Type OEL Display Module Pixel Number: 128(RGB) x 96, 262144 Colors, COF Package			Material	
						Soda Lime / Polyimide	
	Tolerance		Drawn	E.E.	Panel / E.	P.M.	
	Dimension ±0.3	By	Humphrey Lin	Sean Lai	Ivy Lo	Cherry Lin	Scale / Sheet / Size
	Angle ±1	Date	20080815	20080815	20080815	20080815	1:1 / 1 of 1 / A3

Next Vision Display
Brighten The Future

1.5 Pin Definition

Pin Number	Symbol	Type	Function
Power Supply			
27 VCI		P	*Power Supply for Operation* This is a voltage supply pin. It must be connected to external source & always be equal to or higher than VDD & VDDIO.
26 VDD		P	*Power Supply for Core Logic Circuit* This is a voltage supply pin which is regulated internally from VCI. A capacitor should be connected between this pin & VSS under all circumstances.
4 VDDIO		P	*Power Supply for I/O Pin* This pin is a power supply pin of I/O buffer. It should be connected to VCI or external source. All I/O signal should have VIH reference to VDDIO. When I/O signal pins (BS0~BS1, D0~D7, control signals…) pull high, they should be connected to VDDIO.
28 VSS		P	*Ground of OEL System* This is a ground pin. It also acts as a reference for the logic pins, the OEL driving voltages, and the analog circuits. It must be connected to external ground.
2 VCC		P	*Power Supply for OEL Panel* This is the most positive voltage supply pin of the chip. It must be connected to external source.
Driver			
22 IREF		I	*Current Reference for Brightness Adjustment* This pin is segment current reference pin. A resistor should be connected between this pin and VSS. Set the current lower than 12.5uA.
3 VCOMH		P	*Voltage Output High Level for COM Signal* This pin is the input pin for the voltage output high level for COM signals. A tantalum capacitor should be connected between this pin and VSS.
5 VSL		P	*Voltage Output Low Level for SEG Signal* This is segment voltage reference pin. When external VSL is not used, this pin should be left open. When external VSL is used, this pin should connect with resistor and diode to ground.
External IC Control			
24 23	GPIO0 GPIO1	I/O	*General Purpose Input/Output* These pins could be left open individually or have signal inputted/outputted. They are able to use as the external DC/DC converter circuit enabled/disabled control or other applications.

CONFIDENTIAL
Next Vision Display
Brighten Your Vision

1.5 Pin Definition (Continued)

<table>
<tr><th>Pin Number</th><th>Symbol</th><th>I/O</th><th>Function</th></tr>
<tr><td colspan="4">Interface</td></tr>
<tr><td>17
18</td><td>BS0
BS1</td><td>I</td><td>Communicating Protocol Select
These pins are MCU interface selection input. See the following table:
<table>
<tr><th>BS0</th><th></th><th>BS1</th></tr>
<tr><td>3-wire SPI</td><td>1</td><td>0</td></tr>
<tr><td>4-wire SPI</td><td>0</td><td>0</td></tr>
<tr><td>68XX-parallel (8-bit)</td><td>1</td><td>1</td></tr>
<tr><td>80XX-parallel (8-bit)</td><td>0</td><td>1</td></tr>
</table></td></tr>
<tr><td>21 RES#</td><td></td><td>I</td><td>Power Reset for Controller and Driver
This pin is reset signal input. When the pin is low, initialization of the chip is executed.</td></tr>
<tr><td>19 CS#</td><td></td><td>I</td><td>Chip Select
This pin is the chip select input. The chip is enabled for MCU communication only when CS# is pulled low.</td></tr>
<tr><td>20 D/C#</td><td></td><td>I</td><td>Data/Command Control
This pin is Data/Command control pin. When the pin is pulled high, the input at D7~D0 is treated as display data. When the pin is pulled low, the input at D7~D0 will be transferred to the command register. For detail relationship to MCU interface signals, please refer to the Timing Characteristics Diagrams.
When 3-wire serial mode is selected, this pin must be connected to VSS.</td></tr>
<tr><td>15 E/RD#</td><td></td><td>I</td><td>Read/Write Enable or Read
This pin is MCU interface input. When interfacing to a 68XX-series microprocessor, this pin will be used as the Enable (E) signal. Read/write operation is initiated when this pin is pulled high and the CS# is pulled low.
When connecting to an 80XX-microprocessor, this pin receives the Read (RD#) signal. Data read operation is initiated when this pin is pulled low and CS# is pulled low.
When serial mode is selected, this pin must be connected to VSS.</td></tr>
<tr><td>16 R/</td><td>W#</td><td>I</td><td>Read/Write Select or Write
This pin is MCU interface input. When interfacing to a 68XX-series microprocessor, this pin will be used as Read/Write (R/W#) selection input. Pull this pin to “High” for read mode and pull it to “Low” for write mode.
When 80XX interface mode is selected, this pin will be the Write (WR#) input. Data write operation is initiated when this pin is pulled low and the CS# is pulled low.
When serial mode is selected, this pin must be connected to VSS.</td></tr>
<tr><td>7~14 D7~D0</td><td></td><td>I/O</td><td>Host Data Input/Output Bus
These pins are 8-bit bi-directional data bus to be connected to the microprocessor’s data bus. When serial mode is selected, D1 will be the serial data input SDIN and D0 will be the serial clock input SCLK.
Unused pins must be connected to VSS except for D2.</td></tr>
</table>


CONFIDENTIAL
Next Vision Display
Brighten The Future

1.5 Pin Definition (Continued)

Pin Number	Symbol	I/O	Function
Reserve			
6, 25, 29	N.C.	-	*Reserved Pin* The N.C . pi ns between fu nction pi ns are reserved for compatible and flexible design.
1, 30	N.C. (GND)	-	*Reserved Pin (Supporting Pin)* The supporting pins ca n reduce t he i nfluences f rom stresses on t he fu nction pins. T hese pins m ust be connected to external ground.

CONFIDENTIAL
Next Vision Display
Brighten The Future

1.6 Block Diagram

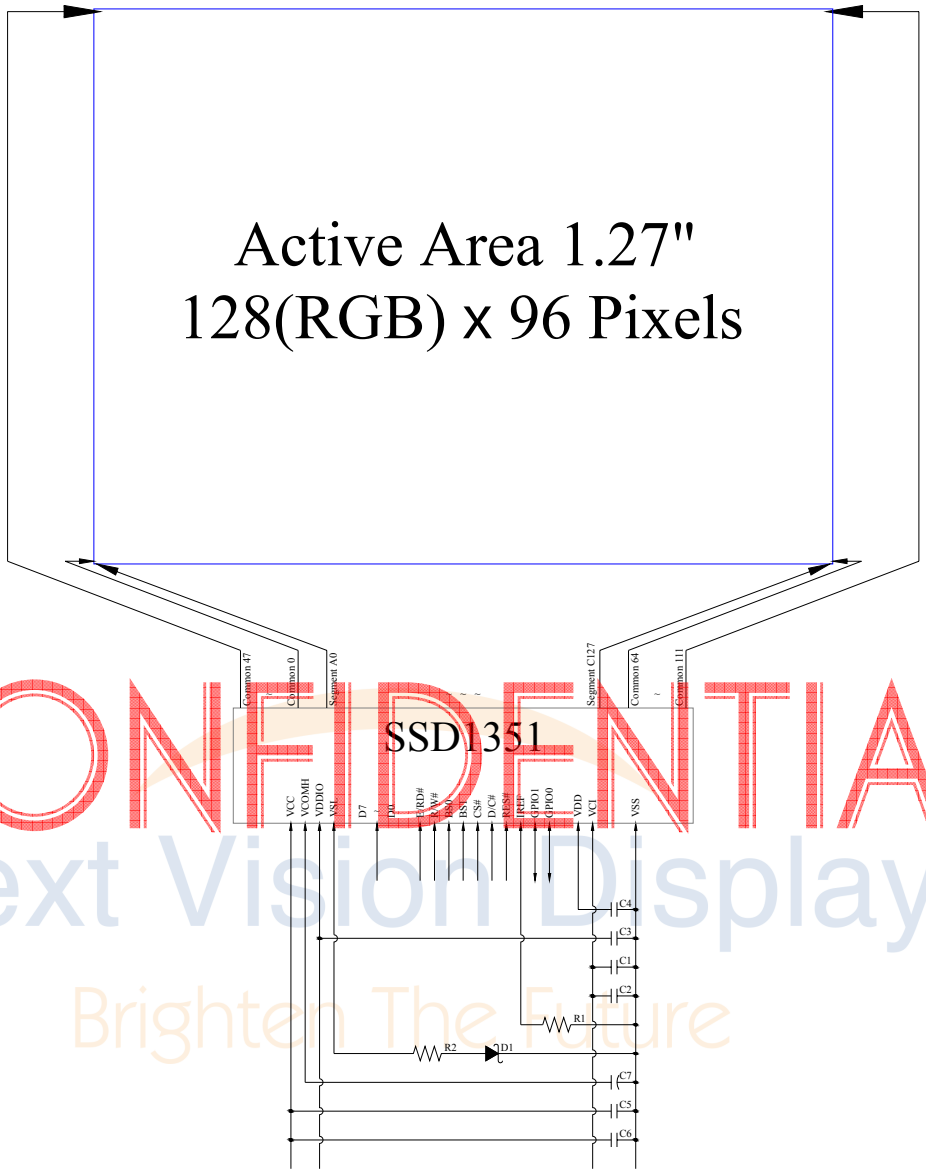

CONFIDENTIAL
Next Vision Display
Brighten The Future

MCU Interface Selection: BS0 and BS1
Pins connected to MCU interface: D7~D0, E/RD#, R/W#, CS#, D/C#, and RES#

C1, C5: 0.1µF
C2: 4.7 µF
C6: 10 µF
C3, C4: 1µF
C7: 4.7uF / 25V Tantalum Capacitor
R1: 560k Ω, R1 = (Voltage at IREF – VSS) / IREF
R2: 50 Ω, 1/4W
D1: ≤1.4V, 0.5W

2. *Absolute Maximum Ratings*

Parameter Symbol		Min	Max	Unit	Notes
Supply Voltage for Operation	V_{CI} -0.3		4	V	1, 2
Supply Voltage for Logic	V_{DD} -0.5		2.75	V	1, 2
Supply Voltage for I/O Pins	V_{DDIO} -0.5		V_{CI} V		1, 2
Supply Voltage for Display	V_{CC} -0.5		16	V	1, 2
Operating Temperature	T_{OP} -30		70	°C	-
Storage Temperature	T_{STG} -40		80	°C	-

Note 1: All the above voltages are on the basis of "VSS = 0V".

Note 2: When this module is used beyond the above absolute maximum ratings, permanent breakage of the module may occur. Also, for normal operations, it is desirable to use this module under the conditions according to Section 3. "Optics & Electrical Characteristics". If this module is used beyond these conditions, malfunctioning of the module can occur and the reliability of the module may deteriorate.

CONFIDENTIAL
Next Vision Display
Brighten The Future

3. Optics & Electrical Characteristics

3.1 Optics Characteristics

Characteristics Symbol		Conditions	Min	Typ	Max	Unit
Brightness (White)	L_{br}	With Polarizer (Note 3)	80	100	-	cd/m^2
C.I.E. (White)	(x) (y)	With Polarizer	0.26 0.29	0.30 0.33	0.34 0.37	
C.I.E. (Red)	(x) (y)	With Polarizer	0.60 0.30	0.64 0.34	0.68 0.38	
C.I.E. (Green)	(x) (y)	With Polarizer	0.27 0.58	0.31 0.62	0.35 0.66	
C.I.E. (Blue)	(x) (y)	With Polarizer	0.10 0.12	0.14 0.16	0.18 0.20	
Dark Room Contrast	CR		-	>2000:1	-	
View Angle			>160	-	-	degree

* Optical measurement taken at V_{CI} = 2.8V, V_{CC} = 12V.
Software configuration follows Section 4.4 Initialization.

CONFIDENTIAL
Next Vision Display
Brighten The Future

3.2 DC Characteristics

Characteristics	Symbol	Conditions	Min	Typ	Max	Unit
Supply Voltage for Operation	V_{CI}		2.4	2.8	3.5	V
Supply Voltage for Logic	V_{DD}		2.4	2.5	2.6	V
Supply Voltage for I/O Pins	V_{DDIO}		1.65	1.8	V_{CI}	V
Supply Voltage for Display	V_{CC}	Note 3	11.5	12	12.5	V
High Level Input	V_{IH}		0.8×V_{DDIO}	-	V_{DDIO}	V
Low Level Input	V_{IL}		0	-	0.2×V_{DDIO}	V
High Level Output	V_{OH}	I_{out} = 100µA, 3.3MHz	0.9×V_{DDIO}	-	V_{DDIO}	V
Low Level Output	V_{OL}	I_{out} = 100µA, 3.3MHz	0	-	0.1×V_{DDIO}	V
Operating Current for V_{CI}	I_{CI}		-	240	300	µA
Operating Current for V_{CC}	I_{CC}	Note 4	-	16.1	20.1	mA
		Note 5	-	27.0	33.8	mA
Sleep Mode Current for V_{CI}	$I_{CI, SLEEP}$	-		1	5	µA
Sleep Mode Current for V_{CC}	$I_{CC, SLEEP}$	-		1	5	µA

Note 3: Brightness (L_{br}) and Supply Voltage for Display (V_{CC}) are subject to the change of the panel characteristics and the customer's request.
Note 4: V_{CI} = 2.8V, V_{CC} = 12V, 50% Display Area Turn on.
Note 5: V_{CI} = 2.8V, V_{CC} = 12V, 100% Display Area Turn on.

* Software configuration follows Section 4.4 Initialization.


3.3 AC Characteristics

3.3.1 68XX-Series MPU Parallel Interface Timing Characteristics:

Symbol	Description	Min	Max	Unit
t_{cycle}	Clock Cycle Time	300	-	ns
t_{AS}	Address Setup Time	10	-	ns
t_{AH}	Address Hold Time	0	-	ns
t_{DSW}	Write Data Setup Time	40	-	ns
t_{DHW}	Write Data Hold Time	7	-	ns
t_{DHR}	Read Data Hold Time	20	-	ns
t_{OH}	Output Disable Time	-	70	ns
t_{ACC}	Access Time	-	140	ns
PW_{CSL}	Chip Select Low Pulse Width (Read)	120	-	ns
	Chip Select Low Pulse Width (Write)	60		
PW_{CSH}	Chip Select High Pulse Width (Read)	60	-	ns
	Chip Select High Pulse Width (Write)	60		
t_R	Rise Time	-	15	ns
t_F	Fall Time	-	15	ns

* (V_{DD} - V_{SS} = 2.4V to 2.6V, V_{DDIO} = 1.65V, V_{CI} = 2.8V, T_a = 25°C)

CONFIDENTIAL
Next Vision Display

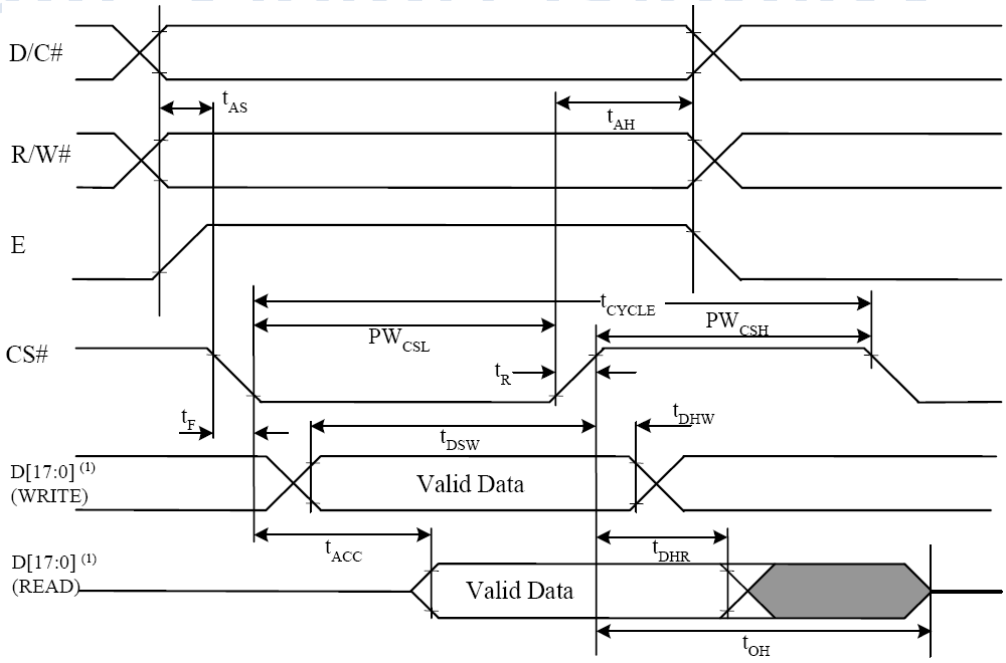


* (1) When 8-bit Used: D[7:0] Instead

3.3.2 80XX-Series MPU Parallel Interface Timing Characteristics:

Symbol	Description	Min	Max	Unit
t_{cycle}	Clock Cycle Time	300	-	ns
t_{AS}	Address Setup Time	10	-	ns
t_{AH}	Address Hold Time	0	-	ns
t_{DSW}	Write Data Setup Time	40	-	ns
t_{DHW}	Write Data Hold Time	7	-	ns
t_{DHR}	Read Data Hold Time	20	-	ns
t_{OH}	Output Disable Time	-	70	ns
t_{ACC}	Access Time	-	140	ns
t_{PWLR}	Read Low Time	150	-	ns
t_{PWLW}	Write Low Time	60	-	ns
t_{PWHR}	Read High Time	60	-	ns
t_{PWHW}	Write High Time	60	-	ns
t_{CS}	Chip Select Setup Time	0	-	ns
t_{CSH}	Chip Select Hold Time to Read Signal	0	-	ns
t_{CSF}	Chip Select Hold Time	20	-	ns
t_R	Rise Time	-	15	ns
t_F	Fall Time	-	15	ns

CONFIDENTIAL
Next Vision Display

* (V_{DD} - V_{SS} = 2.4V to 2.6V, V_{DDIO} = 1.65V, V_{CI} = 2.8V, T_a = 25°C)

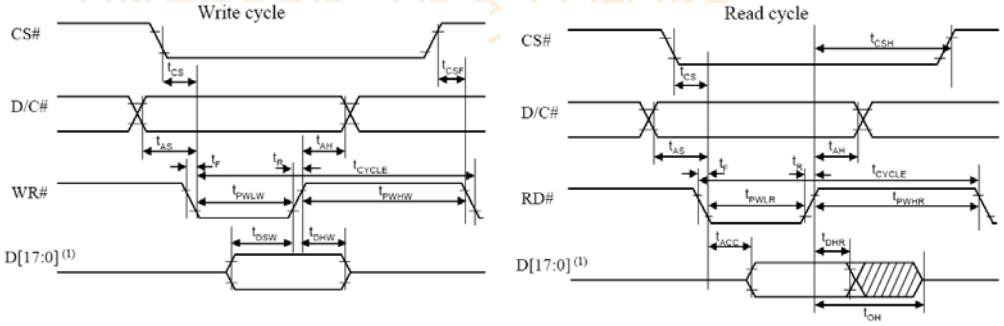


* (1) When 8-bit Used: D[7:0] Instead


3.3.3 Serial Interface Timing Characteristics: (4-wire SPI)

Symbol	Description	Min	Max	Unit
t_{cycle}	Clock Cycle Time	50	-	ns
t_{AS}	Address Setup Time	15	-	ns
t_{AH}	Address Hold Time	15	-	ns
t_{CSS}	Chip Select Setup Time	20	-	ns
t_{CSH}	Chip Select Hold Time	10	-	ns
t_{DSW}	Write Data Setup Time	15	-	ns
t_{DHW}	Write Data Hold Time	15	-	ns
t_{CLKL}	Clock Low Time	20	-	ns
t_{CLKH}	Clock High Time	20	-	ns
t_R	Rise Time	-	15	ns
t_F	Fall Time	-	15	ns

* (V_{DD} - V_{SS} = 2.4V to 2.6V, V_{DDIO} = 1.65V, V_{CI} = 2.8V, T_a = 25°C)

CONFIDENTIAL

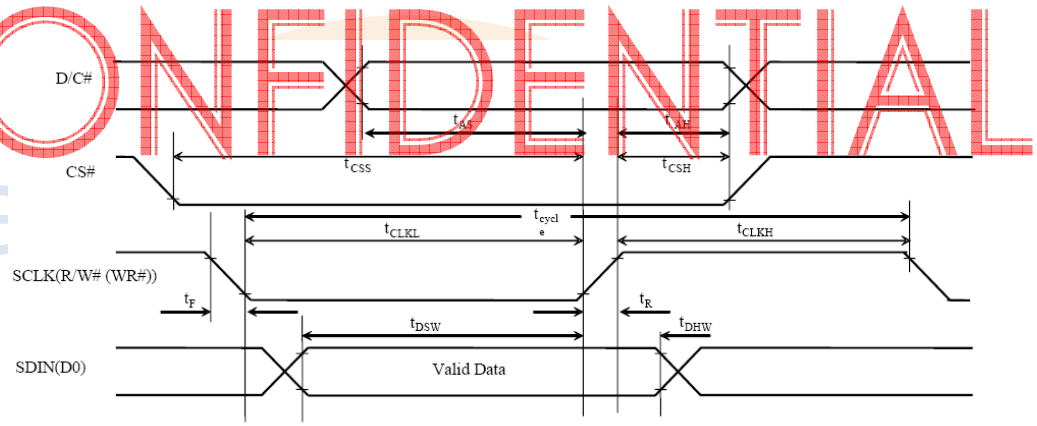


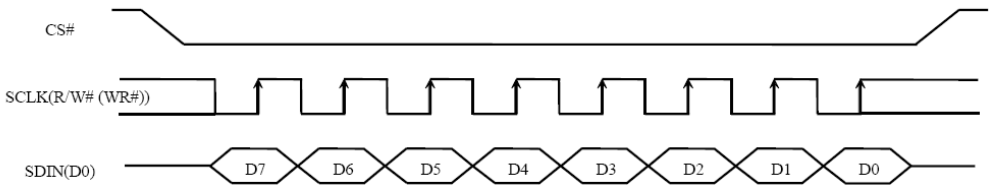

3.3.4 Serial Interface Timing Characteristics: (3-wire SPI)

Symbol	Description	Min	Max	Unit
t_{cycle}	Clock Cycle Time	50	-	ns
t_{CSS}	Chip Select Setup Time	20	-	ns
t_{CSH}	Chip Select Hold Time	10	-	ns
t_{DSW}	Write Data Setup Time	15	-	ns
t_{DHW}	Write Data Hold Time	15	-	ns
t_{CLKL}	Clock Low Time	20	-	ns
t_{CLKH}	Clock High Time	20	-	ns
t_R	Rise Time	-	15	ns
t_F	Fall Time	-	15	ns

* (V_{DD} - V_{SS} = 2.4V to 2.6V, V_{DDIO} = 1.65V, V_{CI} = 2.8V, T_a = 25°C)

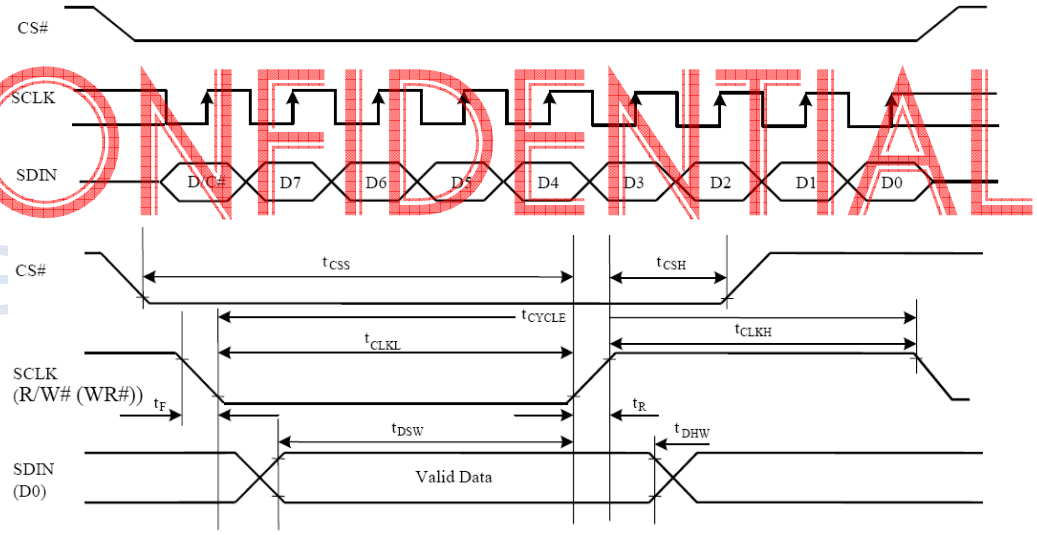

CONFIDENTIAL

4. Functional Specification

4.1. Commands


Refer to the Technical Manual for the SSD1351

4.2 Power down and Power up Sequence

To protect OEL panel and extend the panel life time, the driver IC power up/down routine should include a delay period between high voltage and low voltage power sources during turn on/off. It gives the OEL panel enough time to complete the action of charge and discharge before/after the operation.


4.2.1 Power up Sequence:

1. Power up V_{CI} & V_{DDIO}
2. Send Display off command
3. Initialization
4. Clear Screen
5. Power up V_{CC}
6. Delay 100ms
   (when V_{CC} is stable)
7. Send Display on command

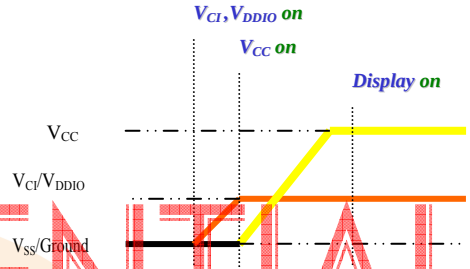

4.2.2 Power down Sequence:

1. Send Display off command
2. Power down V_{CC}
3. Delay 100ms
   (when V_{CC} is reach 0 and panel is completely discharges)
4. Power down V_{CI} & V_{DDIO}

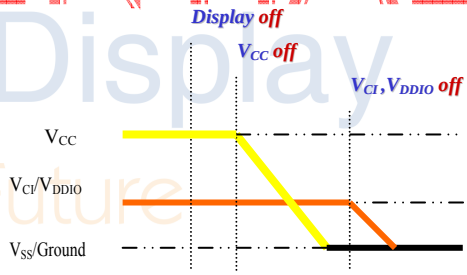

CONFIDENTIAL
Next Vision Display
Display The Future

4.3 Reset Circuit


When RES# input is low, the chip is initialized with the following status:

1. Display is OFF
2. 128(RGB) ×128 Display Mode
3. Normal segment and display data column and row address mapping (SEG0 mapped to column address 00h and COM0 mapped to row address 00h)
4. Display start line is set at display RAM address 0
5. Column address counter is set at 0
6. Normal scan direction of the COM outputs
7. Command A2h, B1h, B3h, BBh, BEh are locked by command FDh

4.4 Actual Application Example

Command usage and explanation of an actual example

<Initialization>

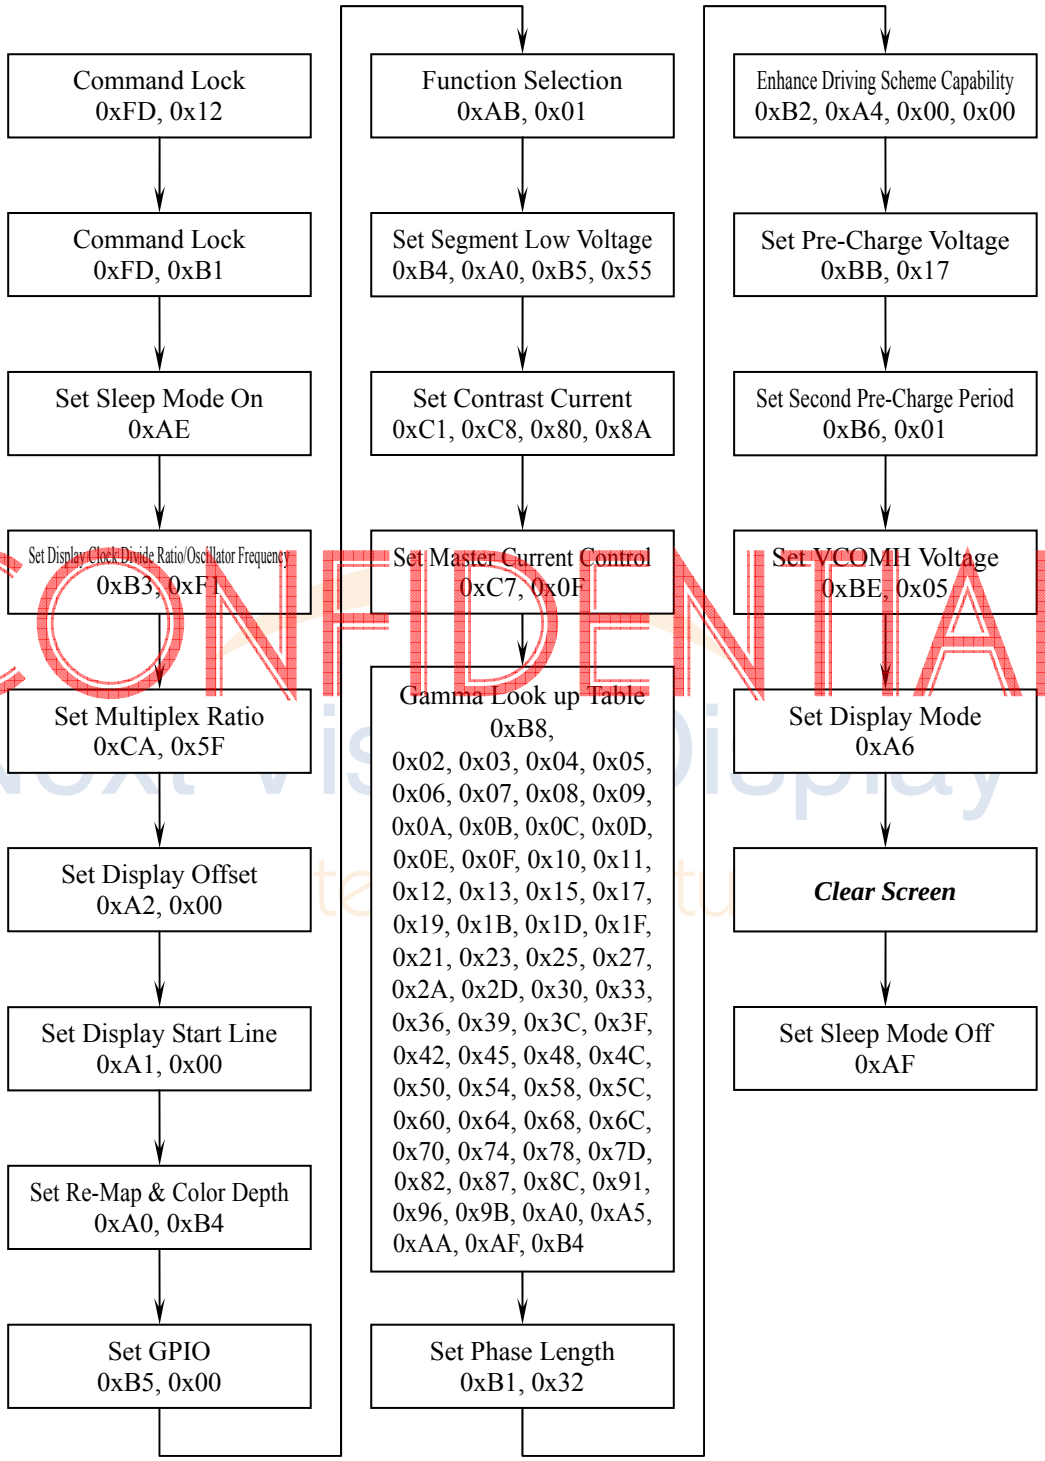

CONFIDENTIAL

If the noise is accid entally occurred at the displaying window during the operation, please reset the display in order to recover the display function.

5. *Reliability*

5.1 Contents of Reliability Tests

Item Conditions		Criteria
High Temperature Operation	70°C, 240 hrs	The operational functions work.
Low Temperature Operation	-30°C, 240 hrs	
High Temperature Storage	80°C, 240 hrs	
Low Temperature Storage	-40°C, 240 hrs	
High Temperature/Humidity Operation	60°C, 90% RH, 120 hrs	
Thermal Shock	-40°C ⇔ 85°C, 24 cycles 60 mins dwell	

* The samples used for the above tests do not include polarizer.
* No moisture condensation is observed during tests.

5.2 Lifetime

End of lifetime is specified as 50% of initial brightness.

Parameter	Min	Max	Unit	Condition	Notes
Operating Life Time	10,000	-	hr	100 cd/m^2, 50% Checkerboard	6
Storage Life Time	20,000	-	hr	T_a = 25°C, 50% RH	-

Note 6: The average operating lifetime at room temperature is estimated by the accelerated operation at high temperature conditions.

CONFIDENTIAL
Next Vision Display
Brighten The Future

5.3 Failure Check Standard

After the completion of the described reliability test, the samples were left at room temperature for 2 hrs prior to conducting the failure test at 23±5°C; 55±15% RH.

6. *Outgoing Quality Control Specifications*

6.1 Environment Required

Customer's test & m easurement are requi red to be conducted under the following conditions:

Temperature: 23	± 5°C
Humidity: 55	± 15 %RH
Fluorescent Lamp:	30W
Distance between the Panel & Lamp:	≥ 50 cm
Distance between the Panel & Eyes of the Inspector:	≥ 30 cm

Finger glove (or finger cover) must be worn by the inspector.
Inspection table or jig must be anti-electrostatic.

6.2 Sampling Plan

Level II, Normal Inspection, Single Sampling, MIL-STD-105E


6.3 Criteria & Acceptable Quality Level

CONFIDENTIAL
Next Vision Display





Partition	AQL	Definition
Major	0.65	Defects in Pattern Check (Display On)
Minor	1.0	Defects in Cosmetic Check (Display Off)

6.3.1 Cosmetic Check (Display Off) in Non-Active Area

Brighten The Future



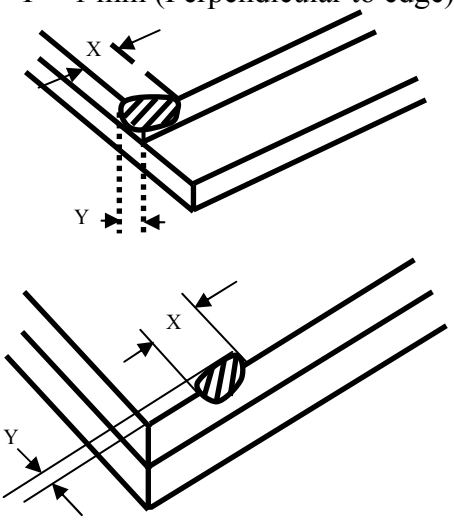
Check Item	Classification	Criteria
Panel General Chipping	Minor	X > 6 mm (Along with Edge) Y > 1 mm (Perpendicular to edge) 

6.3.1 Cosmetic Check (Display Off) in Non-Active Area (Continued)

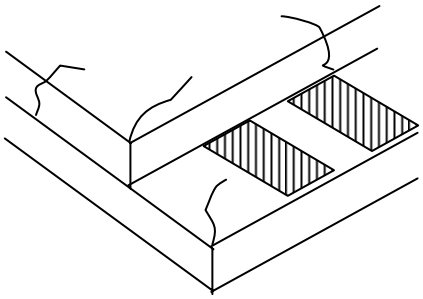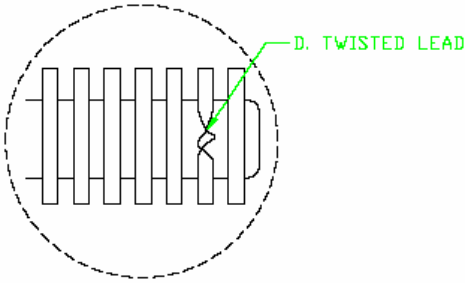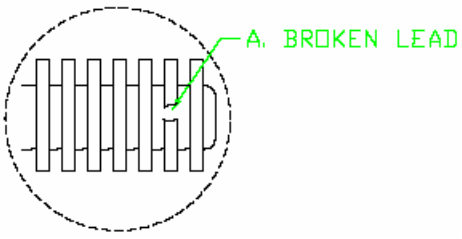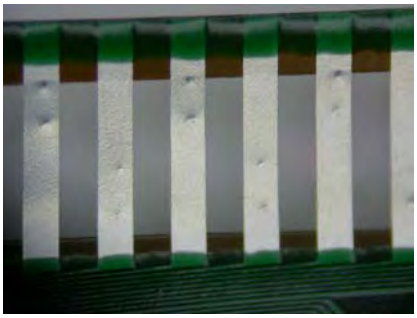Check Item	Classification	Criteria
Panel Crack	Minor	Any crack is not allowable. 
Cupper Exposed (Even Pin or Film)	Minor	Not Allowable by Naked Eye Inspection
Film or Trace Damage	Minor	
Terminal Lead Twist	Minor	Not Allowable 
Terminal Lead Broken	Minor	Not Allowable 
Terminal Lead Prober Mark	Acceptable	

CONFIDENTIAL
Next Vision
Brighten The


6.3.1 Cosmetic Check (Display Off) in Non-Active Area (Continued)

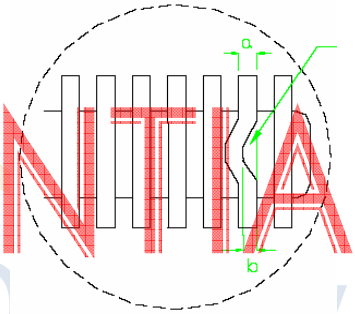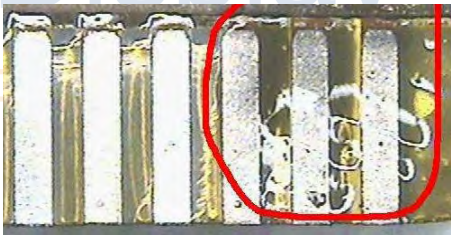Check Item	Classification	Criteria
Terminal Lead Bent (Not Twist or Broken)	Minor	NG if any bent lead cause lead shorting. 
	Minor	NG for horizontally bent lead more than 50% of its width. 
Glue or Contamination on Pin (Couldn't Be Removed by Alcohol)	Minor	
Ink Marking on Back Side of panel (Exclude on Film)	Acceptable	Ignore for Any

CONFIDENTIAL
Next Vision Display
Brighten The Future

6.3.2 Cosmetic Check (Display Off) in Active Area


It is recommended to execute in clear room environment (class 10k) if actual in necessary.

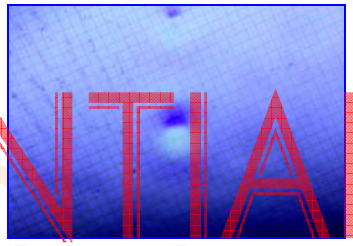
Check Item	Classification	Criteria
Any Dirt & Scratch on Protective Film	Acceptable	Ignore for Any
Scratches, Fiber, Line-Shape Defect (On Polarizer)	Minor	W ≤ 0.1 Ignore W > 0.1, L ≤ 2 n ≤ 1 L > 2 n = 0
Dirt, Spot-Shape Defect (On Polarizer)	Minor	Φ ≤ 0.1 Ignore 0.1 <Φ ≤ 0.25 n ≤ 1 0.25 <Φ n = 0
Dent, Bubbles, White spot (Any Transparent Spot on Polarizer)	Minor	Φ ≤ 0.5 ➔ Ignore if no Influence on Display 0.5 < Φ n = 0 
Fingerprint, Flow Mark (On Polarizer)	Minor Not	allowable

CONFIDENTIAL
Next Vision Display
Brighten The Future







* Protective film should not be tear off when cosmetic check.

** Definition of W & L & Φ (Unit: mm): Φ = (a + b) / 2



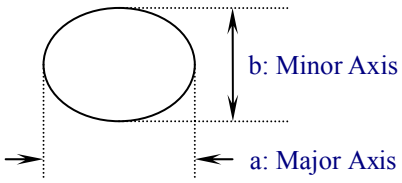


6.3.3 Pattern Check (Display On) in Active Area

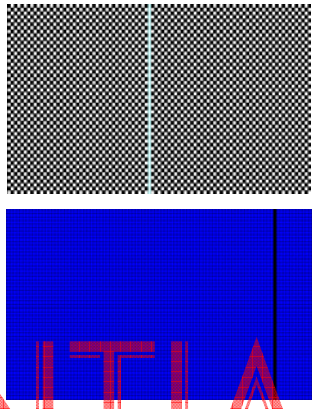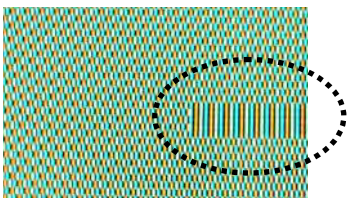Check Item	Classification	Criteria
No Display	Major	Not allowable
Bright Line	Major	
Missed Line	Major	
Pixel Short	Major	
Darker Pixel	Major	
Wrong Display	Major	
Un-Uniform (Luminance Variation within a Display)	Major	

CONFIDENTIAL
Next Vision Di
Brighten The Futu

7. Package Specifications

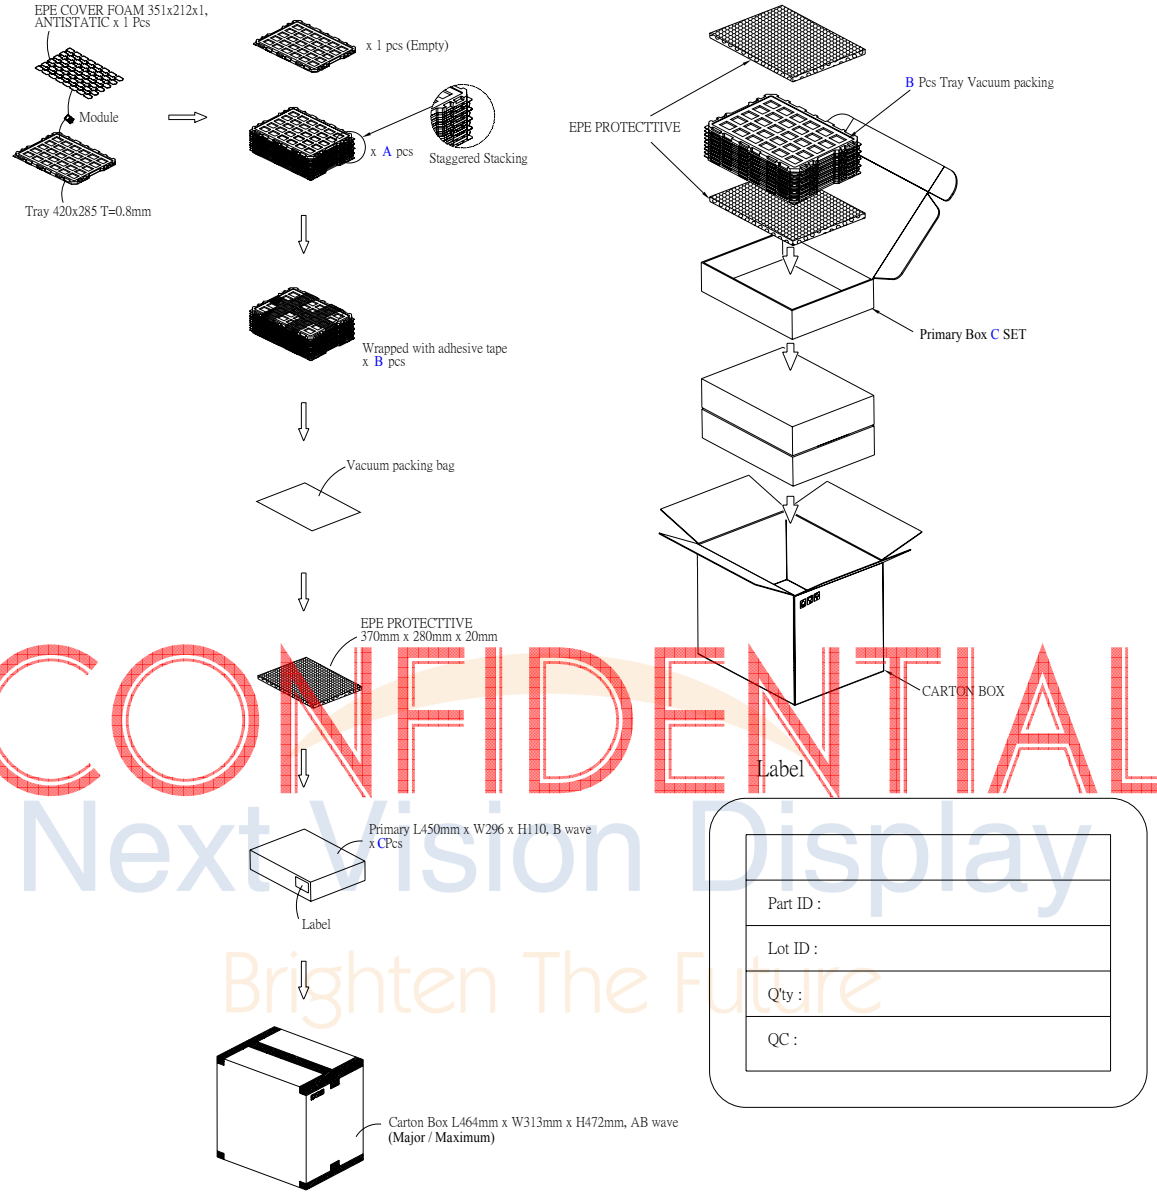

CONFIDENTIAL
Next Vision Display
Brighten The Future

Item Quantity			
Holding Trays	(A)	15	per Primary Box
Total Trays	(B)	16	per Primary Box (Including 1 Empty Tray)
Primary Box	(C)	1~4	per Carton (4 as Major / Maximum)


8. Precautions When Using These OEL Display Modules

8.1 Handling Precautions

1) Since the display panel is being made of glass, do not apply mechanical impacts such us dropping from a high position.
2) If the display panel is broken by some accident and th e internal o rganic substance leaks out, be careful not to inhale nor lick the organic substance.
3) If pressu re is applied to the d isplay surface o r its n eighborhood of the OEL display module, the cell structure m ay be damaged and be careful not to apply pressure to these sections.
4) The polarizer covering the surface of the OEL display module is soft and easily scratched. Please be careful when handling the OEL display module.
5) When the surface of the polarizer of the OEL display module has soil, clean the surface. It takes advantage of by using following adhesion tape.
   * Scotch Mending Tape No. 810 or an equivalent

   Never try to breathe upon the soiled surface nor wipe the surface using cloth containing solvent such as ethyl alcohol, since the surface of the polarizer will become cloudy.

   Also, pay attention that the following liquid and solvent may spoil the polarizer:
   * W ater
   * Ketone
   * Arom atic Solvents
6) Hold OEL display m odule very care fully when placing OEL display m odule into the system housing. Do not apply excessive stress or pressure to OEL display module. And, do not over bend the film with electrode pattern layouts. These stresses will inf luence the dis play performance. Also, secure s ufficient rigidity for the outer cases.

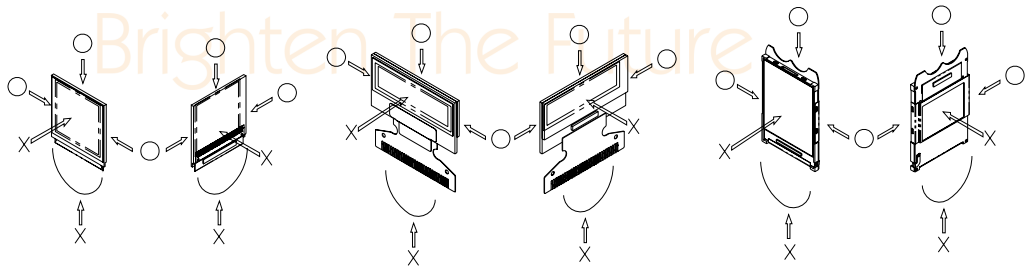

7) Do not apply stress to the LSI chips and the surrounding molded sections.
8) Do not disassemble nor modify the OEL display module.
9) Do not apply input signals while the logic power is off.
10) Pay suf ficient attention to the working environm ents when handing OEL display modules to prev ent occurrence of elem ent breakage acciden ts by static electricity.
    * Be sure to m ake hum an body gr ounding when handling OEL display modules.
    * Be sure to ground tools to use or assembly such as soldering irons.
    * To suppress generation of static electricity, avoid carrying out assembly work under dry environments.
    * Protective film is being applied to the surface of the display panel of the OEL display m odule. Be careful since stat ic elec tricity m ay be genera ted when exfoliating the protective film.
11) Protection film is being applied to the surface of the d isplay panel and removes

CONFIDENTIAL
Next Vision Display
Brighten The Future

the protection film before assembling it. At this time, if the OEL display module has been stored for a long period of time, residue adhesive material of the protection film may remain on the surface of the display panel after removed of the film. In such case, remove the residue material by the method introduced in the above Section 5).

12) If electric current is applied when the OEL display module is being dewed or when it is placed under high humidity environments, the electrodes may be corroded and be careful to avoid the above.

8.2 Storage Precautions

1) When storing OEL display modules, put them in static electricity preventive bags avoiding exposure to direct sun light nor to lights of fluorescent lamps, etc. and, also, avoiding high temperature and high humidity environments or low temperature (less than 0°C) environments. (We recommend you to store these modules in the packaged state when they were shipped from Univision Technology Inc.)
   At that time, be careful not to let water drops adhere to the packages or bags nor let dewing occur with them.
2) If electric current is applied when water drops are adhering to the surface of the OEL display module, when the OEL display module is being dewed or when it is placed under high humidity environments, the electrodes may be corroded and be careful about the above.

CONFIDENTIAL
Next Vision Display
Brighten the Future

8.3 Designing Precautions

1) The absolute maximum ratings are the ratings which can not be exceeded for OEL display module, and if these values are exceeded, panel damage may be happen.
2) To prevent occurrence of malfunctioning by noise, pay attention to satisfy the VIL and VIH specifications and, at the same time, to make the signal line cable as short as possible.
3) We recommend you to install excess current preventive unit (fuses, etc.) to the power circuit (VCI). (Recommend value: 0.5A)
4) Pay sufficient attention to avoid occurrence of mutual noise interference with the neighboring devices.
5) As for EMI, take necessary measures on the equipment side basically.
6) When fastening the OEL display module, fasten the external plastic housing section.
7) If power supply to the OEL display module is forcibly shut down by such errors as taking out the main battery while the OEL display panel is in operation, we cannot guarantee the quality of this OEL display module.
8) The electric potential to be connected to the rear face of the IC chip should be as follows: SSD1351
   * Connection (contact) to any other potential than the above may lead to rupture of the IC.

8.4 Precautions when disposing of the OEL display modules

1) Request the qualified companies to handl e industrial wastes when disposing of the OEL display m odules. Or, when burning them , be sure to observe the environmental and hygienic laws and regulations.

8.5 Other Precautions

1) When an OEL display module is operated for a long of tim e with fixed pattern may remain as an after image or slight contrast deviation may occur. Nonetheless, if the operation is interrupted and left unused for a while, normal state can be restored. Also, there will be no problem in the reliability of the module.
2) To protect OEL display m odules from performance drops by static electricity rapture, etc., do not touch the follow ing sections whenever possible while handling the OEL display modules.
   * Pins and electrodes
   * Pattern layouts such as the COF
3) With this OEL display module, the OE L driver is being exposed. Generally speaking, sem iconductor elem ents change their characteristics when light is radiated according to the principle of th e solar battery. Consequently, if this OEL driver is exposed to light, malfunctioning may occur.
   * Design the product and installation m ethod so that the OEL driver m ay be shielded from light in actual usage.
   * Design the product and installation m ethod so that the OEL driver m ay be shielded from light during the inspection processes.
4) Although this OEL display m odule stor es the operation state data by the commands and the indication data, when ex cessive extern al noise, etc. enters into the module, the internal status may be changed. It therefore is necessary to take appropriate m easures to suppre ss noise generation or to pro tect from influences of noise on the system design.
5) We recommend you to construct its soft ware to make periodical refreshment of the operation statuses (re-setting of th e comm ands and re-transference of the display data) to cope with catastrophic noise.

CONFIDENTIAL
Next Vision Display
Brighten the Future