Represented by:

FIRST Components s.r.l.
www.first-components.com
technical@first-components.com
+39 0332 1888005

WINSTAR Display

OLED SPECIFICATION

Model No:

WEO12864W#AHP3D00000-FC


General Specification


Item	Dimension	Unit
Dot Matrix	128 x 64	—
Module dimension	43.04 × 28.22 × 2.93	mm
Active Area	35.05 × 17.51	mm
Pixel Size	0.249 × 0.249	mm
Pixel Pitch	0.274 × 0.274	mm
Display Mode	Passive Matrix	
Display Color	Monochrome (White)	
Drive Duty	1/64 Duty	
OLED IC	SH1106	
OLED Interface	6800,8080,4-wire SPI,I2C	
Size	1.54 inch	

CTP IC	FT6336U
Detect Point	1
CTP Interface	I2C
Surface	Normal Glare


first components

Contour Drawing & Block Diagram

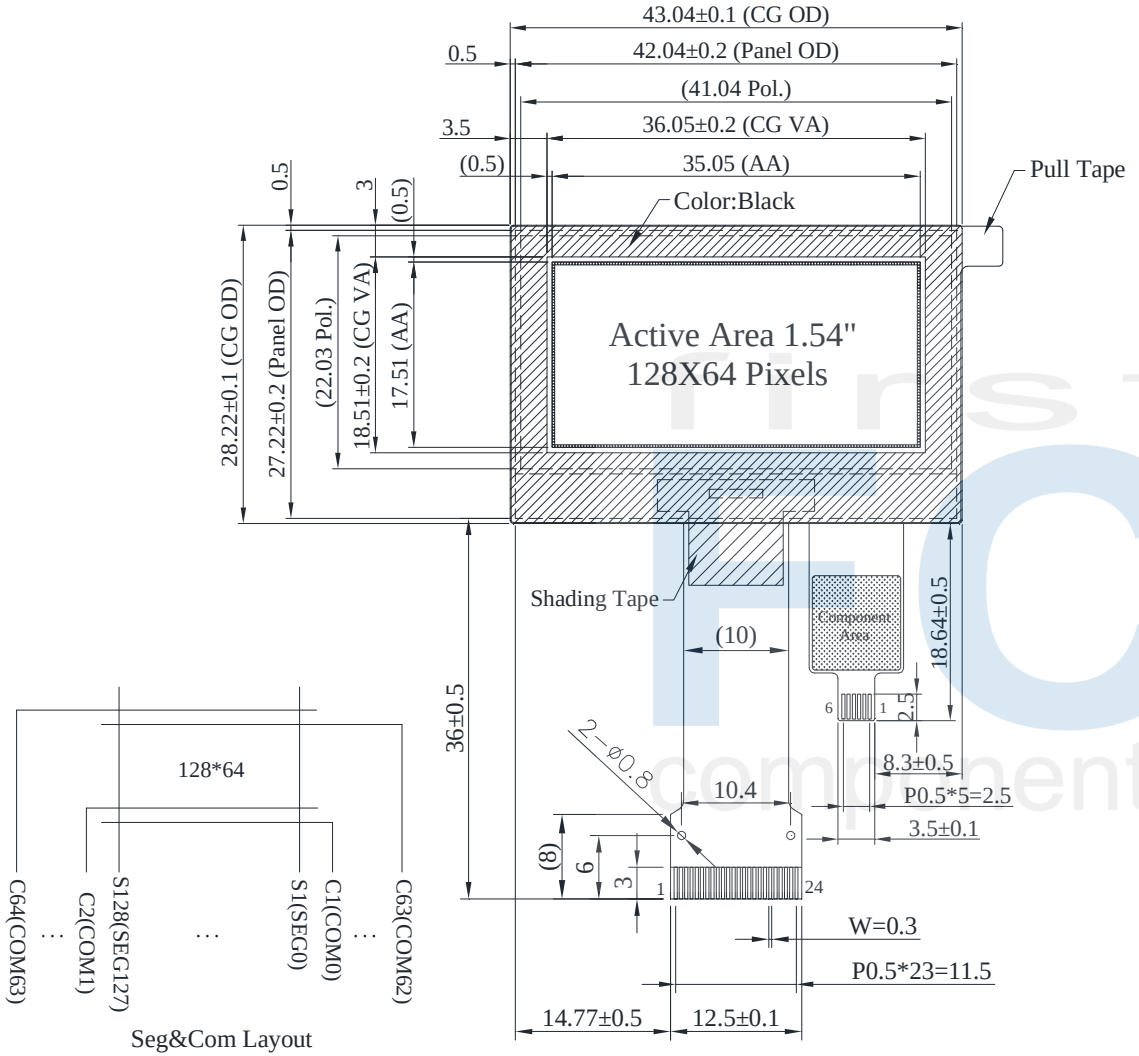

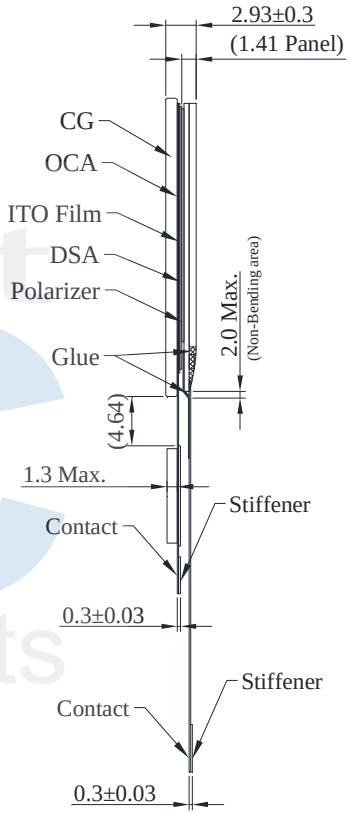

CTP		OLED	
NO.	SYMBOL	NO.	SYMBOL
1	GND	1	ESD_GND
2	VDD	2	VSS
3	RST	3	VSS
4	INT	4	NC
5	SCL	5	VDD1
6	SDA	6	IM1
		7	IM2
		8	$\overline{CS}$
		9	$\overline{RES}$
		10	A0
		11	$\overline{WR}$
		12	E/$\overline{RD}$
		13	D0
		14	D1
		15	D2
		16	D3
		17	D4
		18	D5
		19	D6
		20	D7
		21	IREF
		22	VCOMH
		23	VPP
		24	ESD_GND



Dots Size
Scale 10/1

The non-specified tolerance of dimension is ±0.3mm.

Interface Pin Function

<table>
<tr><th>No.</th><th>Symbol</th><th>Function</th></tr>
<tr><td>1</td><td>ESD_GND</td><td>ESD Ground pin</td></tr>
<tr><td>2</td><td>VSS</td><td>Ground.</td></tr>
<tr><td>3</td><td>VSS</td><td>Ground.</td></tr>
<tr><td>4</td><td>NC</td><td>No connection</td></tr>
<tr><td>5</td><td>VDD1</td><td>Power supply input</td></tr>
<tr><td>6</td><td>IM1</td><td rowspan="2">These are the MPU interface mode select pads.
<table>
<tr><td></td><td>8080</td><td>I2C</td><td>6800</td><td>4-wire SPI</td></tr>
<tr><td>IM1</td><td>1</td><td>1</td><td>0</td><td>0</td></tr>
<tr><td>IM2</td><td>1</td><td>0</td><td>1</td><td>0</td></tr>
</table>
Note
(1) 0 is connected to VSS
(2) 1 is connected to VDD1</td></tr>
<tr><td>7</td><td>IM2</td></tr>
<tr><td>8</td><td>$\overline{CS}$</td><td>This pad is the chip select input. When $\overline{CS}$ = “L”, then the chip select becomes active, and data/command I/O is enabled.</td></tr>
<tr><td>9</td><td>$\overline{RES}$</td><td>This is a reset signal input pad. When $\overline{RES}$ is set to “L”, the settings are initialized. The reset operation is performed by the $\overline{RES}$ signal level.</td></tr>
<tr><td>10</td><td>A0</td><td>This is the Data/Command control pad that determines whether the data bits are data or a command.
A0 = “H”: the inputs at D0 to D7 are treated as display data.
A0 = “L”: the inputs at D0 to D7 are transferred to the command registers.
In I2C interface, this pad serves as SA0 to distinguish the different address of OLED driver.</td></tr>
<tr><td>11</td><td>$\overline{WR}$
(R/$\overline{W}$)</td><td>This is a MPU interface input pad.
When connected to an 8080 MPU, this is active LOW. This pad connects to the 8080 MPU $\overline{WR}$ signal. The signals on the data bus are latched at the rising edge of the $\overline{WR}$ signal.
When connected to a 6800 Series MPU: This is the read/write control signal input terminal.
When R/$\overline{W}$ = “H”: Read.
When R/$\overline{W}$ = “L”: Write.</td></tr>
<tr><td>12</td><td>E/$\overline{RD}$</td><td>This is a MPU interface input pad.
When connected to an 8080 series MPU, it is active LOW. This pad is connected to the $\overline{RD}$ signal of the 8080 series MPU, and the data bus is in an output status when this signal is “L”.
When connected to a 6800 series MPU, this is active HIGH. This is used as an enable clock input of the 6800 series MPU.
When $\overline{RD}$ = “H”: Enable.
When $\overline{RD}$ = “L”: Disable.</td></tr>
</table>

13-20	D0~D7	This is an 8-bit bi-directional data bus that connects to an 8-bit or 16-bit standard MPU data bus. When the serial interface is selected, then D0 serves as the serial clock input pad (SCL) and D1 serves as the serial data input pad (SI). At this time, D2 to D7 are set to high impedance. When the I2C interface is selected, then D0 serves as the serial clock input pad (SCL) and D1 serves as the serial data input pad (SDAI). At this time, D2 to D7 are set to high impedance.
21	IREF	This is a segment current reference pad. A resistor should be connected between this pad and VSS. Set the current at 18.75uA.
22	VCOMH	This is a pad for the voltage output high level for common signals. A capacitor should be connected between this pad and VSS.
23	VPP	OLED panel power supply. Generated by internal charge pump. Connect to capacitor. It could be supplied externally.
24	ESD_GND	ESD Ground pin

CTP Pin Function

1	**GND**	Ground.
2	**VDD**	Power Supply Voltage of CTP
3	**RST**	External Reset, Low is active
4	**INT**	External interrupt to the host
5	**SCL**	I2C clock input
6	**SDA**	I2C data input and output

first components

Absolute Maximum Ratings

Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Unit	Notes
Supply Voltage for Logic	VDD1	-0.3	3.6	V	1, 2
Supply Voltage for Display	VPP	-0.3	14.5	V	1, 2
Operating Temperature	TOP	-10	+60	°C	—
Storage Temperature	TSTG	-20	+70	°C	—

Note ：

1. All the above voltages are on the basis of “VSS = 0V”.
2. When this module is used beyond the above absolute maximum ratings, permanent breakage of the module may occur. Also, for normal operations, it is desirable to use this module under the conditions according to Section 6 ‘’Electrical Characteristics’’. If this module is used beyond these conditions, malfunctioning of the module can occur and the reliability of the module may deteriorate.
3. The absolute limit temperature was verified according to the test conditions of reliability test (See section 9. Reliability) , and module was met all criteria.

Touch Panel Controller FT6336U

Parameter	Symbol	Min	Max	Unit	Notes
Power Supply Voltage	VDD	0	3.6	V	1

Note 1: If used beyond the absolute maximum ratings, CTP IC may be permanently damaged. It is strongly recommended that the device be used within the electrical characteristics in normal operations. If exposed to the condition not within the electrical characteristics, it may affect the reliability of the device.

Electrical Characteristics

DC Electrical Characteristics

Item	Symbol	Condition	Min	Typ	Max	Unit
Supply Voltage for Logic	VDD1	—	1.65	3.0	3.3	V
Supply Voltage for Display	VPP	—	6.4	12.5	13.0	V
High Level Input	VIH	—	0.8×VDD1	—	VDD1	V
Low Level Input	VIL	—	VSS	—	0.2×VDD1	V
High Level Output	VOH	—	0.8×VDD1	—	VDD1	V
Low Level Output	VOL	—	VSS	—	0.2×VDD1	V
Display 50% Pixel on	IPP	VPP =12.5V	—	13	20	mA

Note: The VCC (VPP) value can be adjusted according to the demand brightness. When VCC (VPP) is lowered, the brightness decreases or when VCC (VPP) is increased, the brightness increases. The VCC (VPP) value is set within the recommended range. The life time of OLED is directly related to the set brightness, and lower brightness helps to improve the life time.

Touch Panel Controller FT6336U

Item	Symbol	Condition	Min	Typ	Max	Unit
Supply Voltage	VDD	—	2.8	3.0	3.3	V
Input High Volt.	VIH	—	0.7×VDD	—	VDD	V
Input Low Volt.	VIL	—	-0.3	—	0.3×VDD	V
Output High Volt.	VOH	—	0.7×VDD	—	—	V
Output Low Volt.	VOL	—	—	—	0.3×VDD	V