
# Female Header

pitch 1.27mm (0.05") I Single row I Dip

CSEA113 Series

## Specifications

| | |
|---|---|
| Current Rating : | 1.0 Ampere |
| Insulation Resistance : | 1000 MΩ Min |
| Dielectric Withstanding : | 300V AC |
| Contact Resistance : | 20 mΩ Max |
| Operating Temperature : | -40˚C to +105˚C |

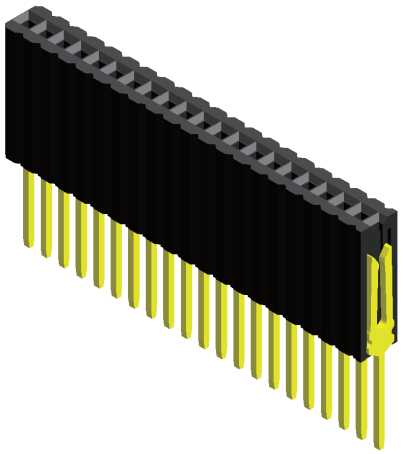


## Materials


| | |
|---|---|
| Contact Material : | Phosphor Bronze |
| Insulation Material : | High Temperature Thermoplastic, 94V-0 LCP |


All materials must meet Greenconn's requirements for environmental protection.


## Mating with




P.S. : Suggested mating pin length : 3.5 ~ 6.4 mm

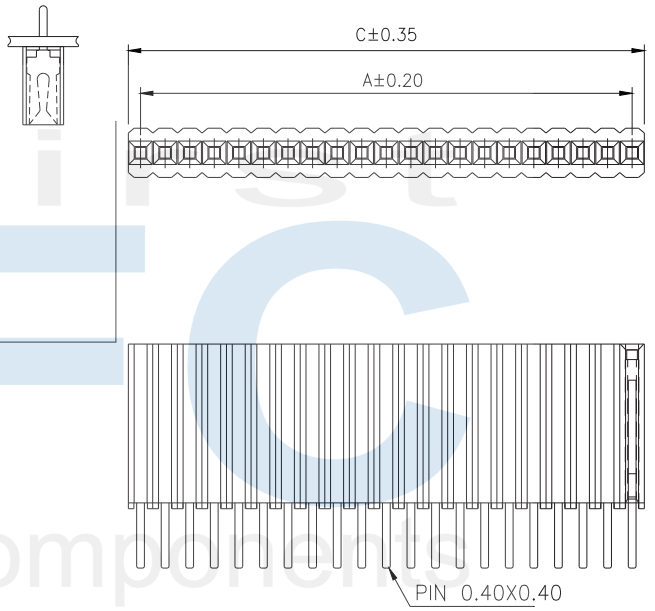


* For Coded Dimension Not Inside The Table, Please Refer To"Ordering Information"

| No. of Pins/Row | Dimension Information A | C | | No. of Pins/Row | Dimension Information A | C | | No. of Pins/Row | Dimension Information A | C | | No. of Pins/Row | Dimension Information A | C | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | 11 | 12.70 | 13.97 | | 21 | 25.40 | 26.67 | | 31 | 38.10 | 39.37 | |
| 02 | 1.27 | 2.54 | | 12 | 13.97 | 15.24 | | 22 | 26.67 | 27.94 | | 32 | 39.37 | 40.64 | |
| 03 | 2.54 | 3.81 | | 13 | 15.24 | 16.51 | | 23 | 27.94 | 29.21 | | 33 | 40.64 | 41.91 | |
| 04 | 3.81 | 5.08 | | 14 | 16.51 | 17.78 | | 24 | 29.21 | 30.48 | | 34 | 41.91 | 43.18 | |
| 05 | 5.08 | 6.35 | | 15 | 17.78 | 19.05 | | 25 | 30.48 | 31.75 | | 35 | 43.18 | 44.45 | |
| 06 | 6.35 | 7.62 | | 16 | 19.05 | 20.32 | | 26 | 31.75 | 33.02 | | | | | |
| 07 | 7.62 | 8.89 | | 17 | 20.32 | 21.59 | | 27 | 33.02 | 34.29 | | | | | |
| 08 | 8.89 | 10.16 | | 18 | 21.59 | 22.86 | | 28 | 34.29 | 35.56 | | | | | |
| 09 | 10.16 | 11.43 | | 19 | 22.86 | 24.13 | | 29 | 35.56 | 36.83 | | | | | |
| 10 | 11.43 | 12.70 | | 20 | 24.13 | 25.40 | | 30 | 36.83 | 38.10 | | | | | |

## Ordering Information

Stardand Packaging : Tube

CSEA1 [XX] - [XX] [XX] [X] [XXX] C1AC

**Height Option (H) Standard**
- 13

**No. of Pins per Row**
- 02
- ≀
- 35

**Standard Plating**
- 02 : Gold Flash

**Selective Plating**
- 01 : Tin
- 05 : Gold Flash / Tin

**Pin Length (B)**
- A
- 001 : B=3.00
- 002 : B=2.70

For special length requirement
Please contact our sales personnel



Due to technical progress, all designs, specifications and components are subject to change without notice.