華凌光電股份有限公司
WINSTAR WINSTAR Display Co., Ltd.

Represented by:

FIRST Components s.r.l.
www.first-components.com
technical@first-components.com
+39 0332 1888005

SMART DISPLAY SPECIFICATION



Think good, Do good, Be good !

華凌光電股份有限公司
WINSTAR WINSTAR Display Co., Ltd.

SPECIFICATION

CUSTOMER	WINSTAR
MODEL NO.	WL0F0007000A8NAAFSA00-FC
CURRENT VERSION	0
RELEASE DATE	2026/02/13

SALES BY	APPROVED BY	CHECKED BY	PREPARED BY
first FC components	Ginger Xu	Leo Liu	Debby Hsu

APPROVED BY: **(FOR CUSTOMER USE ONLY)**	

first FC components


Product Information

General information

Item	Standard Value	Unit
Operating voltage	8V~35V dynamic	Vdc
Communication Interface	CAN bus	Vpp
MCU	STM32F746	N/A
Flash Memory	16	MB
LCD display size	7	inch
Dot Matrix	1024 x RGBx600(TFT)	dot
Module dimension	184.1(W) x 103.8(H) x 22(D)	mm
Active area	154.2144 x 85.92	mm
Dot pitch	0.1506 x 0.1432	mm
Brightness	Min:1000; Typ:1100	
LCD type	TFT, Normally Black, Transmissive	
View Direction	85/85/85/85	
Aspect Ratio	16:9	
With /Without TP	Without TP	
Surface	Glare	

first components

Contour Drawing

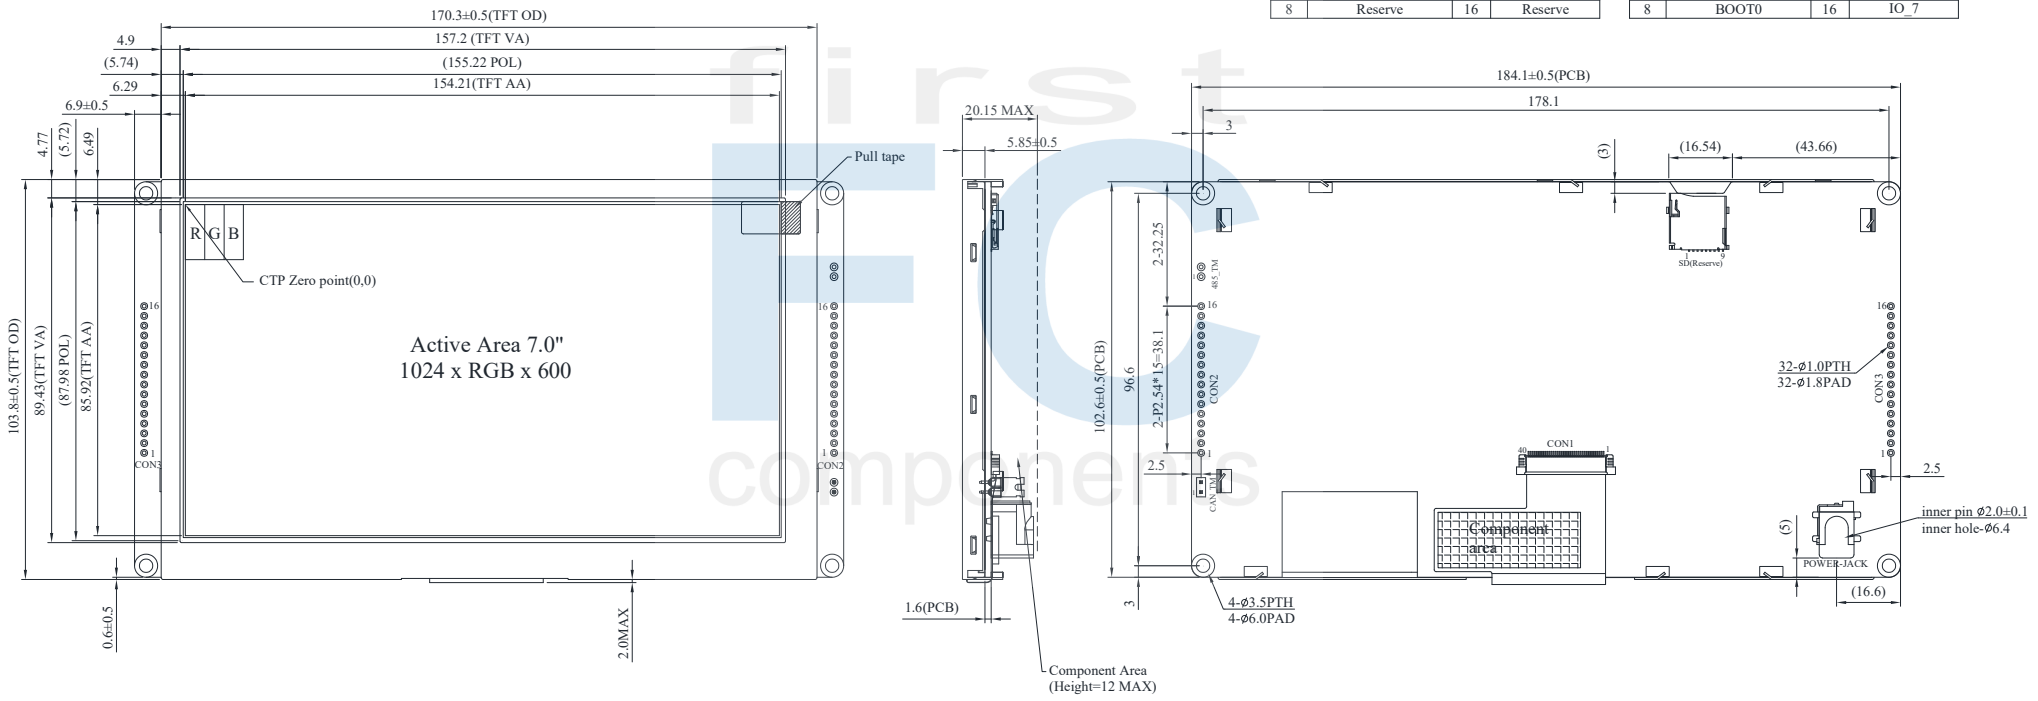

CON2			
PIN	SYMBOL	PIN	SYMBOL
1	VIN	9	Reserve
2	GND	10	Reserve
3	CAN_H	11	Reserve
4	CAN_L	12	Reserve
5	Reserve	13	Reserve
6	Reserve	14	Reserve
7	Reserve	15	Reserve
8	Reserve	16	Reserve

CON3			
PIN	SYMBOL	PIN	SYMBOL
1	+3V3	9	IO_0
2	SWCLK	10	IO_1
3	GND	11	IO_2
4	SWDIO	12	IO_3
5	NRST	13	IO_4
6	GND	14	IO_5
7	Wkup	15	IO_6
8	BOOT0	16	IO_7

The non-specified tolerance of dimension is ±0.3mm.

first components

Absolute Maximum Ratings

Item	Symbol	Min	Typ	Max	Unit
Operating Temperature	TOP	-20	—	+70	℃
Storage Temperature	TST	-30	—	+80	℃

Note: Device is subject to be damaged permanently if stresses beyond those absolute maximum ratings listed above

1. Temp. ≦60℃, 90% RH MAX. Temp.＞60℃, Absolute humidity shall be less than 90% RH at 60℃

Electrical Characteristics

Item	Symbol	Condition	Min	Typ	Max	Unit
Supply Voltage	VCC	—	8	12	35	V
Supply LCM current	I(mA)	-	-	660	-	mA

BOM

Item	Description	Remark
LCM	WF70-1024600A8L#0SP0-FC	
PCBA	SV10007R00A8K00N0114	

Interface

CON2 definition:

Pin	Symbol	Function	Remark
1	VIN	Power supply V+	Input
2	GND	Power supply GND input	Input
3	CAN_H	CAN bus High	I/O
4	CAN_L	CAN bus Low	I/O
5	Reserve	-	-
6	Reserve	-	-
7	Reserve	-	-
8	Reserve	-	-
9	Reserve	-	-
10	Reserve	-	-
11	Reserve	-	-
12	Reserve	-	-
13	Reserve	-	-
14	Reserve	-	-
15	Reserve	-	-
16	Reserve	-	-

first FC components

CON3 definition:

Pin	Symbol	Function	Remark
1	+3V3	3.3V power for JTAG interface	Output
2	SWCLK	CLK pin for JTAG interface	Input
3	GND	GND for JTAG interface	Output
4	SWDIO	Data pin for JTAG interface	I/O
5	NRST	Reset pin for JTAG interface	Input
6	GND	Power GND	Output
7	Wkup	WKup,ADC,Timer,Event,I/O	Input
8	BOOT0	Lo: Internal flash boot (Default) Hi: External flash boot	Input
9	IO_0	ADC,DAC,Timer,Event,I/O @3.3V	PA5
10	IO_1	ADC,Timer,Event,I/O @3.3V	PA6
11	IO_2	ADC,Timer,Event,I/O @3.3V	PA7
12	IO_3	ADC,Timer,Event,I/O @3.3V	PA8
13	IO_4	ADC,Timer,Event,I/O @3.3V	PC13
14	IO_5	ADC,Timer,Event,I/O @3.3V	PB11
15	IO_6	ADC,Timer,Event,I/O @3.3V	PA15
16	IO_7	RST,ADC,Event,I/O @3.3V	PD11

@3.3V : I/O allow below 3.3V input, If exceeding 3.3V may cause MCU damage.

first components