Represented by:
FIRST Components s.r.l.
www.first-components.com
technical@first-components.com
+39 0332 1888005

DMG10600F070_01WTC
DMG10600F070_01WTCZ01
DMG10600F070_01WTCZ02

First Components Technical Document

产品概述：

- 基于 T5L2 芯片，运行 DGUS II 系统。
- 7 英寸，1024*600 分辨率，16.7M 色，IPS 屏，宽视角电容触摸屏。
- 液晶屏与触摸屏全贴合工艺，结构可靠性高。
- 黑色、白色、一体黑触控面板，三色外观可选。
- COF 结构，将智能屏的整个核心电路固定于液晶模组 FPC 上，适合结构要求轻、薄，成本要求苛刻，生产简单的应用。
- 排线共 50 个 pin 脚，引出用户 CPU 核的 IO、UART、CAN、AD、PWM 等接口，二次开发十分方便。

Features:

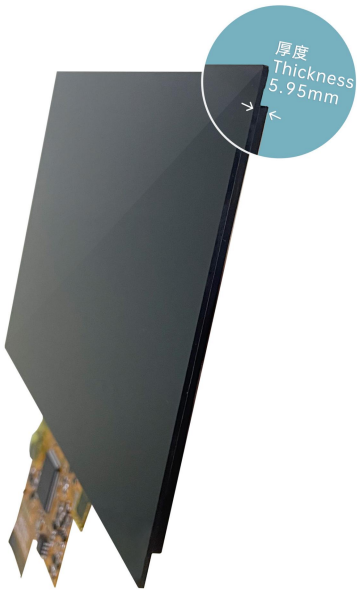
- Based on T5L2, running DGUS II system.
- 7 inch, 1024*600 pixels resolution, 16.7M colors, IPS-TFT-LCD, CTP with wide viewing angle .
- LCD and TP full lamination process, with high structural reliability.
- Optional TP appearance of black, white and integrated black.
- COF structure. The entire core circuit of the smart screen is fixed on the FPC of LCM, featured by light and thin structure, low cost and easy production.
- 50 pins, including IO, UART, CAN, AD and PWM from user CPU core for easy secondary development.



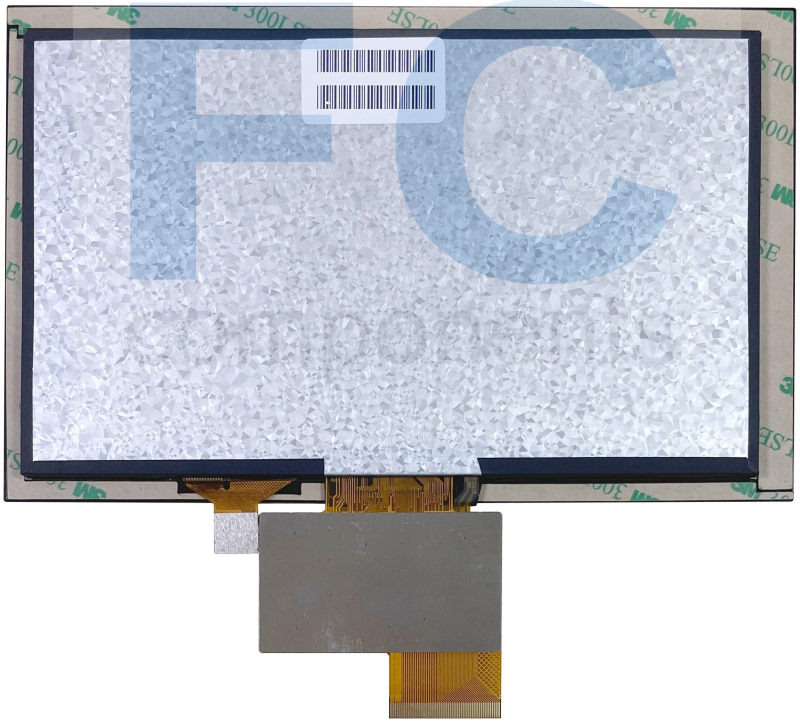
DMG10600F070_01WTC



DMG10600F070_01WTCZ01



DMG10600F070_01WTCZ02



1 外部接口 External Interface



PIN 序号	Definition 定义	I/O	Functional Description 功能描述
1	+5V	I	供电输入，DC3.6-5.5V。 Power supply, DC3.6-5.5V.
2	+5V	I	
3	GND	GND	GND
4	GND	GND	
5	GND	GND	
6	AD7	I	5 路 ADC 输入，3.3V 电源做为参考，12bit 分辨率，输入电压范围 0-3.3V。除 AD6 外，其余数据通过 UART3 实时发送给 OS 核，采样速度为 16KHz。AD1 和 AD5 并联，AD3 和 AD7 并联使用，可以等效成两路 32KHz 采样 AD。AD1、AD3、AD5、AD7 并联在一起使用，可以等效成一路 64KHz 采样 AD；对数据做 1024 次累加后再除以 64，过采样获得 1 路 64Hz 16bit 的 AD 值。 5 input ADCs. 12-bit resolution in case of 3.3V power supply. 0-3.3V input voltage. Except for AD6, the rest data is sent to OS core via UART3 in real time with 16KHz sampling rate. AD1 and AD5 can be used in parallel, and AD3 and AD7 can be used in parallel, which equals to two 32KHz sampling AD. AD1, AD3, AD5, AD7 can be used in parallel, which equals to a 64KHz sampling AD; the data is summed 1024 times and then divided by 64 to obtain a 64Hz 16bit AD value by oversampling.
7	AD6	I	
8	AD5	I	
9	AD3	I	
10	AD1	I	
11	+3.3	O	3.3V 输出，最大负载 150mA。 3.3V output, maximum load of 150mA.
12	SPK	O	外接 MOSFET 驱动蜂鸣器或扬声器，外部要 10K 下拉到 GND 确保上电是低电平。 External MOSFET to drive buzzer or speaker. The external 10K resistor should be pulled down to the ground to ensure that power-on is low level.
13	SD_CD	IO	SD/SDHC 接口，SD_CK 在靠近 SD 卡接口的地方对 GND 接一个 22pF 电容。 SD/SDHC interface,The SD_CK connects a 22pF capacitor to GND near the SD card interface.
14	SD_CK	O	
15	SD_D3	IO	
16	SD_D2	IO	
17	SD_D1	IO	
18	SD_D0	IO	

19	PWM0	O	2 路 16bit PWM 输出，外部要10K 下拉到GND 确保上电是低电平。 OS 核可以通过 UART3 来实时控制。 2 16-bit PWM output. The external 10K resistor should be pulled down to the ground to ensure that power-on is low level. The OS core can be controlled in real time via UART3.
20	PWM1	O	
21	P3.3	IO	如果使用RX8130 或SD2058 I2C RTC，连接在这两个IO 上。 SCL 接P3.2，SDA 接P3.3 并10K 上拉到3.3V。 If using RX8130 or SD2058 I2C RTC to connect to both IOs, SCL should be connected to P3.2,and SDA connected to P3.3 in parallel with 10K resistor pull-up to 3.3V.
22	P3.2	IO	
23	P3.1/EX1	IO	可同时作为外部中断 1 输入，支持低电平或下跳沿中断两种模式。 It can be used as an external interrupt 1 input at the same time, and supports both low voltage level or trailing edge interrupt modes.
24	P3.0/EX0	IO	可同时作为外部中断 0 输入，支持低电平或下跳沿中断两种模式。 It can be used as an external interrupt 0 input at the same time, and supports both low voltage level or trailing edge interrupt modes.
25	P2.7	IO	IO 口 IO interface
26	P2.6	IO	IO 口 IO interface
27	P2.5	IO	IO 口 IO interface
28	P2.4	IO	IO 口 IO interface
29	P2.3	IO	IO 口 IO interface
30	P2.2	IO	IO 口 IO interface
31	P2.1	IO	IO 口 IO interface
32	P2.0	IO	IO 口 IO interface
33	P1.7	IO	IO 口 IO interface
34	P1.6	IO	IO 口 IO interface
35	P1.5	IO	IO 口 IO interface
36	P1.4	IO	IO 口 IO interface
37	P1.3	IO	IO 口 IO interface
38	P1.2	IO	IO 口 IO interface
39	P1.1	IO	IO 口 IO interface
40	P1.0	IO	IO 口 IO interface
41	UART4_TXD	O	串口 4 UART4
42	UART4_RXD	I	
43	UART5_TXD	O	串口 5 UART5
44	UART5_RXD	I	
45	P0.0	IO	IO 口 IO interface
46	P0.1	IO	IO 口 IO interface
47	CAN_TX	O	CAN 接口 CAN interface
48	CAN_RX	I	
49	UART2_TXD	O	串口 2 UART2（OS 核的UART0 串口 UART0 serial port of OS core)
50	UART2_RXD	I	

FIRST Components Technical Document

2 规格参数 Specification Parameters

2.1 产品参数 Product Parameters

智能屏型号 Model	DMG10600F070_01WTC DMG10600F070_01WTCZ01 DMG10600F070_01WTCZ02
主控芯片 Main Chip	T5L2
用户接口方式 User Interface	50Pin_0.5mm FPC
FLASH	16M Bytes
供电方式 Power Supply	USB 供电 USB power supply
显示色彩 Display Color	16.7M 色 16.7M colors
尺寸 Dimensions	7 英寸 7 inch
分辨率 Resolution	1024*600
视域尺寸（V.A） View Area	154.21mm (W)×85.92mm (H)
可视角度 L/R/U/D Viewing Angle	宽视角，典型值 85°/85°/85°/85°（L/R/U/D） Wide viewing angel, typical value of 85°/85°/85°/85°(L/R/U/D)
背光寿命 Backlight Service Life	＞10000 小时（以最高亮度连续工作，亮度减半时间） ＞ 10000 hours (Time of the brightness decaying to 50% on the condition of continuous working with the maximum brightness)
亮度 Brightness	DMG10600F070_01WTC:250nit DMG10600F070_01WTCZ01:250nit DMG10600F070_01WTCZ02:50nit
背光调节 Brightness Control	100 级亮度调节（当亮度调节至最高亮度的 1%~30%时，可能出现闪烁现象，不建议在此范围使用） 0~100 grade (When the brightness is adjusted to 1%~30% of the maximum brightness, flickering may occur and is not recommended to use in this range)
触摸屏类型 Type	电容式触摸面板 CTP (Capacitive Touch Panel)
触摸屏结构 Structure	G+G 结构 G+G structure
触摸方式 Touch Mode	单点触摸，支持连续滑动触摸 Support point touch and drag
表面硬度 Surface Hardness	6H
透光率 Light Transmittance	85%以上 Over 85%
触控次数 Life	>1,000,000 次 Over 1,000,000 times touch

FIRST Components Technical Document

2.2 串口参数 Interface Parameters

参数 Item	测试条件 Conditions	最小值 Min	典型值 Typ	最大值 Max	单位 Unit
串口波特率 Baudrate	用户自定义（硬件配置文件设置） User Set(Configure the CFG file)	3150	115200	3225600	bps
串口输出电平 Output Voltage(TXD)	Output 1	3.0	3.3	-	V
	Output 0	-	0	0.3	V
串口输入电平 Input Voltage(RXD)	Input 1	-	-	3.3	V
	Input 0	0	-	0.5	V
串口模式 Interface	UART2: TTL; UART4: TTL;（OS 配置后才能使用 Only available after OS configuration） UART5: TTL;（OS 配置后才能使用 Only available after OS configuration）				
数据格式 Data Format	UART2: N81; UART4: N81/E81/O81/N82;四种模式可选（OS 配置）4 modes (OS configuration) UART5: N81/E81/O81/N82;四种模式可选（OS 配置）4 modes (OS configuration)				

2.3 电气规格 Electrical specifications

额定功率 Rated Power	<5W	
工作电压 Operating Voltage	3.6~5.5V，典型值 5V 3.6~5.5V, typical value of 5V	
工作电流 Operating Current	600mA	VCC=5V，背光亮度最大 VCC=5V, max backlight
	200mA	VCC=5V，背光关闭 VCC=5V, backlight off
推荐工作电源：5V 1A 的直流稳压电源 Recommended power supply: 5V 1A DC		

2.4 工作环境 Operating Environment

工作温度 Operating Temperature	-10℃~60℃
存储温度 Storage Temperature	-20℃~70℃
工作湿度 Operating Humidity	10%~90%RH，典型值 60%RH 10%~90%RH, typical value of 60% RH

First Components Technologies Technical Document

4 调试示例 Debug

建议首次使用迪文智能屏的用户购买测试套件。详细信息可联系客服人员。

It is recommended for new users of DWIN smart LCMs to purchase official accessories. For more details, please refer to customer service center.

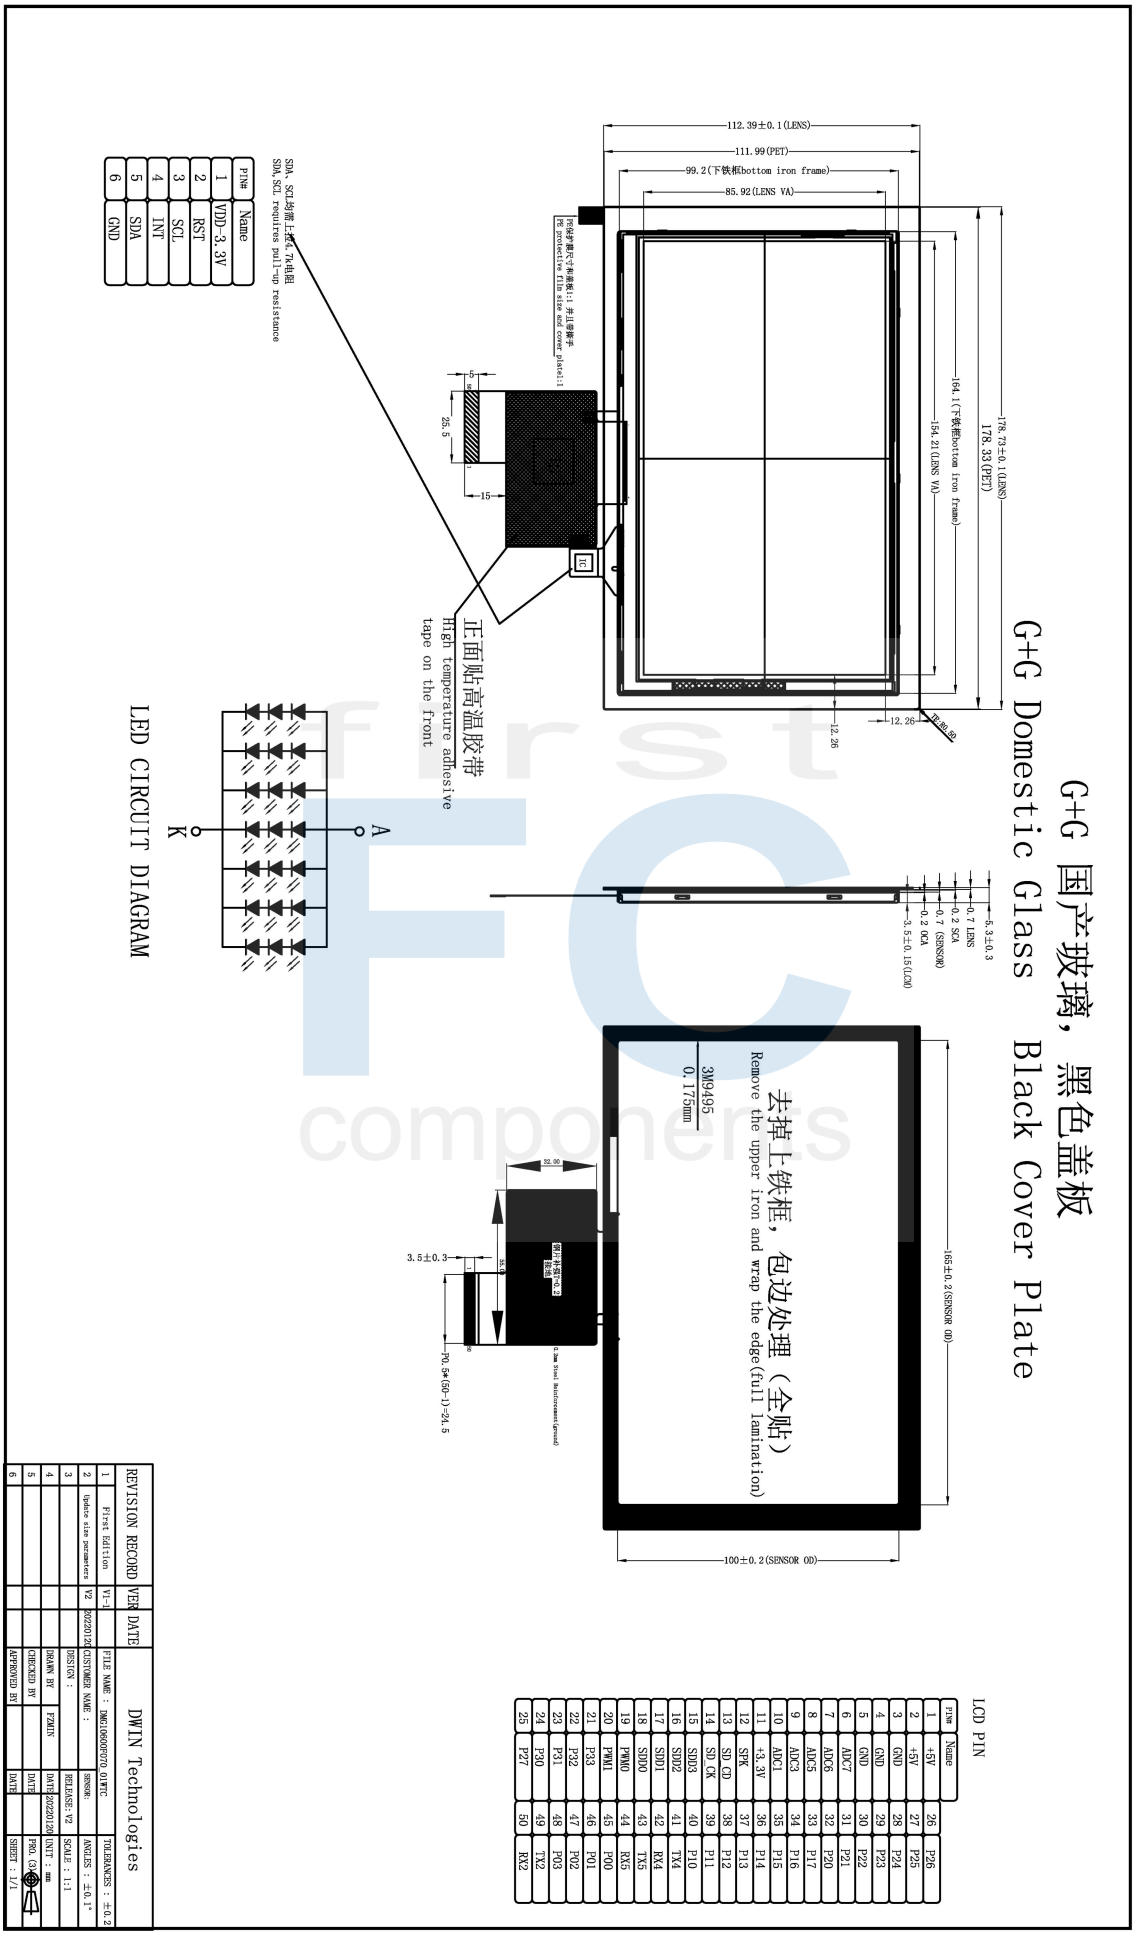


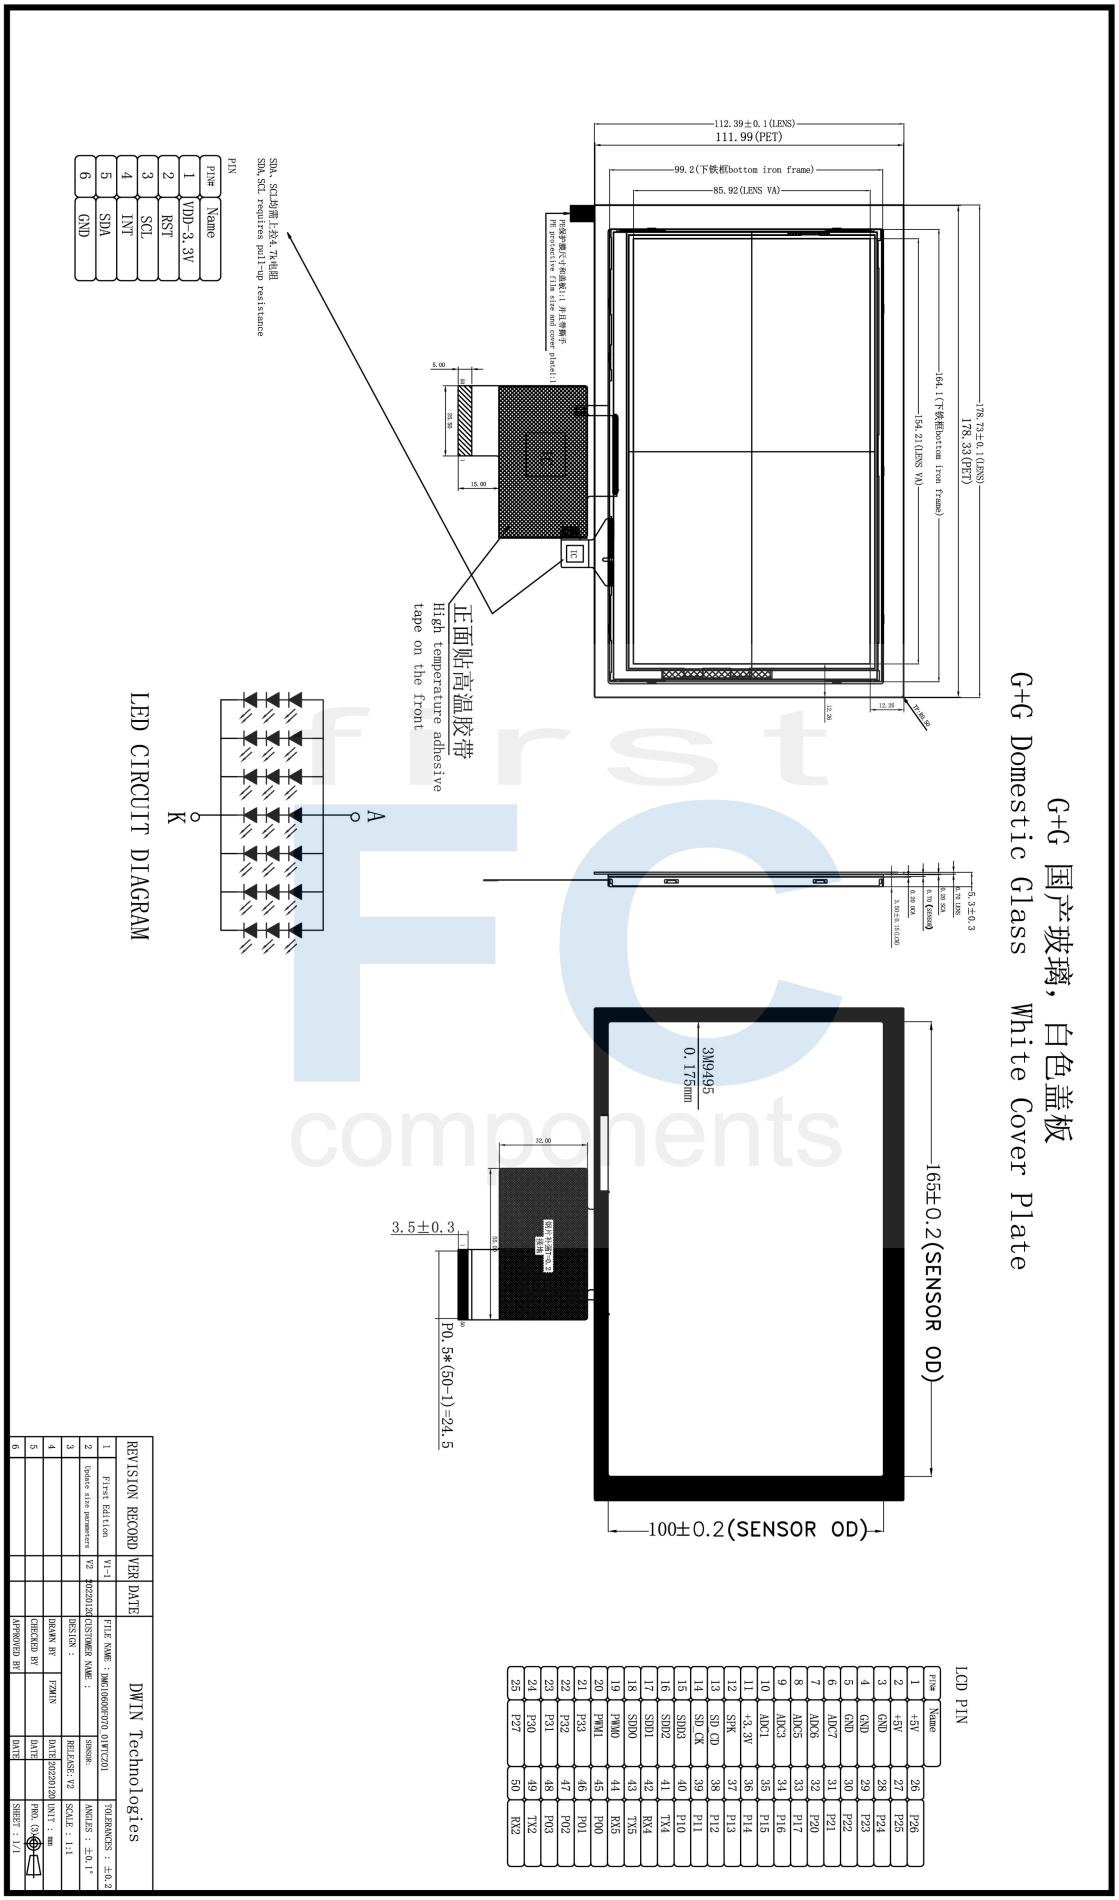
7 包装和物理尺寸 Packing Capacity & Dimension

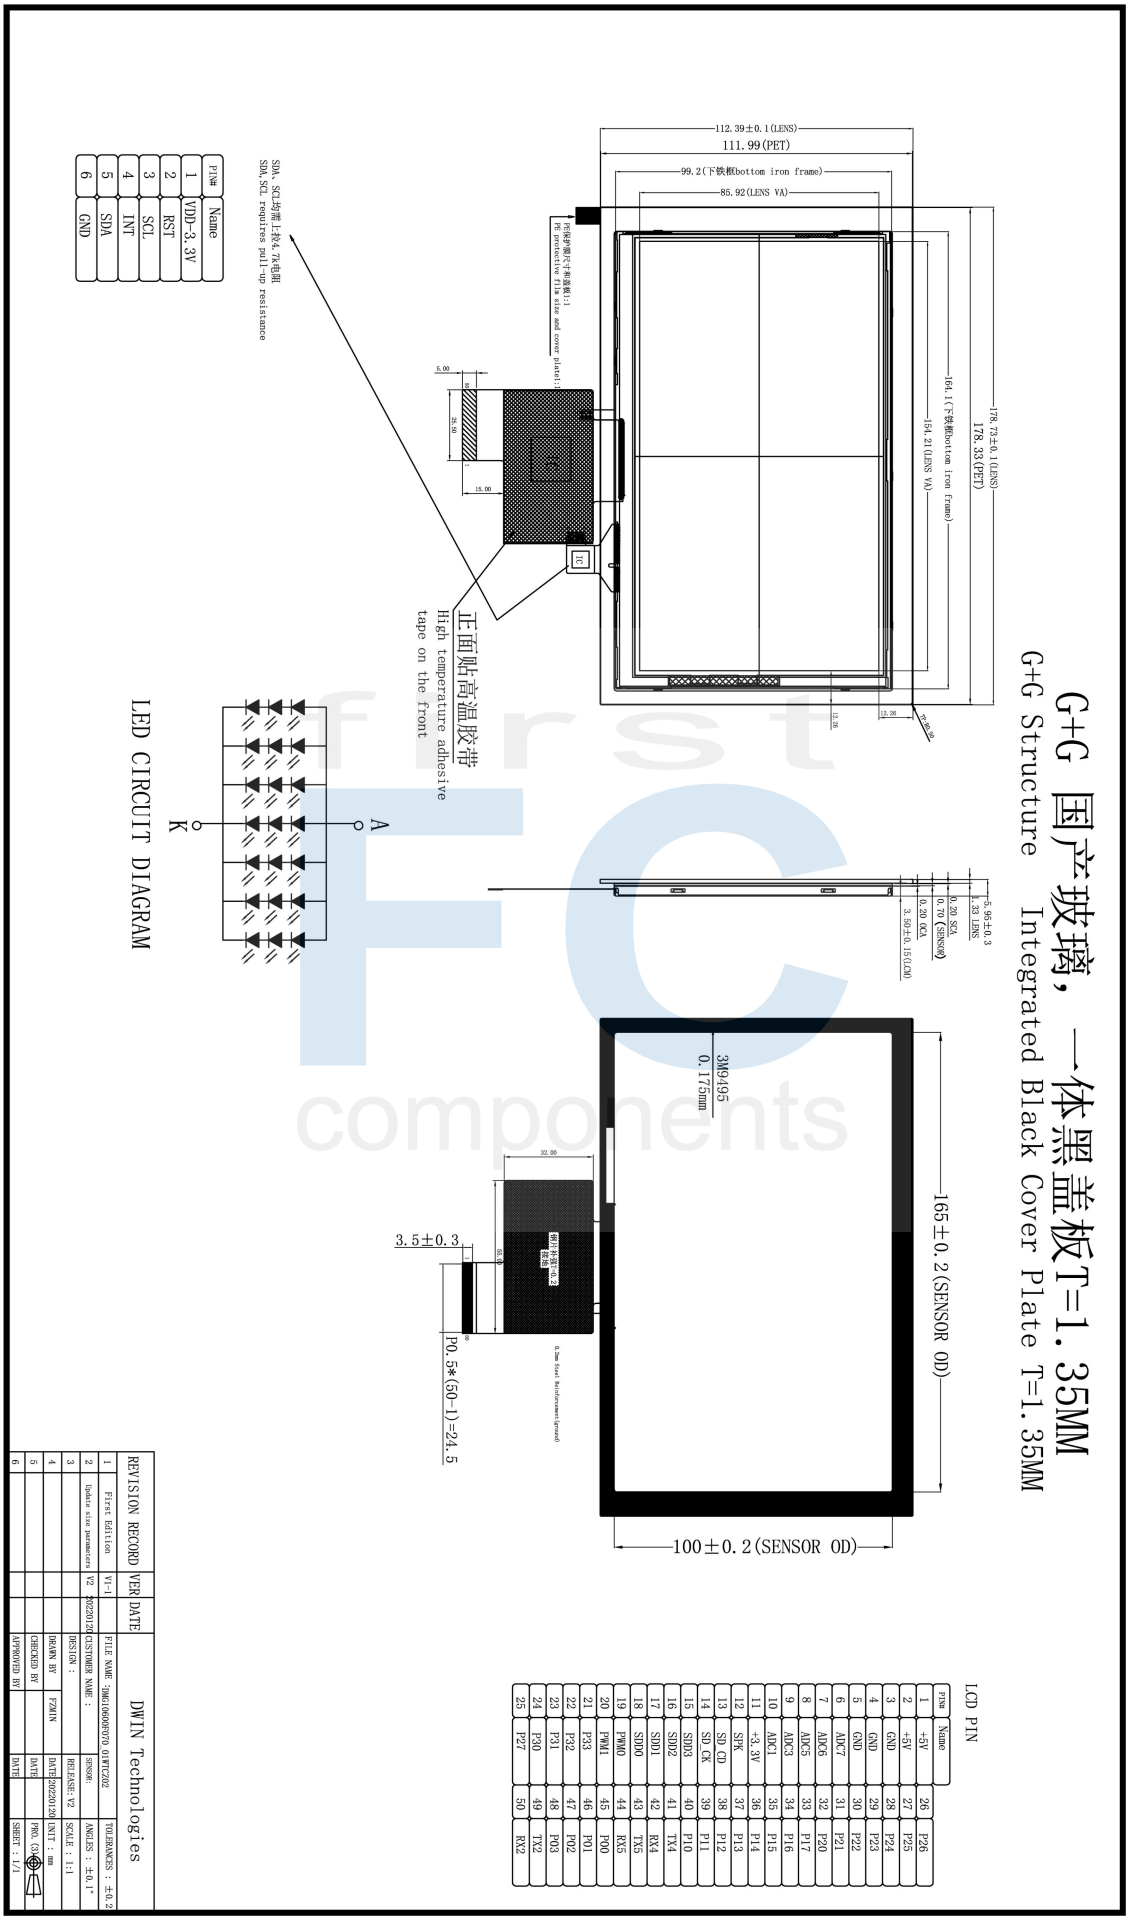
尺寸 Dimension				
DMG10600F070_01WTC	外形尺寸 Dimension	178.73(W) ×112.39(H) ×5.3(T) mm		
	净重量 Net Weight	176g		
DMG10600F070_01WTCZ01	外形尺寸 Dimension	178.73(W) ×112.39(H) ×5.3(T) mm		
	净重量 Net Weight	176g		
DMG10600F070_01WTCZ02	外形尺寸 Dimension	178.73(W) ×112.39(H)×5.95(T) mm		
	净重量 Net Weight	212g		
包装标准 Packing Capacity				
包装箱型号 Model	**包装箱尺寸 Size**	**层数（层） Layer**	**数量/层（片） Quantity/Layer**	**总数量（片） Quantity(Pcs)**
纸箱 Carton	375mm(L)×275mm(W)×125mm(H)	-	-	-

声明：产品设计改善或变更，不单独另行通知。
Disclaimer: The product design is subject to alternation and improvement without prior notice.

迈创科技技术文档 DWIN Technologies Technical Document
FC Components


G+G 国产玻璃，黑色盖板
G+G Domestic Glass Black Cover Plate
LED CIRCUIT DIAGRAM
正面贴高温胶带
High temperature adhesive tape on the front
去掉上铁框，包边处理（全贴）
Remove the upper iron and wrap the edge(full lamination)
LCD PIN
DWIN Technologies
REVISION RECORD


G+G 国产玻璃，白色盖板
G+G Domestic Glass White Cover Plate
112.39±0.1(LENS)
111.99(PET)
99.2(下铁框bottom iron frame)
85.92(LENS VA)
178.73±0.1(LENS)
178.33(PET)
164.1(下铁框bottom iron frame)
154.21(LENS VA)
正面贴高温胶带
High temperature adhesive tape on the front
LED CIRCUIT DIAGRAM
A
K
165±0.2(SENSOR OD)
100±0.2(SENSOR OD)
3.5±0.3
P0.5*(50-1)=24.5
LCD PIN
REVISION RECORD
DWIN Technologies
FILE NAME : DMG10600F070_01WTCZ01
DRAWN BY : FZWIN
CHECKED BY :
APPROVED BY :
SCALE : 1:1
UNIT : mm
SHEET : 1/1


G+G 国产玻璃，一体黑盖板T=1.35MM
G+G Structure Integrated Black Cover Plate T=1.35MM
LED CIRCUIT DIAGRAM
正面贴高温胶带
High temperature adhesive tape on the front
SDA、SCL均需上拉4.7K电阻
SDA, SCL requires pull-up resistance
PIN# Name
1 VDD=3.3V
2 RST
3 SCL
4 INT
5 SDA
6 GND
LCD PIN
PIN# Name
1 +5V
2 +5V
3 GND
4 GND
5 GND
6 ADC7
7 ADC6
8 ADC5
9 ADC3
10 ADC1
11 +3.3V
12 SPK
13 SD_CD
14 SD_CK
15 SDD3
16 SDD2
17 SDD1
18 SDD0
19 PWM0
20 PWM1
21 P33
22 P32
23 P31
24 P30
25 P27
26 P25
27 P24
28 P23
29 P22
30 P21
31 P20
32 P17
33 P16
34 P15
35 P14
36 P13
37 P12
38 P11
39 P10
40 RX4
41 TX4
42 RX5
43 TX5
44 RX6
45 P00
46 P01
47 P02
48 P03
49 TX2
50 RX2
112.39±0.1(LENS)
111.99(PET)
99.2(下铁框bottom iron frame)
85.92(LENS VA)
178.73±0.1(LENS)
178.33(PET)
164.1(下铁框bottom iron frame)
154.21(LENS VA)
165±0.2(SENSOR OD)
100±0.2(SENSOR OD)
3M9495
0.175mm
3.5±0.3
P0.5*(50-1)=24.5
5.95±0.3
1.33 LENS
0.20 SCA
0.70 (SENSOR)
0.20 OCA
3.50±0.15(LCM)
DWIN Technologies
REVISION RECORD
VER
DATE
First Edition
Update size parameters
DESIGN :
DRAWN BY
CHECKED BY
APPROVED BY
FILE NAME :
CUSTOMER NAME :
SENSOR:
RELEASE: V2
DATE
PCB(30)
SHEET : 1/1
TOLERANCES : ±0.2
ANGLES : ±0.1°
SCALE : 1:1
UNIT : mm

8 修订记录 Record of Revision

版本 Rev	日期 Date	描述 Content	编辑人 Editor
00	2022-04-02	首次发布 First Edition	欧阳开杏
01	2022-06-14	更新工作电压 Update Operating Voltage	欧阳开杏
02	2022-09-09	更新 CAD Update CAD	郑运佳
03	2022-11-17	修改尺寸说明 Modify dimension description	欧阳开杏

first FC components
+39 0332 1888005
+39 0332 320856
info@first-components.com
Via 2 Giugno, 20 – 21022 Azzate (VA) Italy
VAT number IT02764420127
REA Varese 285686
Social capital fully paid 100.000€
迪文科技 技术文档 DWIN Technology