
更改 REV	設變內容 MODIFICATION	修改 DRAWN	核准 APPROVED

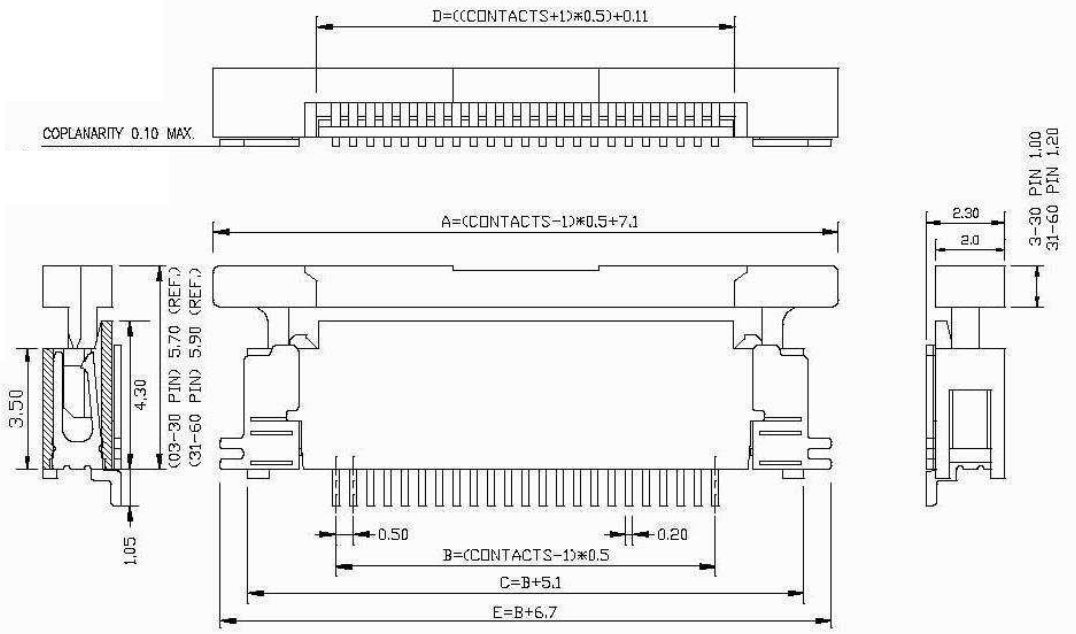


FEATURE AND SPECIFICATIONS


SIZES 03 TO 60 PIN.
FOR 0.3mm THICKNESS FFC/FPC.
VOLTAGE:50V MAX.
CURRENT:0.5A MAX.
CONTACT RESISTANCE:20 milliohms MAX.
INSULATION RESISTANCE:50 Megohms MIN.
DIELECTRIC WITHSTANDING VOLTAGE:250V AC.
TEMPERATURE:-40° C TO 85° C

MATERIAL AND FINISH


HOUSING:HIGH-TEMP. THERMOPLASTIC. UL 94V-0.
ACTUATOR:HIGH-TEMP. THERMOPLASTIC. UL 94V-0.
CONTACT:SEE ORDERING CODE
HOLDDOWN:BRASS. PLATING:Tin 100u",over Ni50u"

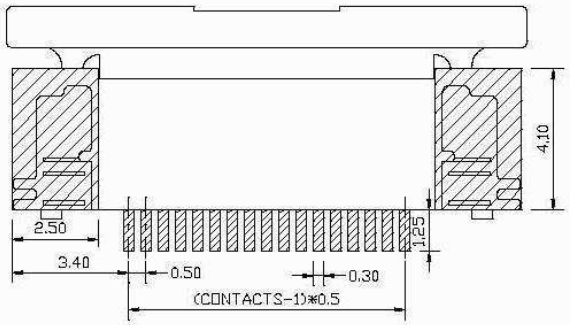


RECOMMENDED PCB LAYOUT



FFC/FPC DIMENSION
THICKNESS 0.30 mm

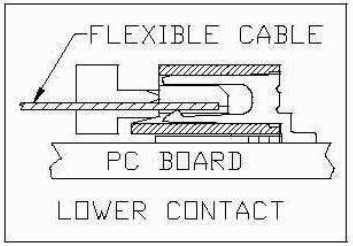



.X ±0.20	.X' ±	單位 MM	料號 JF51-2XX-X22X-X	諱銓科技有限公司	
.XX ±0.15	.XX' ±	材質		名稱 TITLE	ZIF FPC 0.5mm SMT CONN. HORIZONTAL LOWER CONTACT TYPE
.XXX ±0.10	.XXX' ±	處理	日期 2007.03.05	圖號 DWG NO.	
		數量	審核	SCALE	SHEET / REV.
			製圖	5:1	1/2 / A