TFT DISPLAY SPECIFICATION



WINSTAR Display Co.,Ltd.
華凌光電股份有限公司

Represented by:

first FC components

FIRST Components s.r.l.
www.first-components.com
technical@first-components.com
+39 0332 1888005

SPECIFICATION

MODULE NO.: WF0154-240240AS#0P0-FC

General Specifications

Item	Dimension	Unit
Size	1.54”	inch
Dot Matrix	240 x RGB x 240	dots
Module dimension	31.52 x 33.72 x 1.94	mm
Active area	27.72 x 27.72	mm
Pixel pitch	0.1155 x 0.1155	mm
LCD type	TFT, Normally Black, Transmissive	
Viewing Angle	80/80/80/80	
Backlight Type	LED, Normally White	
Drive IC	ST7789T3-G4-1 or Equivalent	
TFT Interface	SPI	
Touch Panel	Without Touch Panel	
Surface	Anti-Glare	

*Color tone slight changed by temperature and driving voltage.

first components

Absolute Maximum Ratings

Item	Symbol	Min	Typ	Max	Unit
Operating Temperature	TOP	-10	—	+60	℃
Storage Temperature	TST	-20	—	+70	℃

Electrical Characteristics

TFT LCD MODULE

Parameter	Symbol	Value			Unit
		Min.	Typ.	Max.	
Analog Supply Voltage	VDD	2.4	2.8	3.3	V
Power Supply for I/O System	IOVCC	1.65	1.8	3.3	V
Input High Voltage	VIH	0.7 IOVCC	-	IOVCC	V
Input Low Voltage	VIL	GND	-	0.3 IOVCC	mA
Output High Voltage	VoH	0.8 IOVCC	-	IOVCC	mA
Output Low Voltage	VoL	GND	-	0.2 IOVCC	W
(Panel+LSI) Power Consumption	Black Mode	-	6.0	-	mA
	Sleeping Mode	-	0.015	-	mA

first components

Interface

1. LCM PIN Definition

Pin No.	Symbol	Function
1	GND	Ground.
2	IOVCC	Power Supply for I/O System
3	CS	Chip selection pin
4	RESET	This signal will reset the device
5	RS	Display data/command selection pin in 4-line serial interface
6	GND	Ground.
7	SCL	This pin is used to be serial interface clock
8	SDA	SPI interface input/output pin
9	GND	Ground.
10	VDD	Power Supply for Analog
11	FMARK	Tearing effect signal is used to synchronize MCU to frame memory writing.
12	VLED-	Power Supply For LED Backlight Cathode Input
13	VLED-	Power Supply For LED Backlight Cathode Input.
14	VLED+	Power Supply For LED Backlight Anode Input.
15	VLED+	Power Supply For LED Backlight Anode Input.

first components

Optical Characteristics

Item		Symbol	Condition.	Min	Typ.	Max.	Unit	Remark
Response time		Tr+ Tf	θ=0°、Φ=0°	-	30	40	.ms	Note 3
Contrast ratio		CR	At optimized viewing angle	700	900	-	-	Note 4
Color Chromaticity	White	Wx	θ=0°、Φ=0	0.232	0.282	0.332		Note 2,6,7
		Wy		0.235	0.285	0.335		
Viewing angle	Hor.	ΘR	CR≧10	75	80	-	Deg.	Note 1
		ΘL		75	80	-		
	Ver.	ΦT		75	80	-		
		ΦB		75	80	-		
Brightness		-	-	330	380	-	cd/m^2	Center of display
Uniformity		(U)	-	75	-	-	%	Note 5

Ta=25±2℃

Note 1: Definition of viewing angle range

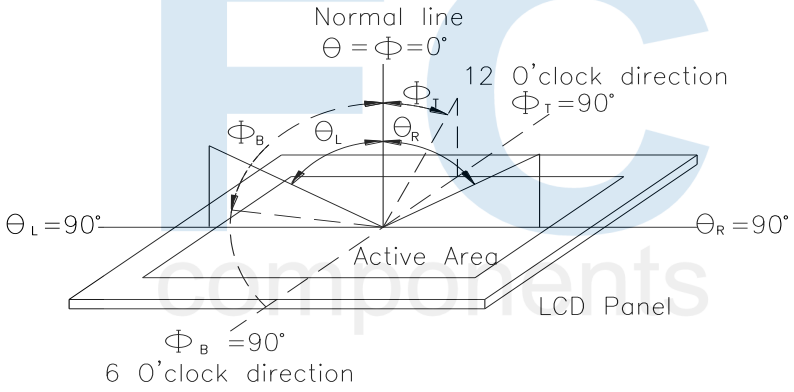


Fig 6.1. Definition of viewing angle

Note 2: Test equipment setup:

After stabilizing and leaving the panel alone at a driven temperature for 10 minutes, the measurement should be executed. Measurement should be executed in a stable, windless, and dark room. Optical specifications are measured by Topcon BM-7orBM-5 luminance meter 1.0° field of view at a distance of 50cm and normal direction.


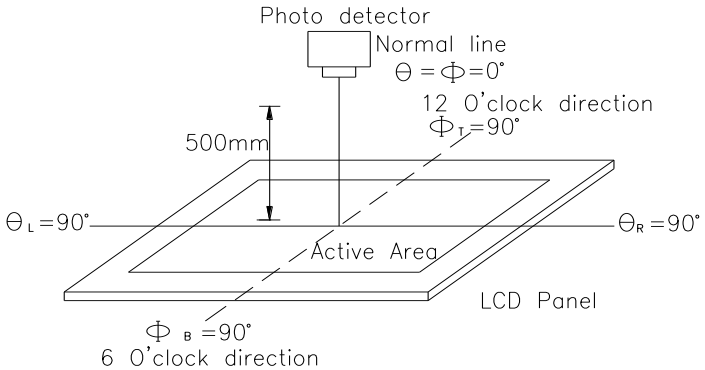


Fig 6.2. Optical measurement system setup

Contour Drawing

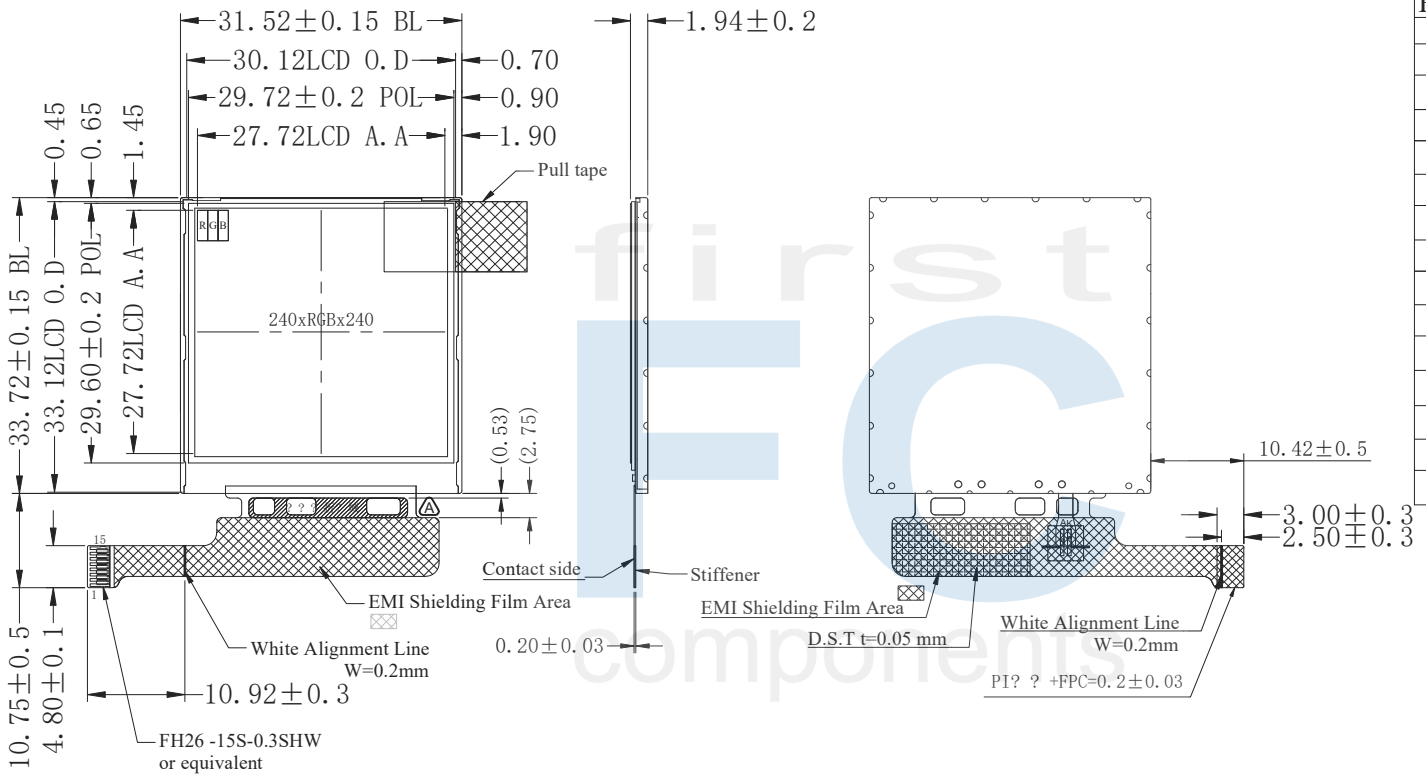

PinNo.	Symbol
1	GND
2	IOVCC
3	CS
4	RESET
5	RS
6	GND
7	SCL
8	SDA
9	GND
10	VDD
11	FMARK
12	VLED-
13	VLED-
14	VLED+
15	VLED+

The non-specified tolerance of dimension is ±0.3 mm .

first components