Next Vision Display
Brighten The Future

NEXT VISION DISPLAY

SPECIFICATION

CUSTOMER : _____

MODULE NO.: NT035-R002WS

Version	0
Engineer	
Date	2022/11/10

Next Vision Display
Brighten The Future

Customer:
Approved by

NEXT VISION DISPLAY CO., LTD.

地址: 中國上海小木橋路600號
ADD: 600 XIAO MU QIAO ROAD, SHANGHAI, CHINA

WEB: www.nextvisiondisplay.com

TECHNICAL: technical@nextvisiondisplay.com
MARKETING: marketing@nextvisiondisplay.com
SALES: sales@nextvisiondisplay.com

Represented by:

first FC components
FIRST Components s.r.l.
www.first-components.com
sales@first-components.com
+39 0332 1888005

General Specifications

Item	Dimension	Unit
Size	3.5	inch
Dot Matrix	320 x RGBx240(TFT)	dots
Module dimension	76.84(W) x 63.84(H) x 4.37(D)	mm
Active area	70.08 x 52.56	mm
Dot pitch	0.073 x 0.219	mm
LCD type	TFT, normally black, Transmissive	
View Direction	80/80/80/80	
Driver IC	ST7272A or equivalent	
Interface	24-bit RGB	
Aspect Ratio	4:3	
Backlight Type	LED,Normally White	
With /Without TP	With RTP	
Surface	Anti-Glare	

*Color tone slight changed by temperature and driving voltage.

Next Vision Display
Brighten The Future

Absolute Maximum Ratings

Item	Symbol	Min	Typ	Max	Unit
Operating Temperature	TOP	-20	—	+70	℃
Storage Temperature	TST	-30	—	+80	℃

Note: Device is subject to be damaged permanently if stresses beyond those absolute maximum ratings listed above

1. Temp. ≦60℃, 90% RH MAX. Temp.＞60℃, Absolute humidity shall be less than 90% RH at 60℃

Electrical Characteristics

1. Operating conditions:

Item	Symbol	Min	Typ	Max	Unit	Remark
Supply Voltage For LCM	VCC	3.0	3.3	4.2	V	
Supply Current For LCM	ICC	—	20	30	mA	Note 1


Note 1 : This value is test for VCC =3.3V , Ta=25 ℃ only

2. LED driving conditions

Parameter	Symbol	Min.	Typ.	Max.	Unit	Remark
LED current		-	20	-	mA	
Power Consumption		324	384	408	mW	
LED voltage	LED+	16.2	19.2	20.4	V	Note 1
LED Life Time		-	50,000	-	Hr	Note 2,3,4

Note 1 : There are 1 Groups LED

Next Vision Display
Brighten The Future

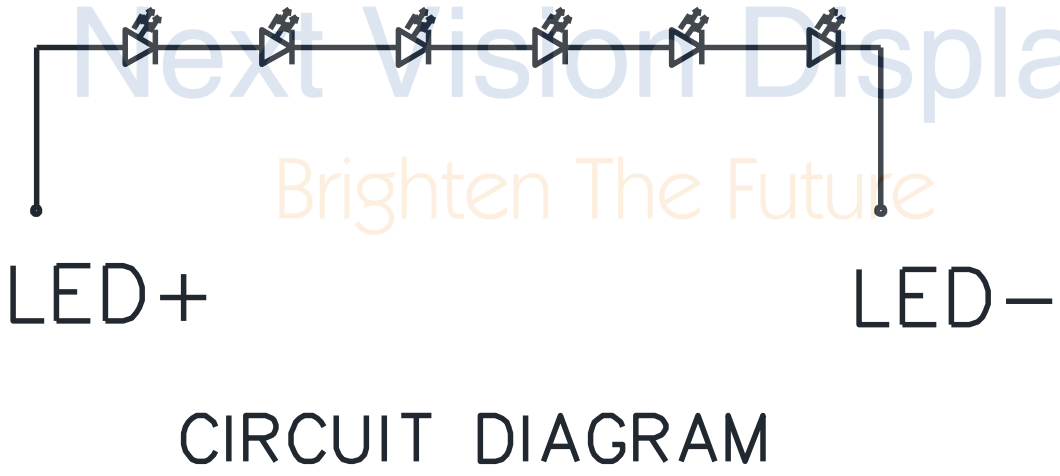

CIRCUIT DIAGRAM

Note 2 : Ta = 25 ℃
Note 3 : Brightness to be decreased to 50% of the initial value
Note 4 : The single LED lamp case

Interface

1. LCM PIN Definition


Pin	Symbol	Function	Remark
1	LED-	Power for LED backlight cathode	
2	LED-	Power for LED backlight cathode	
3	LED+	Power for LED backlight anode	
4	LED+	Power for LED backlight anode	
5	YU	Top electrode	
6	XL	Left electrode	
7	NC(SPI_IIC_SEL)	No connect	
8	/RESET	Hardware reset	
9	NC(CS)	No connect	
10	NC(SDA)	No connect	
11	NC(SCL)	No connect	
12	B0	Data bus	
13	B1	Data bus	
14	B2	Data bus	
15	B3	Data bus	
16	B4	Data bus	
17	B5	Data bus	
18	B6	Data bus	
19	B7	Data bus	
20	G0	Data bus	
21	G1	Data bus	
22	G2	Data bus	
23	G3	Data bus	
24	G4	Data bus	
25	G5	Data bus	
26	G6	Data bus	
27	G7	Data bus	
28	R0	Data bus	
29	R1	Data bus	
30	R2	Data bus	

Next Vision Display
Brighten The Future

31	R3	Data bus	
32	R4	Data bus	
33	R5	Data bus	
34	R6	Data bus	
35	R7	Data bus	
36	HSYNC	Horizontal sync signal, default is negative polarity.	
37	VSYNC	Vertical sync signal, default is negative polarity.	
38	DCLK	Dot-clock signal and oscillator source	
39	NC(HDIR)	No connect	
40	NC(VDIR)	No connect	
41	VCC	Power Supply	
42	VCC	Power Supply	
43	YD	Down electrode	
44	XR	Right electrode	
45	NC(PARA_SERI)	No connect	
46	NC(BIST_EN)	No connect	
47	NC(ENPROG)	No connect	
48	NC	No connect	
49	NC	No connect	
50	NC	No connect	
51	NC(DISP)	No connect	
52	DE	Data input enable. Display access is enabled when DE is “H” .	
53	GND	Ground	
54	GND	Ground	


Next Vision Display
Brighten The Future

Touch Panel Information

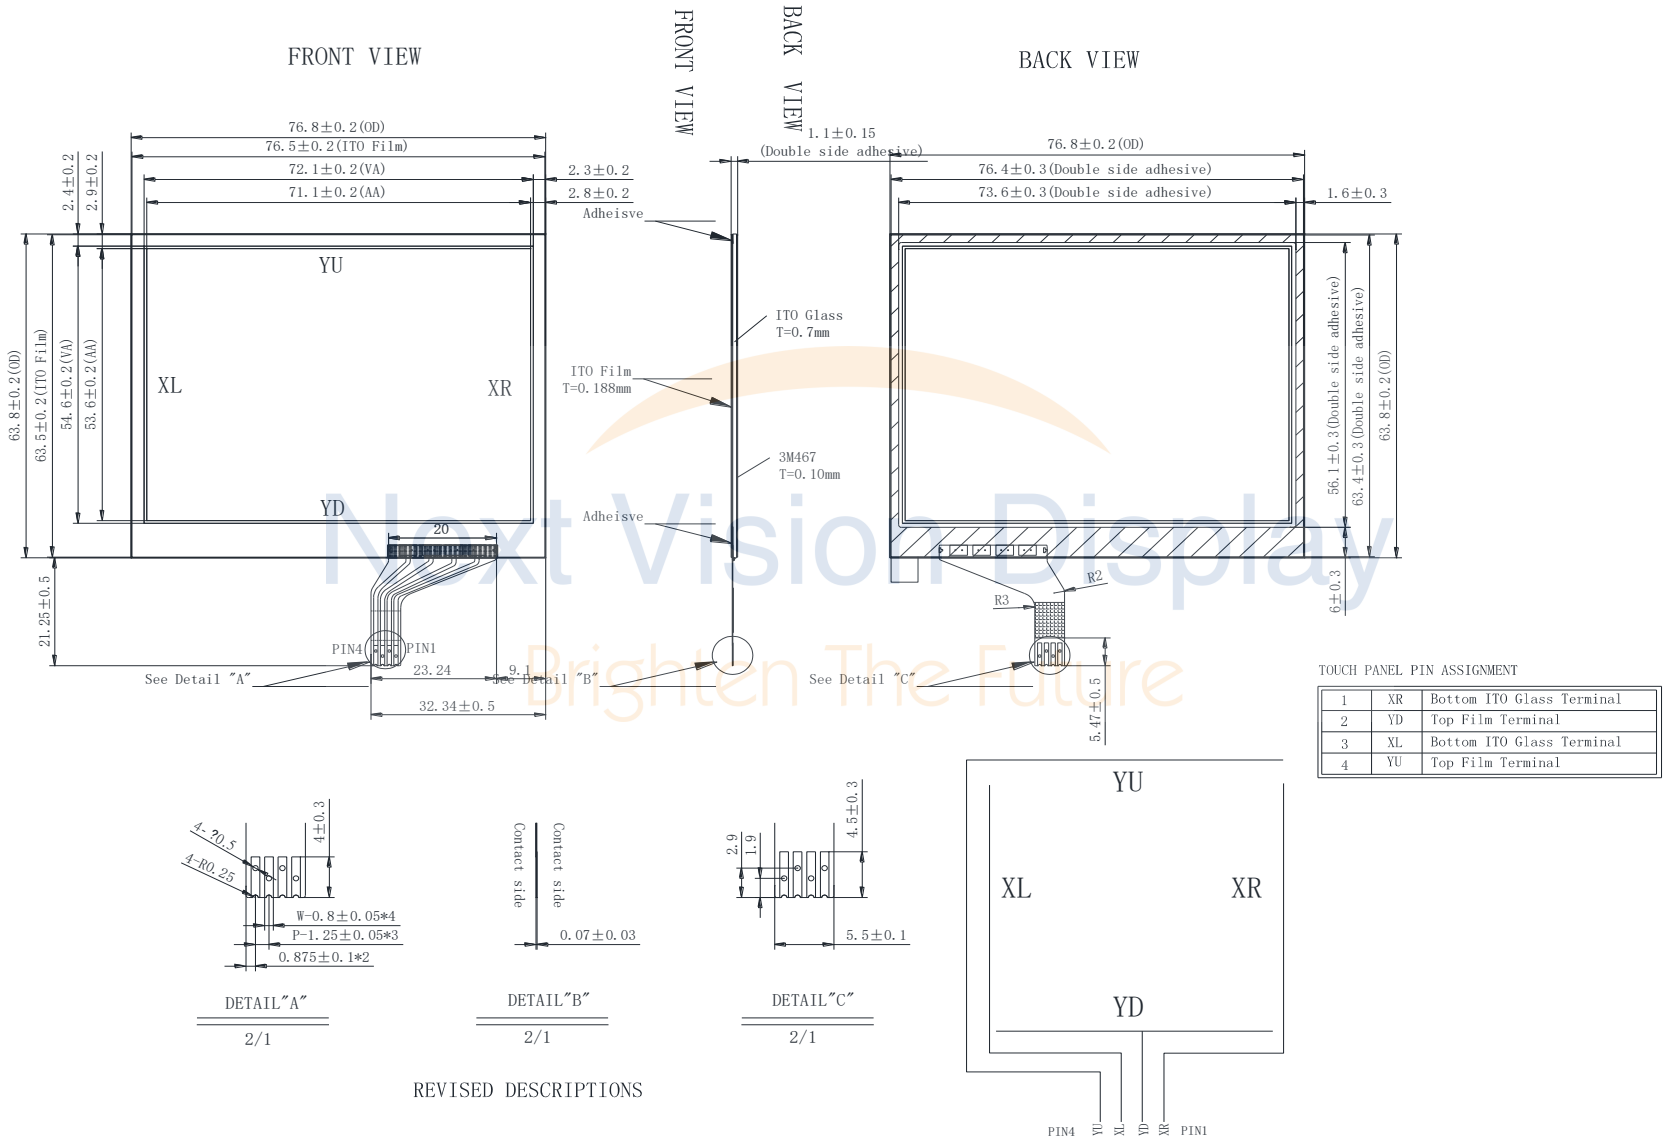

Next Vision Display
Brighten The Future

Contour Drawing

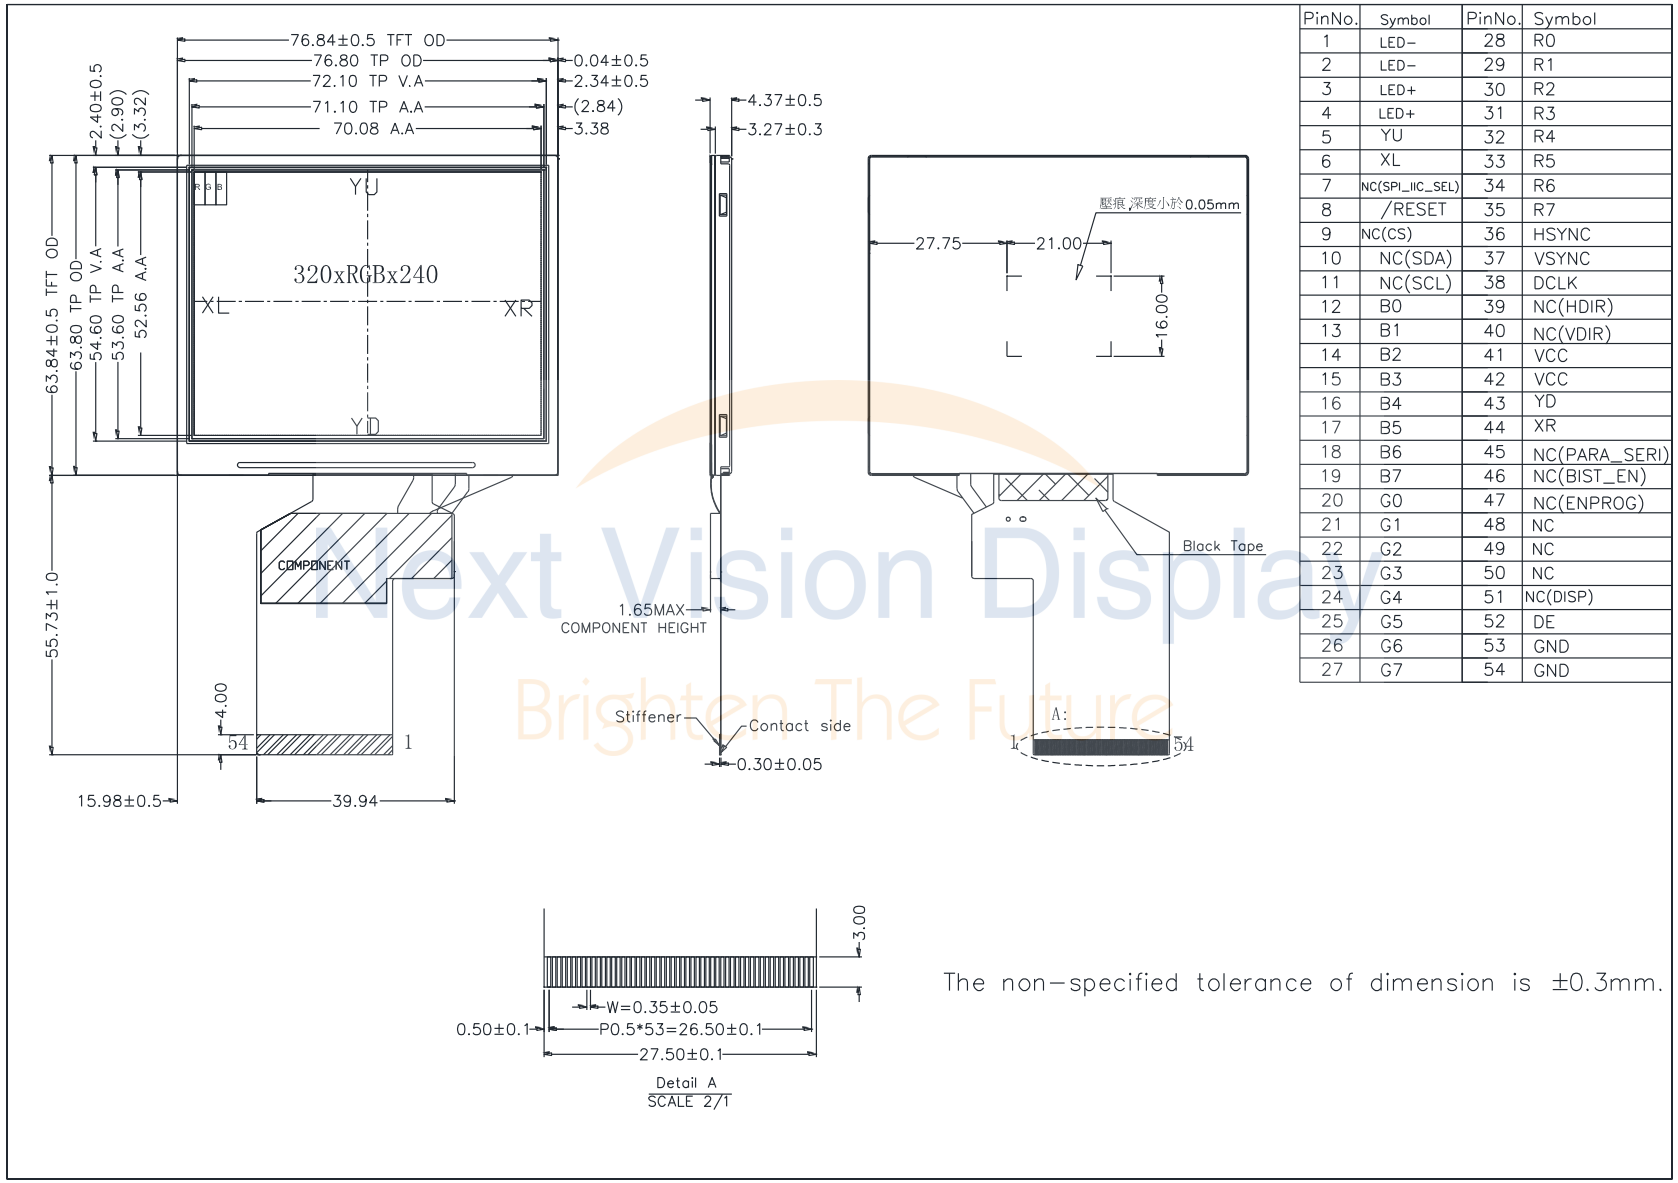

PinNo.	Symbol	PinNo.	Symbol
1	LED-	28	R0
2	LED-	29	R1
3	LED+	30	R2
4	LED+	31	R3
5	YU	32	R4
6	XL	33	R5
7	NC(SPI_IIC_SEL)	34	R6
8	/RESET	35	R7
9	NC(CS)	36	HSYNC
10	NC(SDA)	37	VSYNC
11	NC(SCL)	38	DCLK
12	B0	39	NC(HDIR)
13	B1	40	NC(VDIR)
14	B2	41	VCC
15	B3	42	VCC
16	B4	43	YD
17	B5	44	XR
18	B6	45	NC(PARA_SERI)
19	B7	46	NC(BIST_EN)
20	G0	47	NC(ENPROG)
21	G1	48	NC
22	G2	49	NC
23	G3	50	NC
24	G4	51	NC(DISP)
25	G5	52	DE
26	G6	53	GND
27	G7	54	GND

Next Vision Display
Brighten The Future