**Winstar Display Co., LTD**
**華凌光電股份有限公司**
*WEB: https://www.winstar.com.tw E-mail: sales@winstar.com.tw*

# SPECIFICATION

**CUSTOMER :** _____

**MODULE NO.:** WF50-800480BD#0SF0-FC

| | |
|---|---|
| **APPROVED BY:**<br>**( FOR CUSTOMER USE ONLY )** | **PCB VERSION:** **DATA:** |

| SALES BY | APPROVED BY | CHECKED BY | PREPARED BY |
|---|---|---|---|
| first FC components | | | 葉虹蘭 |
| **ISSUED DATE:** 2019/07/05 | | | |

Represented by:
first FC components
FIRST Components s.r.l.
www.first-components.com
technical@first-components.com
+39 0332 1888005

# 3.General Specifications

| Item | Dimension | Unit |
|---|---|---|
| Size | 5.0 | inch |
| Dot Matrix | 800× 3(RGB) × 480 | dots |
| Module dimension | 120.7(W) ×75.8(H) ×2.8mm | mm |
| Active area | 108(W) ×64.8 (H) mm | mm |
| Dot pitch | 0.135(W) ×0.135(H) mm | mm |
| LCD type | TFT, Normally White, Transmissive | |
| View Direction | 12 o'clock | |
| Gray Scale Inversion Direction | 6 o'clock | |
| Aspect Ratio | 16:9 | |
| Backlight Type | LED ,Normally White | |
| With /Without TP | Without TP | |
| Surface | Anti-Glare | |

*Color tone slight changed by temperature and driving voltage.

# 4.Absolute Maximum Ratings

| Item | Symbol | Min | Typ | Max | Unit |
|---|---|---|---|---|---|
| Operating Temperature | TOP | -20 | — | +70 | ℃ |
| Storage Temperature | TST | -30 | — | +80 | ℃ |

Note: Device is subject to be damaged permanently if stresses beyond those absolute maximum ratings listed above

1. Temp. ≦60℃, 90% RH MAX. Temp.＞60℃, Absolute humidity shall be less than 90% RH at 60℃

# 7.Interface

## 7.1. LCM PIN Definition

FPC Connector is used for the module electronics interface.

| Pin | Symbol | Function | Remark |
|---|---|---|---|
| 1 | VLED- | Power for LED backlight (Cathode) | |
| 2 | VLED+ | Power for LED backlight (Anode) | |
| 3 | GND | Power Ground | |
| 4 | VDD | Power voltage | |
| 5 | R0 | Red data (LSB) | |
| 6 | R1 | Red data | |
| 7 | R2 | Red data | |
| 8 | R3 | Red data | |
| 9 | R4 | Red data | |
| 10 | R5 | Red data | |
| 11 | R6 | Red data | |
| 12 | R7 | Red data(MSB) | |
| 13 | G0 | Green data(LSB) | |
| 14 | G1 | Green data | |
| 15 | G2 | Green data | |
| 16 | G3 | Green data | |
| 17 | G4 | Green data | |
| 18 | G5 | Green data | |
| 19 | G6 | Green data | |
| 20 | G7 | Green data(MSB) | |
| 21 | B0 | Blue data(LSB) | |
| 22 | B1 | Blue data | |
| 23 | B2 | Blue data | |
| 24 | B3 | Blue data | |
| 25 | B4 | Blue data | |
| 26 | B5 | Blue data | |
| 27 | B6 | Blue data | |
| 28 | B7 | Blue data(MSB) | |
| 29 | GND | Power Ground | |
| 30 | CLK | Sample clock | |


first components

| | | | |
|---|---|---|---|
| 31 | DISP | Display on/off | |
| 32 | NC/HS | No connection /Horizontal sync input | (Note) |
| 33 | NC/VS | No connection /Vertical sync input | (Note) |
| 34 | DE | Data input enable | |
| 35 | NC | No connection | |
| 36 | GND | Power Ground | |
| 37 | NC | No connection | |
| 38 | NC | No connection | |
| 39 | NC | No connection | |
| 40 | NC | No connection | |

Note : This module default function is for DE mode, if this module want change to use SYNC mode , the FPC have to modify resistive jumper .

first FC components

# 9.Contour Drawing

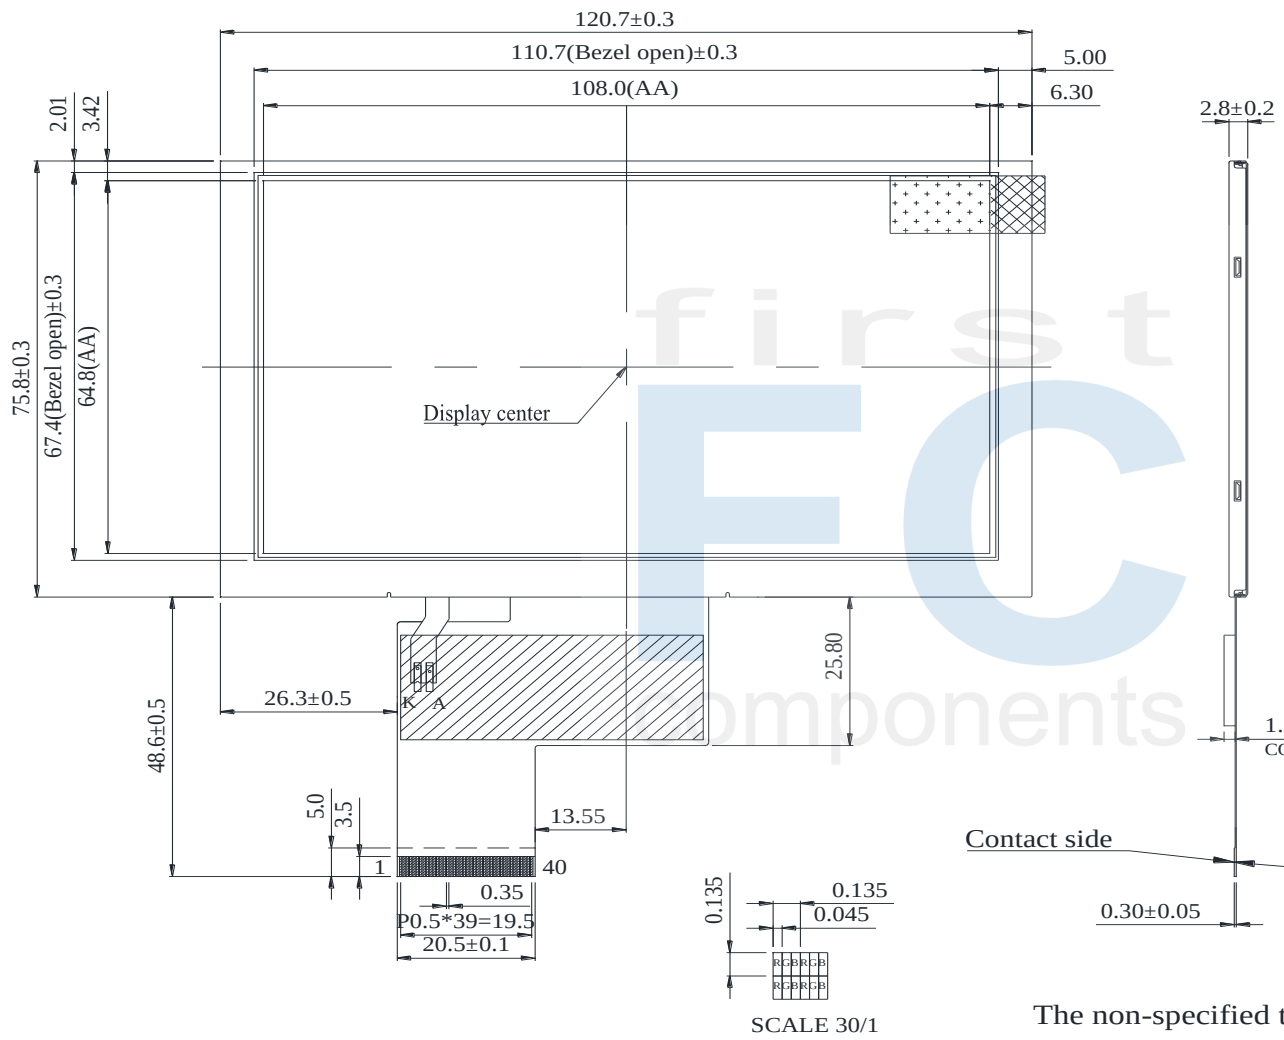


| PIN NO. | SYMBOL | PIN NO. | SYMBOL |
|---|---|---|---|
| 1 | $V_{LED-}$ | 21 | B0 |
| 2 | $V_{LED+}$ | 22 | B1 |
| 3 | GND | 23 | B2 |
| 4 | $V_{DD}$ | 24 | B3 |
| 5 | R0 | 25 | B4 |
| 6 | R1 | 26 | B5 |
| 7 | R2 | 27 | B6 |
| 8 | R3 | 28 | B7 |
| 9 | R4 | 29 | GND |
| 10 | R5 | 30 | CLK |
| 11 | R6 | 31 | DISP |
| 12 | R7 | 32 | NC/$H_{Sync}$ |
| 13 | G0 | 33 | NC/$V_{Sync}$ |
| 14 | G1 | 34 | DE |
| 15 | G2 | 35 | NC |
| 16 | G3 | 36 | GND |
| 17 | G4 | 37 | NC |
| 18 | G5 | 38 | NC |
| 19 | G6 | 39 | NC |
| 20 | G7 | 40 | NC |

The non-specified tolerance of dimension is ±0.3mm.

first FC components