Winstar Display Co., LTD
華凌光電股份有限公司
WEB: https://www.winstar.com.tw E-mail: sales@winstar.com.tw

# SPECIFICATION

## MODULE NO.: WF35-320240QD#B06-FC

# General Specifications

| Item | Dimension | Unit |
|---|---|---|
| Size | 3.5 | inch |
| Dot Matrix | 320×RGB×240(TFT) | dots |
| Module dimension | 93.5×66.44×8.56 | mm |
| Active area | 70.08×52.56 | mm |
| Dot pitch | 0.073×0.219 | mm |
| LCD type | TFT, Normally White, Transmissive | |
| View Direction | 12 o'clock | |
| Gray Scale Inversion Direction | 6 o'clock | |
| Aspect Ratio | 4:3 | |
| Backlight Type | LED, Normally White | |
| Controller IC | SSD1963 | |
| TFT Interface | Digital 8080 family MPU 8bit/16bit | |
| PCAP IC | FT5426DQ8 | |
| PCAP Interface | I2C | |
| PCAP FW Version: | FN032A024__FT5426_V03_20180614_all.bin | |
| Touch Panel | PCAP | |
| Surface | Glare | |

*Color tone slight changed by temperature and driving voltage.

WINSTAR DISPLAY CO., LTD

# Absolute Maximum Ratings

| Item | Symbol | Min | Typ | Max | Unit |
|---|---|---|---|---|---|
| Operating Temperature | TOP | -20 | — | +70 | ℃ |
| Storage Temperature | TST | -30 | — | +80 | ℃ |

# Electrical Characteristics

**Operating conditions: (CON2.Pin1=GND, Pin2=VDD)**

| Item | Symbol | Condition | Min | Typ | Max | Unit |
|---|---|---|---|---|---|---|
| Supply Voltage For LCM | VDD | — | 3.0 | 3.1 | 3.3 | V |
| Supply Current For LCM | IDD | — | — | 210 | 350 | mA |

WINSTAR DISPLAY CO., LTD


# Interface

**1. LCM PIN Definition**

| Pin | Symbol | Function |
|---|---|---|
| 1 | GND | System ground pin of the IC. Connect to system ground. |
| 2 | VDD | Power Supply : +3.3V |
| 3 | BL_E | Backlight control signal , H: On \ L: Off |
| 4 | D/C | Data/Command select |
| 5 | WR | Write strobe signal |
| 6 | RD | Read strobe signal |
| 7 | DB0 | Data bus |
| 8 | DB1 | Data bus |
| 9 | DB2 | Data bus |
| 10 | DB3 | Data bus |
| 11 | DB4 | Data bus |
| 12 | DB5 | Data bus |
| 13 | DB6 | Data bus |
| 14 | DB7 | Data bus |
| 15 | DB8 | Data bus (When select 8bits Mode, this pin is NC) |
| 16 | DB9 | Data bus (When select 8bits Mode, this pin is NC) |
| 17 | DB10 | Data bus (When select 8bits Mode, this pin is NC) |
| 18 | DB11 | Data bus (When select 8bits Mode, this pin is NC) |
| 19 | DB12 | Data bus (When select 8bits Mode, this pin is NC) |
| 20 | DB13 | Data bus (When select 8bits Mode, this pin is NC) |
| 21 | DB14 | Data bus (When select 8bits Mode, this pin is NC) |
| 22 | DB15 | Data bus (When select 8bits Mode, this pin is NC) |
| 23 | NC | No connect |
| 24 | CTP_INT | External interrupt to the host |
| 25 | CS | Chip select |
| 26 | RST | Hardware reset |
| 27 | NC | No connect |
| 28 | NC | No connect |
| 29 | CTP_SCL | I2C clock input |
| 30 | CTP_SDA | I2C data input and output |
| 31 | CTP_RST | External Reset, Low is active |
| 32 | NC | No connect |
| 33 | VLED- | VLED- for B/L LED inverter (GND) |
| 34 | VLED- | VLED- for B/L LED inverter (GND) |
| 35 | VLED+ | VLED+ for B/L LED inverter (+3.3V) |
| 36 | VLED+ | VLED+ for B/L LED inverter (+3.3V) |

WINSTAR DISPLAY CO., LTD

# Contour Drawing

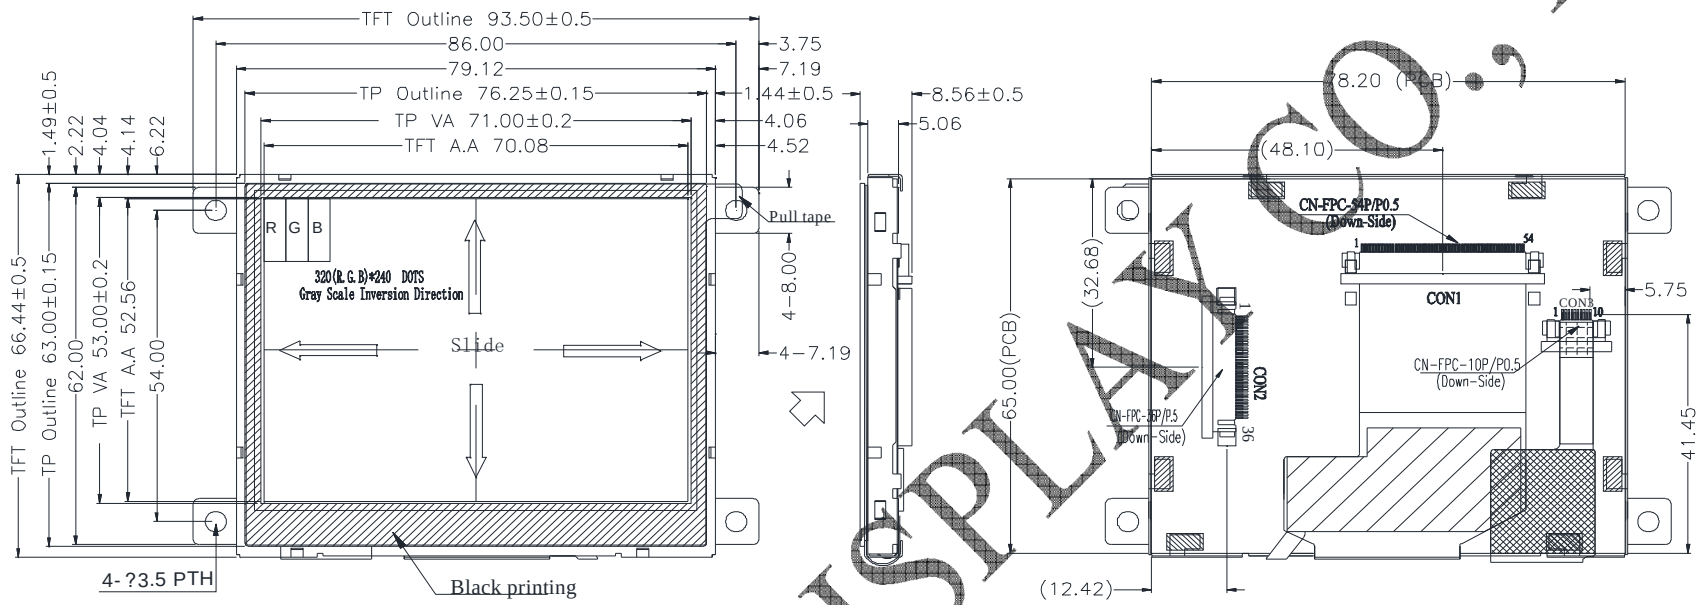


| PIN | Symbol |
|---|---|
| 1 | GND |
| 2 | VDD |
| 3 | BL_E |
| 4 | D/C |
| 5 | WR |
| 6 | RD |
| 7 | DB0 |
| 8 | DB1 |
| 9 | DB2 |
| 10 | DB3 |
| 11 | DB4 |
| 12 | DB5 |
| 13 | DB6 |
| 14 | DB7 |
| 15 | DB8 |
| 16 | DB9 |
| 17 | DB10 |
| 18 | DB11 |
| 19 | DB12 |
| 20 | DB13 |
| 21 | DB14 |
| 22 | DB15 |
| 23 | NC |
| 24 | CTP_INT |
| 25 | CS |
| 26 | RST |
| 27 | NC |
| 28 | NC |
| 29 | CTP_SCL |
| 30 | CTP_SDA |
| 31 | CTP_RST |
| 32 | NC |
| 33 | VLED- |
| 34 | VLED- |
| 35 | VLED+ |
| 36 | VLED+ |

The non-specified tolerance of dimension is ±0.3mm.

WINSTAR DISPLAY CO.,LTD