
User Guide Evaluation Kit for TFT 2.83" MCU interface, No touch

NT028-N001MI-D

TFT panel



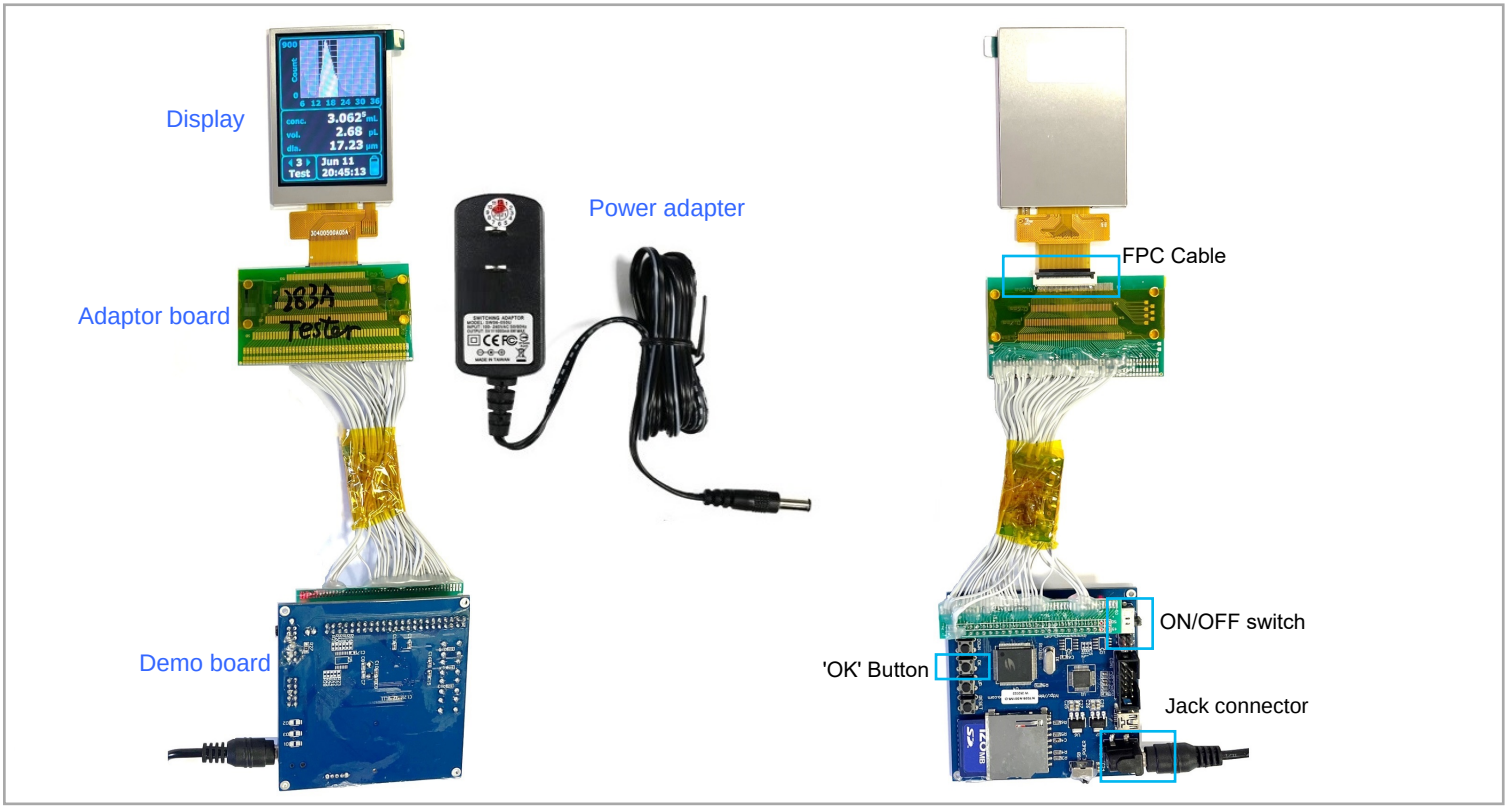

Kit Assembling & User Guide

1) Connect the TFT Display module to the TFT Adaptor board via FPC Cable (front contact)
2) Insert 5V 2A power adapter to the Demo board through power jack connector
2) Power ON the Demo board through Power ON/OFF switch
3) Press the 'OK' Button for the images change (photos, grey scale, colors scale...)