SPECIFICATION

CUSTOMER :

MODULE NO.: TST0005R0B4111XXXX03

General Specification

Construction:

Construction	Materials	Comment
Cover lens	glass	Thickness: 0.7mm
LOCA	Adhesive	Thickness: 0.175mm
ITO Glass	ITO glass	Thickness: 0.70mm

WINSTAR DISPLAY CO., LTD

Represented by:
first FC components
FIRST Components srl Via Cavour 69, 21020 Buguggiate (VA)
T. +39 0332 1888005 web: www.first-components.com

Mechanical characteristics:

Item	Description	Unit
Outside Dimension	119.7±0.15*75.2±0.15	mm
View Area	109±0.2*65.1±0.2	mm
Active Area	110±0.2*66.1±0.2	mm
Thickness	1.675±0.15(With AD)	mm
Input Method	Finger	
Hardness Of Surface	Hard Surface : ≥7H	
Accuracy	+/-1mm@10mm	mm
Support Operation	Finger	5 Finger
Channel	10*16	
Interface	I2C	
Supported Operating Systems	Android2.0-4.2Windows	
Controller IC	FT5426DQ8	


WINSTAR DISPLAY CO.,LTD

Interface Pin Function

NO.	Pin Name
1	VSS
2	VDDT
3	SCL
4	NC
5	SDA
6	NC
7	RST
8	NC
9	INT
10	VSS

WINSTAR DISPLAY CO.,LTD

Contour Drawing

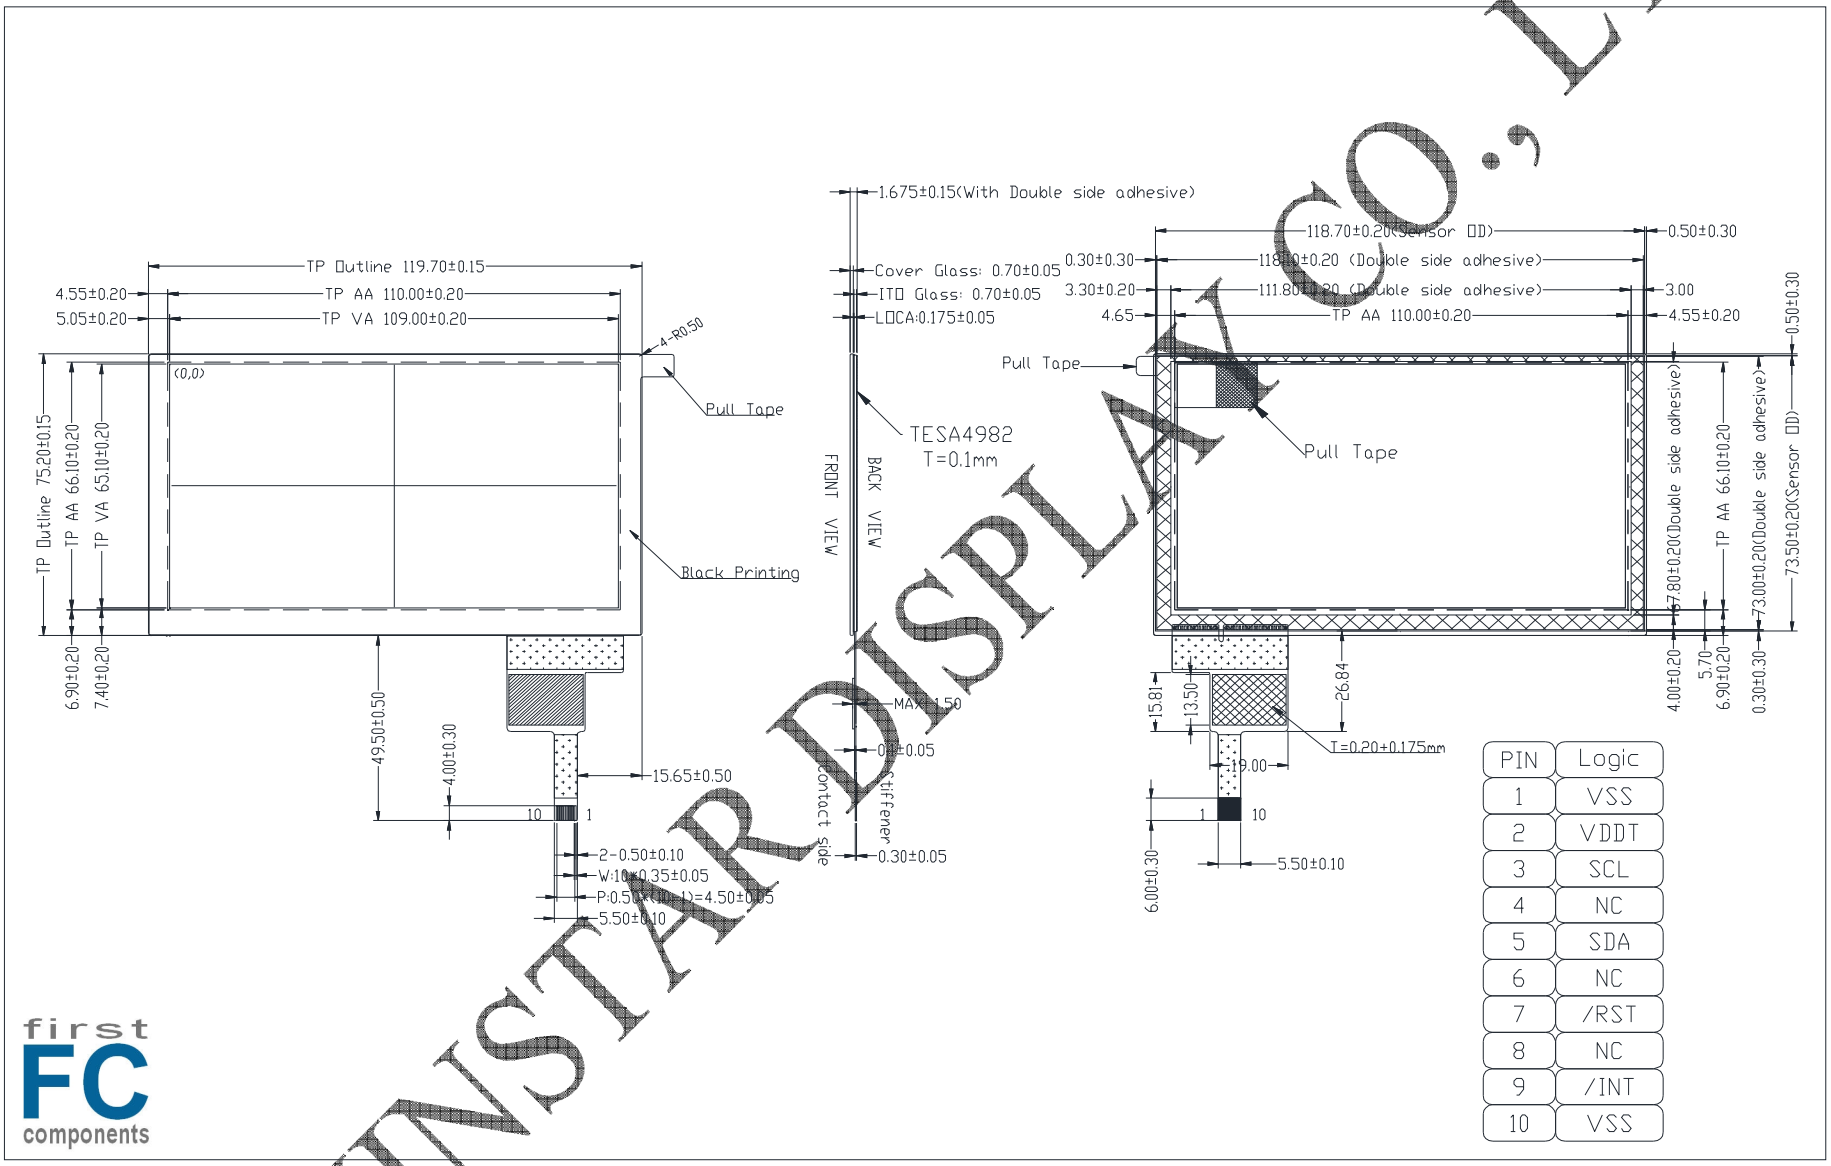

PIN	Logic
1	VSS
2	VDDT
3	SCL
4	NC
5	SDA
6	NC
7	/RST
8	NC
9	/INT
10	VSS

WINSTAR DISPLAY CO.,LTD