SPECIFICATION Version: A

CUSTOMER :	
MODULE NO. :	**WEH1602B#HP3N00100-FC**

APPROVED BY: **(FOR CUSTOMER USE ONLY)**	

SALES BY	APPROVED BY	CHECKED BY	PREPARED BY
first FC components			
RELEASE DATE:			

■APPROVAL FOR SPECIFICATIONS ONLY

□APPROVAL FOR SPECIFICATIONS AND SAMPLE

Represented by:


first FC components
FIRST Components s.r.l.
www.first-components.com
technical@first-components.com
+39 0332 1888005


2.General Specification

Item	Dimension	Unit
Number of Characters	16 characters x 2 Lines	–
Module dimension	122.0 x 44.0 x 10.0(MAX)	mm
View area	98.0 x 21.0	mm
Active area	91.14 x 18.98	mm
Dot size	0.90 x 1.06	mm
Dot pitch	0.96 x 1.12	mm
Character size	4.74 x 8.9	mm
Character pitch	5.76 x 10.08	mm
Panel type	OLED , Blue	
Duty	1/16	
IC	WS0010-TX	
Interface	6800	
Size	3.67 inch	

WINSTAR DISPLAY Co., Ltd
first components

3. Contour Drawing & Block Diagram

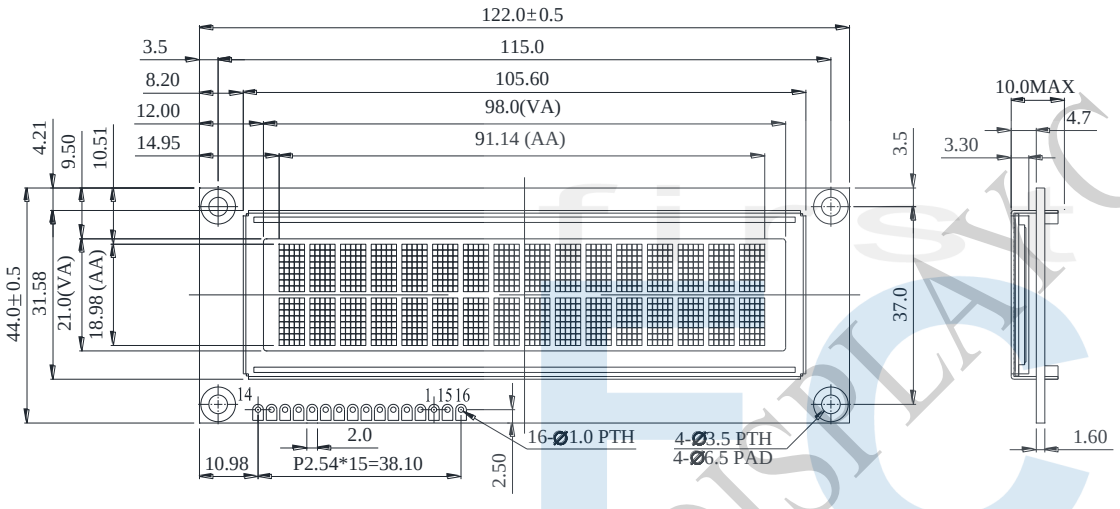

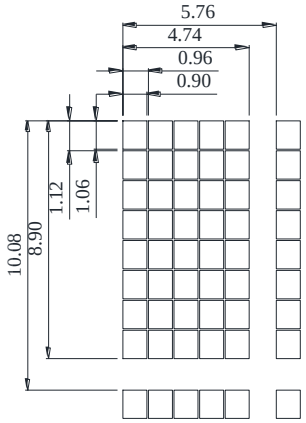

DOT SIZE
SCALE 5/1

PIN NO.	SYMBOL
1	Vss
2	Vdd
3	NC
4	RS
5	R/$\overline{W}$
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	NC
16	NC

The non-specified tolerance of dimension is ±0.3 mm .

WINSTAR DISPLAY Co., Ltd.
first components

4.Interface Pin Function

Pin No.	Symbol	Level	Description
1	VSS	0V	Ground
2	VDD	3.3V	Supply Voltage for logic
3	NC	—	No connection
4	RS	H/L	H: DATA, L: Instruction code
5	R/W	H/L	H: Read(Module→MPU) L: Write(MPU→Module)
6	E	H,H→L	Chip enable signal
7	DB0	H/L	Data bit 0
8	DB1	H/L	Data bit 1
9	DB2	H/L	Data bit 2
10	DB3	H/L	Data bit 3
11	DB4	H/L	Data bit 4
12	DB5	H/L	Data bit 5
13	DB6	H/L	Data bit 6
14	DB7	H/L	Data bit 7
15	NC	—	No connection
16	NC	—	No connection

5.Absolute Maximum Ratings

Item	Symbol	Min	Max	Unit	Notes
Operating Temperature	T_{OP}	-40	+80	°C	-
Storage Temperature	T_{ST}	-40	+85	°C	-
Supply Voltage For Logic	V_{DD}-V_{SS}	-0.3	3.6	V	-

WINSTAR DISPLAY CO., Ltd.
first components