WINSTAR Display

OLED SPECIFICATION

Model No:

WEG10032x#A08-FC

WINSTAR DISPLAY CO.; LTD

Represented by:

first FC components

FIRST Components srl Via Cavour 69, 21020 Buguggiate (VA)


T. +39 0332 1888005 web: www.first-components.com


General Specification

Item	Dimension	Unit
Dot Matrix	100 x 32 Dots	–
Module dimension	98.0 x 60.0 x 10.0(MAX)	mm
View area	77.0 x 25.20	mm
Active area	58.95 x 19.15	mm
Dot size	0.54 x 0.55	mm
Dot pitch	0.59x 0.60	mm
Panel Type	OLED , Monochrome	
Duty	1/16	

WINSTAR DISPLAY CO., LTD

Contour Drawing & Block

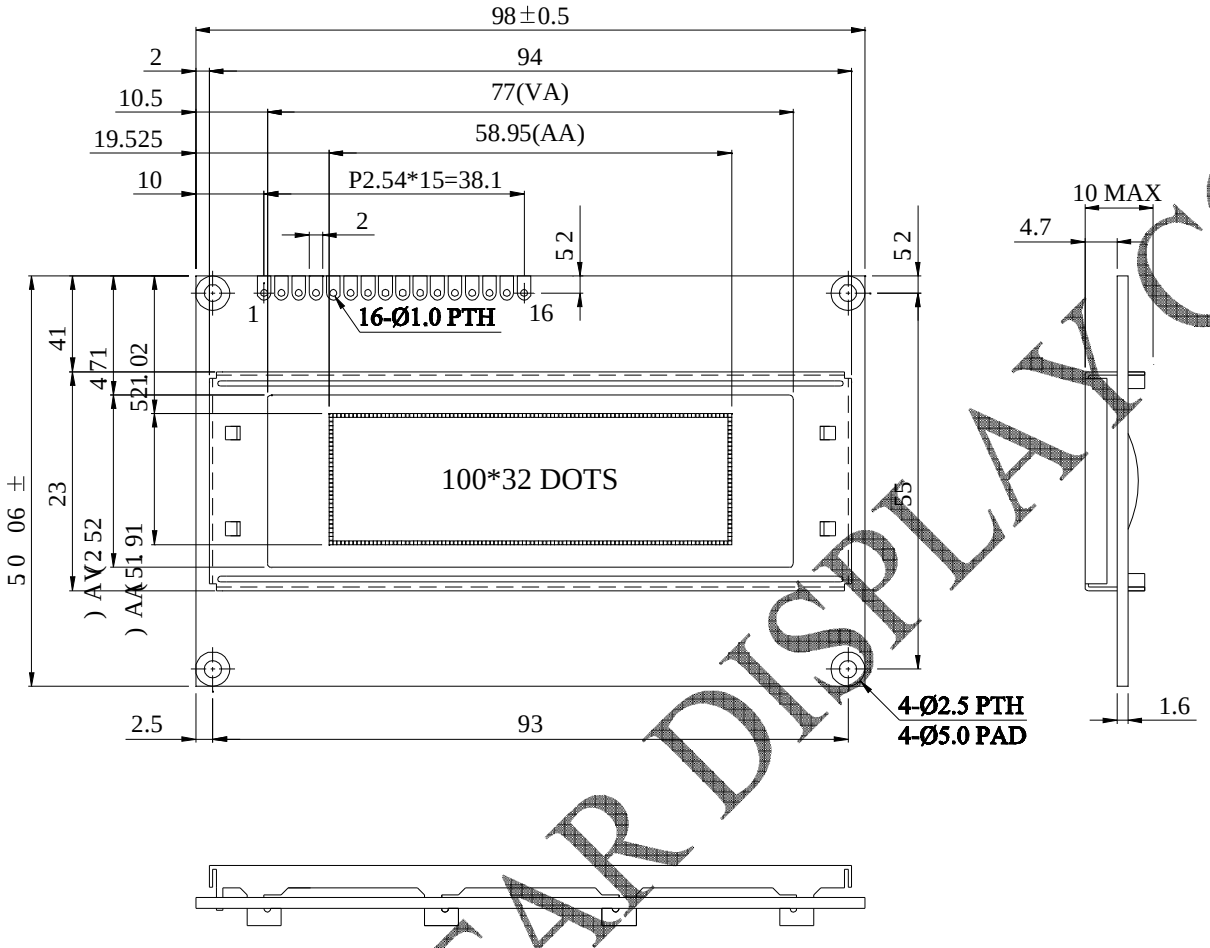



PIN NO.	SYMBOL
1	VSS
2	VDD
3	NC
4	RS
5	R/$\overline{W}$
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	CS1
16	CS2

The non-specified tolerance of dimension is ±0.3 mm .

WINSTAR DISPLAY CO., LTD

Interface Pin Function

Pin No.	Symbol	Level	Description
1	VSS	0V	Ground
2	VDD	5.0V	Supply Voltage for logic
3	NC	—	
4	RS	H/L	H: DATA, L: Instruction code
5	R/W	H/L	H: Read(Module→MPU) L: Write(MPU→Module)
6	E	H,H→L	Chip enable signal
7	DB0	H/L	Data bit 0
8	DB1	H/L	Data bit 1
9	DB2	H/L	Data bit 2
10	DB3	H/L	Data bit 3
11	DB4	H/L	Data bit 4
12	DB5	H/L	Data bit 5
13	DB6	H/L	Data bit 6
14	DB7	H/L	Data bit 7
15	CS1	—	Chip1 select input pin
16	CS2	—	Chip2 select input pin

WINSTAR DISPLAY CO.,LTD

Absolute Maximum Ratings

Item	Symbol	Min	Max	Unit
Operating Temperature	T_{OP}	-40	+80	°C
Storage Temperature	T_{ST}	-40	+85	°C
Supply Voltage For Logic	VDD-V_{SS}	-0.3	5.3	V

Electrical Characteristics

Item	Symbol	Condition	Min	Typ	Max	Unit
Supply Voltage For Logic	VDD-VSS	–	4.8	5.0	5.3	V
Input High Volt.	VIH	–	0.8 VDD	–	VDD	V
Input Low Volt.	VIL	–	GND	–	0.2 VDD	V
Output High Volt.	VOH	IOH=-0.5mA	0.8 VDD	–	VDD	V
Output Low Volt.	VOL	IOL=0.5mA	GND	–	0.2 VDD	V
50% Check Board Operating Current	IDD	VDD=5V	65	70	75	mA

WINSTAR DISPLAY CO LTD