



The drawing contained herein is the exclusive property of WiseChip. It is not allowed to copy, reproduce and or disclose in any formats without permission of WiseChip.

Item	Date	Remark
A	20060804	Original Drawing
B	20060810	Modify Pixel Size
C	20060828	Modify FPC Alignment Mark & FPC Number
D	20071225	Modify IC Protective Film Size Update FPC Number & Revise Pin Definition
E	20100802	Change FPC Protective Tape

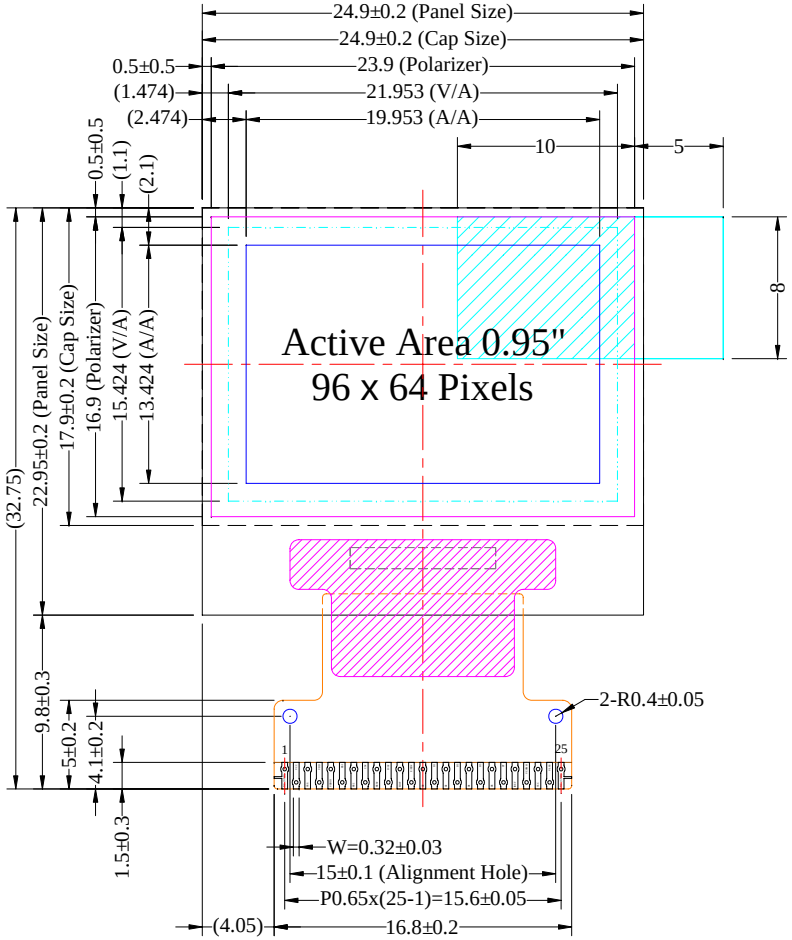

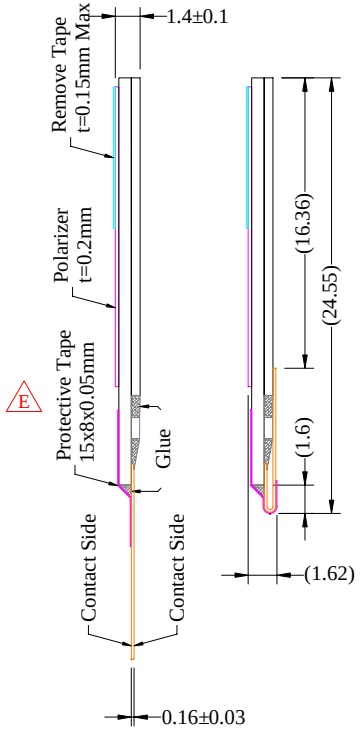

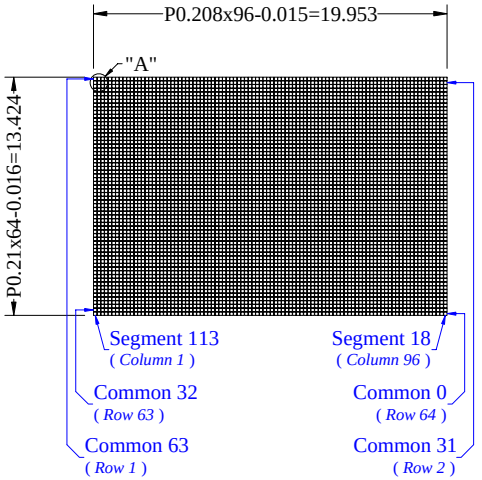



Detail "A"
Scale (10:1)

Pin	Symbol
1	N.C. (GND)
2	VCC
3	VSS
4	VDD
5	VDDIO
6	BS1
7	BS2
8	CS#
9	RES#
10	D/C#
11	R/W#
12	E/RD#
13	D0
14	D1
15	D2
16	D3
17	D4
18	D5
19	D6
20	D7
21	IREF
22	VCOMH
23	VCC
24	VLSS
25	N.C. (GND)

Notes:

1. Color: White
2. Driver IC: SSD1305
3. FPC Number: UT-0205-P02 / UT-0205-P04
4. Interface:
   8-bit 68XX/80XX Parallel, 4-wire SPI, I2C
5. General Tolerance: ±0.30
6. The total thickness (1.50 Max) is without polarizer protective film & remove tape.
   The actual assembled total thickness with above materials should be 1.75 Max.

Customer Approval Signature	WiseChip Semiconductor Inc.						Drawing Number	Rev.
							DMX9664SDGF28	E
	Unless Otherwise Specified		Title	UG-9664HSWAG01 Folding Type OEL Display Module Pixel Number: 96 x 64, Monochrome, COG Package			Material	
	Unit	mm					Soda Lime / Polyimide	
	General Roughness							
	Tolerance			Drawn	E.E.	Panel / E.	P.M.	
	Dimension	±0.3	By	Gary Lin	Ting Kuo Hu	Ivy Lo	Tiffany Hsu	Scale: 1:1 / Sheet: 1 of 1 / Size: A3
	Angle	±1	Date	20100802	20100802	20100802	20100802	