OLED SPECIFICATION

Model No:

WEO25664W#D0D-FC

2.General Specification

Item	Dimension	Unit
Dot Matrix	256 x 64 Dots	—
Module dimension	100.4 x 36.1 x 3.34	mm
Active Area	87.52 x 21.28	mm
Pixel Size	0.312 x 0.303	mm
Pixel Pitch	0.342 x 0.333	mm
Display Mode	Passive Matrix	
Display Color	Monochrome	
Drive Duty	1/64 Duty	
Gray Scale	4 bits	
OLED IC	SSD1322	
OLED Interface	6800,8080,SPI	
Size	3.55 inch	
CTP IC	FT6336U	
Detect Point	1	
CTP Interface	I2C	
Surface	Normal Glare	


Represented by:

first FC components


FIRST Components srl Via Cavour 69, 21020 Buguggiate (VA)

T. +39 0332 1888005 web: www.first-components.com


3.Contour Drawing & Block Diagram

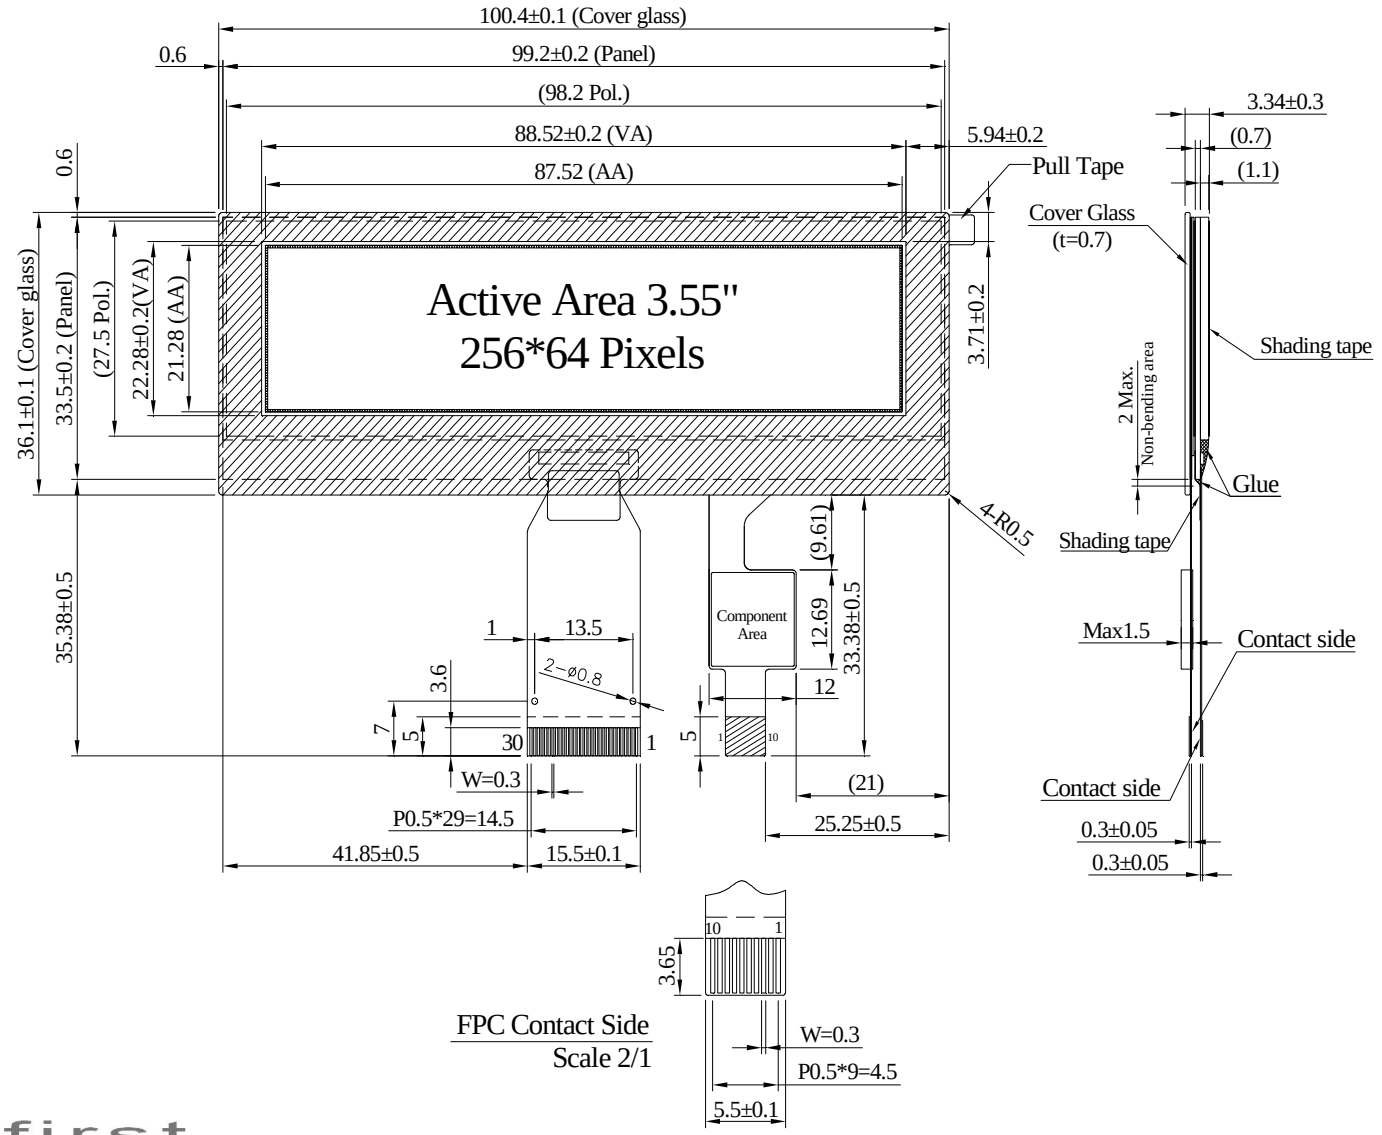

FPC Contact Side
Scale 2/1



Dot Size
Scale:20/1



Touch Panel	
PIN	SYMBOL
1	GND
2	VDD
3	INT
4	SDA
5	SCL
6	RST
7	GND
8	GND
9	GND
10	GND

OLED Module			
PIN	SYMBOL	PIN	SYMBOL
1	ESD GND	16	BS0
2	VSS	17	BS1
3	VCC	18	DC#
4	VCOMH	19	CS#
5	VLSS	20	RES#
6	D7	21	FR
7	D6	22	IREF
8	D5	23	NC
9	D4	24	VDDIO
10	D3	25	VDD
11	D2	26	VCI
12	D1	27	VSL
13	D0	28	VLSS
14	E	29	VCC
15	R/W#	30	ESD GND

The non-specified tolerance of dimension is ±0.3mm.

4.Interface Pin Function

<table>
<tr><th>Pin Number</th><th>Symbol</th><th>I/O</th><th>Function</th></tr>
<tr><td>1</td><td>ESD_GND</td><td>P</td><td>Ground</td></tr>
<tr><td>2</td><td>VSS</td><td>P</td><td>Ground.</td></tr>
<tr><td>3</td><td>VCC</td><td>P</td><td>Power supply for panel driving voltage.
This is also the most positive power voltage supply pin.</td></tr>
<tr><td>4</td><td>VCOMH</td><td>P</td><td>COM signal deselected voltage level.
A capacitor should be connected between this pin and VSS.</td></tr>
<tr><td>5</td><td>VLSS</td><td>P</td><td>Analog system ground pin.</td></tr>
<tr><td>6~13</td><td>D7~D0</td><td>I/O</td><td>Host Data Input/Output Bus
These pins are 8-bit bi-directional data bus to be connected to the microprocessor’s data bus.
When serial mode is selected, D1 will be the serial data input SDIN and D0 will be the serial clock input SCLK.</td></tr>
<tr><td>14</td><td>E/RD#</td><td>I</td><td>Read/Write Enable or Read
This pin is MCU interface input.
When interfacing to a 68XX-series microprocessor, this pin will be used as the Enable (E) signal. Read/write operation is initiated when this pin is pulled high and the CS# is pulled low.
When connecting to an 80XX-microprocessor, this pin receives the Read (RD#) signal. Data read operation is initiated when this pin is pulled low and CS# is pulled low.
When serial mode is selected, this pin must be connected to VSS.</td></tr>
<tr><td>15</td><td>R/W#</td><td>I</td><td>Read/Write Select or Write
This pin is MCU interface input. When interfacing to a 68XX-series microprocessor, this pin will be used as Read/Write (R/W#) selection input. Pull this pin to “High” for read mode and pull it to “Low” for write mode.
When 80XX interface mode is selected, this pin will be the Write (WR#) input. Data write operation is initiated when this pin is pulled low and the CS# is pulled low.
When serial mode is selected, this pin must be connected to VSS.</td></tr>
<tr><td>16</td><td>BS0</td><td rowspan="2">I</td><td rowspan="2">Communicating Protocol Select
These pins are MCU interface selection input. See the following table:
<table>
<tr><th>BS[1:0]</th><th>Bus Interface Selection</th></tr>
<tr><td>00</td><td>4 line SPI</td></tr>
<tr><td>01</td><td>3 line SPI</td></tr>
<tr><td>10</td><td>8-bit 8080 parallel</td></tr>
<tr><td>11</td><td>8-bit 6800 parallel</td></tr>
</table>
Note
(1) 0 is connected to VSS
(2) 1 is connected to VDDIO</td></tr>
<tr><td>17</td><td>BS1</td></tr>
<tr><td>18</td><td>D/C#</td><td>I</td><td>Data/Command Control
This pin is Data/Command control pin connecting to the MCU.
When the pin is pulled HIGH, the content at D[7:0] will be interpreted as data.
When the pin is pulled LOW, the content at D[7:0] will be interpreted as command.</td></tr>
</table>

19	**CS#**	I	***Data/Command Control*** This pin is the chip select input connecting to the MCU. The chip is enabled for MCU communication only when CS# is pulled LOW.
20	**RES#**	I	This pin is reset signal input. When the pin is pulled LOW, initialization of the chip is executed. Keep this pin pull HIGH during normal operation.
21	**FR**	O	This pin is No Connection pins. Nothing should be connected to this pin. This pin should be left open individually.
22	**IREF**	I	***Current Reference for Brightness Adjustment*** This pin is segment current reference pin. A resistor should be connected between this pin and VSS. Set the current lower than 10uA.
23	**N.C.**	-	***Reserved Pin*** The N.C. pin between function pins are reserved for compatible and flexible design.
24	**VDDIO**	P	***Power Supply for I/O Pin*** It should be matched with the MCU interface voltage level.
25	**VDD**	P	***Power Supply for Core Logic Circuit*** Power supply pin for core logic operation. A capacitor is required to connect between this pin and VSS
26	**VCI**	P	***Power Supply for Operation*** VCI must always be equal to or higher than VDD and VDDIO.
27	**VSL**	P	***Voltage Output Low Level for SEG Signal*** This is segment voltage reference pin. When external VSL is not used, this pin should be left open. When external VSL is used, this pin should connect with resistor and diode to ground.
28	**VLSS**	P	***Ground of Analog Circuit*** These are the analog ground pins. They should be connected to VSS externally.
29	**VCC**	P	***Power Supply for OLED Panel*** These are the most positive voltage supply pin of the chip. They must be connected to external source.
30	**ESD GND**	P	Ground

CTP- Pin Function

1	**GND**	Ground.
2	**VDD**	Power Supply Voltage of CTP
3	**INT**	External interrupt to the host
4	**SDA**	I2C data input and output
5	**SCL**	I2C clock input
6	**RST**	External Reset, Low is active
7-10	**GND**	Ground.

5.Absolute Maximum Ratings

5.1 Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Unit	Notes
Supply Voltage for Operation	VCI	-0.3	4	V	1, 2
Supply Voltage for Logic	VDD	-0.5	2.75	V	1, 2
Supply Voltage for I/O Pins	VDDIO	-0.5	VCI	V	1, 2
Supply Voltage for Display	VCC	-0.5	20	V	1, 2
Operating Temperature	TOP	-20	70	°C	—
Storage Temperature	TSTG	-30	80	°C	—

Note 1: All the above voltages are on the basis of “VSS = 0V”.

Note 2: When this module is used beyond the above absolute maximum ratings, permanent breakage of the module may occur. Also, for normal operations, it is desirable to use this module under the conditions according to Section 6 ‘’Electrical Characteristics’’. If this module is used beyond these conditions, malfunctioning of the module can occur and the reliability of the module may deteriorate

5.2 Touch Panel Controller FT6336U

Parameter	Symbol	Min	Max	Unit	Notes
Power Supply Voltage	VDD	-0.3	3.6	V	1

Note 1: If used beyond the absolute maximum ratings, CTP IC may be permanently damaged. It is strongly recommended that the device be used within the electrical characteristics in normal operations. If exposed to the condition not within the electrical characteristics, it may affect the reliability of the device.