


first FC components


PIN NO.	SYMBOL
1	VOUT
2	CAP1N
3	CAP1P
4	VDD
5	VSS
6	SDA
7	SCL
8	RST

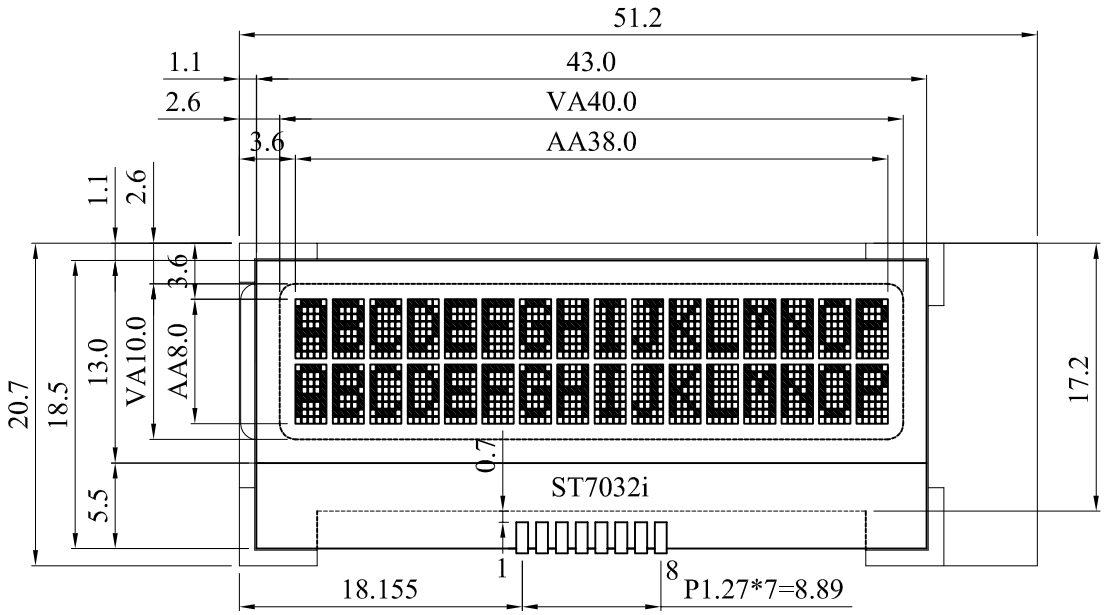

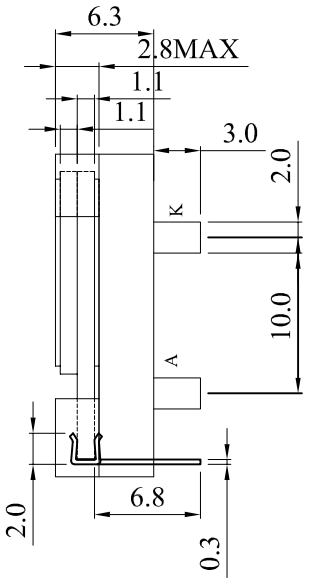

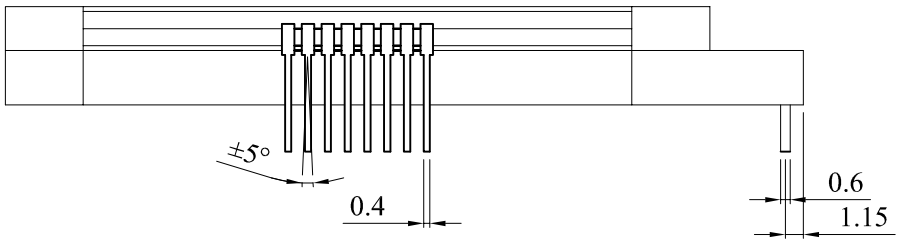

1	Lcd Type	FSTN
2	Viewing Direction	6 O'clock
3	Drive Method	1/16 DUTY,1/5BIAS
4	Polarizer Mode	Transflective/Positive
5	VDD	3.0V , 5.0V
6	VOP	4.5V
7	Operating Temperature	-30°C ~80°C
8	Storage Temperature	-35°C ~85°C
9	Backlight	LED WHITE (3020) 3.5V 32mA 2DICES
10	IC	ST7032i

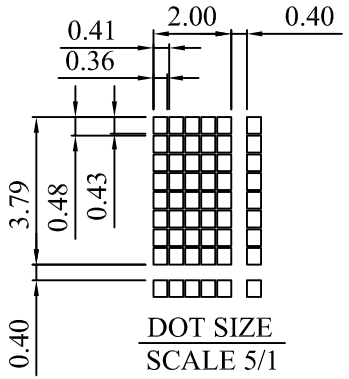

The non-specified tolerance of dimension is ±0.2mm.

SCALE: 2/1	UNIT: mm	華凌光電股份有限公司 WINSTAR DISPLAY CO.	
REV: 0	PAGE: 1/1		
APPROVE	賴國堅 02/18/16'	MODEL	WO1602AT-85HI#000-FC
CHECK	Molica 02/18/16'	TITLE	LCM DRAWING
DRAW	Molica 02/18/16'	DWG NO.	T-050210