Next Vision Display
Brighten The Future

Represented by:

FIRST Components s.r.l.
www.first-components.com
technical@first-components.com
+39 0332 1888005

P/N: NM156-C002TT

Datasheet


15.6" touch monitor

Image	I/O view
	

Specifications

System	A/D board	RTD2556	RTD2513
	I/O	1*DC(12V-36V)	
		1*RJ45-USB(FOR TOUCH)	
		1*DVI	
		1 x HDMI,1*VGA	
		1 x VGA	
Physical Characteristics	Dimensions	420*269*70mm	
	Weight	1.8KG	
LCD	Display Type	15.6" a-Si TFT-LCD (LED backlight)	
	Resolution	1920*1080	
	Aspect ratio	16:9	
	Viewing Angle	85(left), 85 (right), 85 (up), 85 (down)	
	Viewing area	345.15(W)×194.58(H) mm	
	Luminance (cd/m2)	800 nits	
	Contrast Ratio	1000:1	
	Backlight Lifetime	50,000hr(min.)	
OS Support	OS Support	Microsoft® Windows 7(32/64-bit)/10(64-bit), WES7P, Windows 10 IOT LTSC, Linux	
Power Consumption	Input Voltage	12 ~ 24 VDC	
	Power Consumption	10W (burn-in test in Win 7 64-bit)	
Touchscreen	Touch Type	no touch/5 wire resistive touch/10-point multi-touch projected capacitive	
	Light Transmission	90 % ± 2 %	
	Controller	USB interface	
Environment	Operating Temperature	-10 ~ 60 °C	
	Storage Temperature	-20 ~ 70 °C (-4 ~ 140 °F)	
	Relative Humidity	10 ~ 95% @ 40 °C (non-condensing)	
	Shock	Operating 10 G peak acceleration (11 ms duration)	
	Vibration	Operating Random Vibration Test 5 ~ 500Hz, 1Grms @with HDD; 2Grms @with SSD	
	EMC	CE, FCC Class B, BSMI, EN 60601-1-2	
	Safety	CCC,ISO9001	
	Front Panel Protection	IP65 compliant	

Dimension

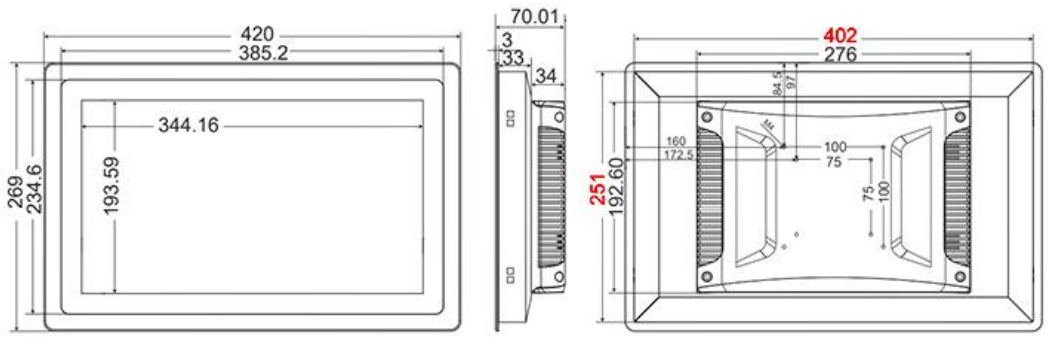

NEXT VISION DISPLAY Co.

地址: 中國上海小木橋路600號
ADD: 600 XIAO MU QIAO ROAD
SHANGHAI CHINA

TEL: 86-21-6403-2198
sales@nextvisiondisplay.com

WEB: https://www.nextvisiondisplay.com/