


The drawing contained herein is the exclusive property of WiseChip. It is not allowed to copy, reproduce and or disclose in any formats without permission of WiseChip.


Item	Date	Remark
A	20100409	Original Drawing
B	20101229	Modify Pin Define

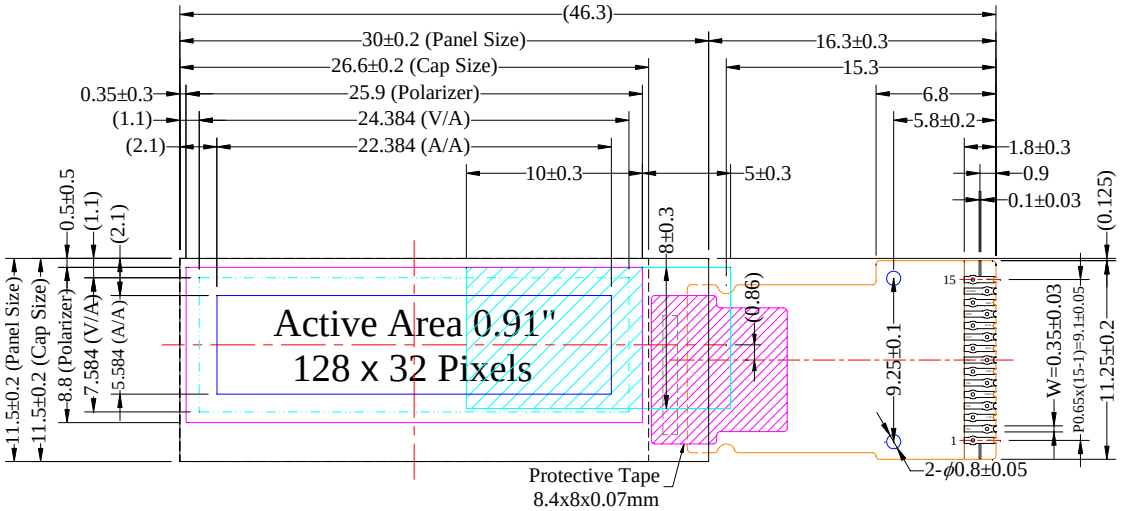


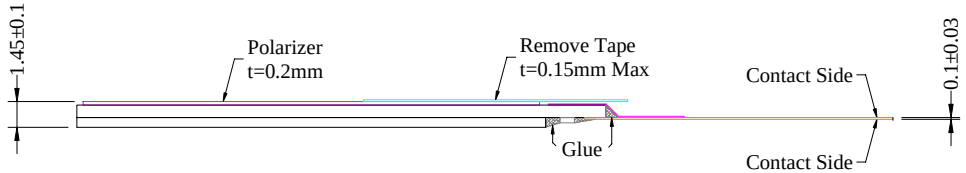

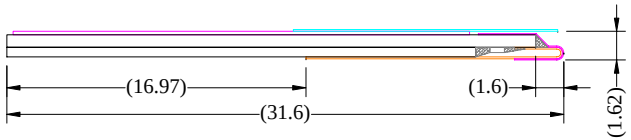

(Reference Mechnical Design)

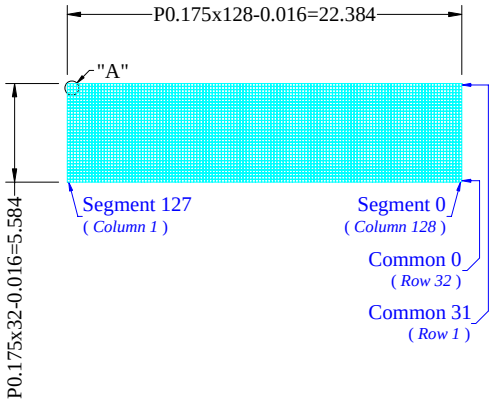



Detail "A"
Scale (10:1)

B

Pin	Symbol
1	C2P
2	C2N
3	C1P
4	C1N
5	VDDB
6	VSS
7	VDD
8	CS#
9	RES#
10	D/C#
11	SCLK
12	SDIN
13	IREF
14	VCOMH
15	VCC

Notes:

1. Color: Light Blue
2. Driver IC: SSD1306
3. FPC Number: UT-0206-P06
4. Interface: 4-wire SPI
5. General Tolerance: ±0.30
6. The total thickness (1.55 Max) is without polarizer protective film & remove tape.
   The actual assembled total thickness with above materials should be 1.80 Max.

Customer Approval Signature	WiseChip Semiconductor Inc.						Drawing Number	Rev.
							DMX2832SDGF38	B
	Unless Otherwise Specified		Title	UG-2832HLBEG04 Folding Type OEL Display Module Pixel Number: 128 x 32, Monochrome, COG Package			Material	
	Unit	mm					Soda Lime / Polyimide	
	General Roughness							
	Tolerance			Drawn	E.E.	Panel / E.	P.M.	
	Dimension	±0.3	By	Gary Lin	Ting-Kuo Hu	Ivy Lo	Tiffany Hsu	Scale / Sheet / Size
	Angle	±1	Date	20101229	20101229	20101229	20101229	1:1 / 1 of 1 / A3